


FLEX STACK

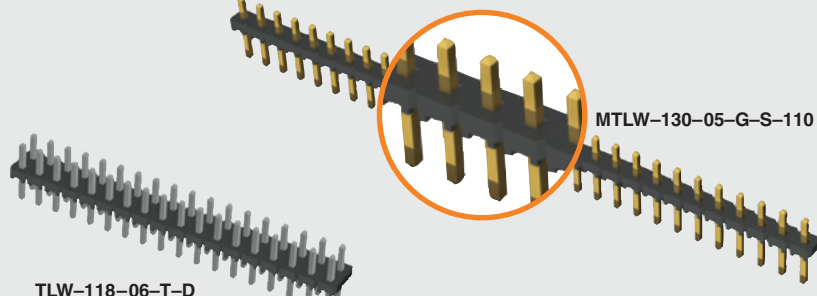

MTLW-130-05-G-S-110

TLW-118-06-T-D

TLW, MTLW SERIES


(2.54 mm) .100"

LOW-PROFILE .025" SQ POST HEADERS

Board Mates:
BSW, CES, SLW, HLE

FEATURES

These headers provide the ultimate low-profile (0.64 mm) .025" square post board stacking system. The high quality Phosphor Bronze terminals are available with a standard short post height (TLW Series) for mating with low-profile sockets, or the post height can be Modified (MTLW Series) to accommodate IDC assemblies and other applications.



TLW	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION												
01 thru 40 = Single Row 			Specify LEAD STYLE from chart 	-F = Gold flash on post, Matte Tin on tail	-S = Single Row	-RA = Right-angle (-01 Lead Style only)												
01 thru 36 = Double Row 				-G = 10 μ" (0.25 μm) Gold on post, Gold flash on tail	-D = Double Row	-“XX” = Polarized Position Specify position for omitted pin.												
			<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>A</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>N/A</td> <td>(5.84) .230</td> </tr> <tr> <td>-05</td> <td>(4.32) .170</td> <td>(2.67) .105</td> </tr> <tr> <td>-06</td> <td>(3.43) .135</td> <td>(2.67) .105</td> </tr> </tbody> </table>	LEAD STYLE	A	C	-01	N/A	(5.84) .230	-05	(4.32) .170	(2.67) .105	-06	(3.43) .135	(2.67) .105	-T = Matte Tin		
LEAD STYLE	A	C																
-01	N/A	(5.84) .230																
-05	(4.32) .170	(2.67) .105																
-06	(3.43) .135	(2.67) .105																

ALSO AVAILABLE
(MOQ Required)

- Other platings

SPECIFICATIONS

For complete specifications see www.samtec.com?TLW or www.samtec.com?MTLW

Insulator Material: Black Liquid Crystal Polymer
Terminal Material: Phosphor Bronze
Plating: Au or Sn over 50 μ" (1.27 μm) Ni
Current Rating (TLW/SLW): 5.2 A per pin (2 pins powered)
Operating Temp Range: -55 °C to +105 °C with Tin, -55 °C to +125 °C with Gold
RoHS Compliant: Yes
Lead-Free Solderable: Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note: Some lengths, styles and options are non-standard, non-returnable. MTLW Series is non-standard, non-returnable.

MTLW	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	POST HEIGHT																			
01 thru 40 = Single Row 			Specify LEAD STYLE from chart 		-S = Single Row	-“XXX” = Post Height Dimension (In inches)																			
01 thru 36 = Double Row 				<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr> <td>-05</td> <td>(8.51) .335</td> </tr> <tr> <td>-06</td> <td>(7.62) .300</td> </tr> <tr> <td>-07</td> <td>(10.92) .430</td> </tr> <tr> <td>-08</td> <td>(13.46) .530</td> </tr> <tr> <td>-09</td> <td>(18.54) .730</td> </tr> <tr> <td>-10</td> <td>(21.08) .830</td> </tr> <tr> <td>-22</td> <td>(16.00) .630</td> </tr> <tr> <td>-23</td> <td>(11.30) .445</td> </tr> <tr> <td>-24</td> <td>(12.19) .480</td> </tr> </tbody> </table>	LEAD STYLE		OAL	-05	(8.51) .335	-06	(7.62) .300	-07	(10.92) .430	-08	(13.46) .530	-09	(18.54) .730	-10	(21.08) .830	-22	(16.00) .630	-23	(11.30) .445	-24	(12.19) .480
LEAD STYLE	OAL																								
-05	(8.51) .335																								
-06	(7.62) .300																								
-07	(10.92) .430																								
-08	(13.46) .530																								
-09	(18.54) .730																								
-10	(21.08) .830																								
-22	(16.00) .630																								
-23	(11.30) .445																								
-24	(12.19) .480																								
				-G = 10 μ" (0.25 μm) Gold on post, Gold flash on tail																					
				-T = Matte Tin																					

Due to technical progress, all designs, specifications and components are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65781-047](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#)