




ALL NEW PRODUCTS!

HEYClip™ Unscrewing Snap Rivets

WILL FIT THESE PANELS						PART NO.	DESCRIPTION	PART DIMENSIONS						STYLE
MOUNTING HOLE DIA.	ASSEMBLED PANEL THICKNESS				Black			A Length		B Head Height		C Head Diameter		
	in.	mm.	Min. in.	Max. mm.				in.	mm.	in.	mm.	in.	mm.	
HUSR Series														
.197	5,0	.059	1,5	.236	6,0	4330	HUSR 197-158	.43	11,0	.15	3,9	.47	12,0	1
.236	6,0					4331	HUSR 236-059	.43	11,0	.15	3,9	.63	16,0	
.315	8,0	.118	3,0	.394	10,0	4332	HUSR 315-118	.55	14,0	.16	4,0	.79	20,0	2
		.276	7,0	.315	8,0	4333	HUSR 315-276	.87	22,0	.14	3,6	.79	20,0	

Standard color black.

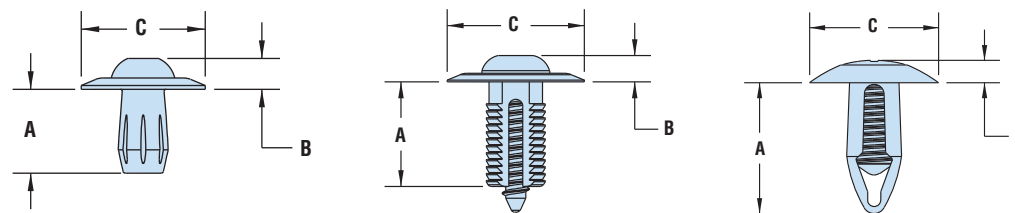

Style 1

Style 2

Style 3


• Phillips head screw driver required for removal.



HEYClip™ Mini Tough Rivets

WILL FIT THESE PANELS						PART NO.	DESCRIPTION	PART DIMENSIONS					
MOUNTING HOLE DIA.	ASSEMBLED PANEL THICKNESS				Black			A Length		B Head Height		C Head Diameter	
	in.	mm.	Min. in.	Max. mm.				in.	mm.	in.	mm.	in.	mm.
MTR Series													
.125	3,2	.155	3,9	.180	4,6	12475	MTR 180-125	.37	9,4	.05	1,3	.22	5,5
.150	3,8	.265	6,7	.290	7,4	12477	MTR 290-150	.47	11,9	.05	1,3	.30	7,6

Standard color black.

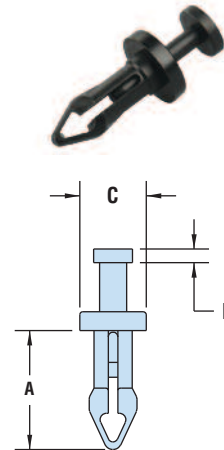


MTR Series

HEYClip™ Mounting Buttons

WILL FIT THESE PANELS						PART NO.	DESCRIPTION	PART DIMENSIONS					
MOUNTING HOLE DIA.	ASSEMBLED PANEL THICKNESS				Natural			A Length		B Head Height		C Head Diameter	
	in.	mm.	Min. in.	Max. mm.				in.	mm.	in.	mm.	in.	mm.
HMP Series													
.156	4,0	.031	0,8	.100	2,4	4251	HMP 156-031	.24	6.1				
		.094	2,4	.157	4,0	4252	HMP 156-094	.30	7.7				
		.189	4,8	.220	5,6	4253	HMP 156-189	.40	10.1				
		.220	5,6	.312	7,1	4254	HMP 156-220	.43	10.9				
		.312	7,9	.375	9,5	4255	HMP 156-312	.52	13.2	.19	4,8	.38	9,5
		.375	9,5	.437	11,1	4256	HMP 156-375	.58	14.8				
		.437	11,1	.500	12,7	4257	HMP 156-437	.65	16.4				
		.500	12,7	.563	14,3	4258	HMP 156-500	.71	18.0				
		.563	14,3	.625	15,9	4259	HMP 156-563	.77	19.6				

Standard color natural.

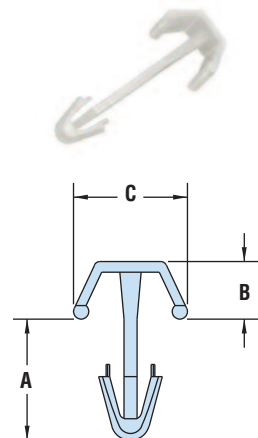

HMP Series

	HUSR & HMP	MTR
Material	Nylon 6/6	Heat stabilized Nylon 6
Flammability Rating	94V-2	94 V-2
Temperature Range	32°F (0°C) to 185°F (85°C)	32°F (0°C) to 230°F (110°C)