

製品仕様書
Product Specification

3M 印
MDR
ボードマウント リセプタクル
ストレートタイプ
102XX-62X2 PX

3M Brand
MDR
Board Mount Receptacle
Straight Type
102XX-62X2 PX

APRV. *T. Shirogane* 8/18 2004

CHKD. *T. Shirogane* 8/18 2004

PRPD. *T. Nagane* 8/18, 2004

**SUMITOMO 3M LIMITED**

ELECTRONIC SOLUTIONS DIVISION
TECHNICAL DEPARTMENT

目次 / CONTENTS

	頁 / PAGE
1. 機能	1
FUNCTION	6
2. 適合対象	1
COMPATIBLE OBJECTS	6
3. 関連仕様図	1
RELATED SPECIFICATION DRAWINGS	6
4. 関連規格類	1
RELATED TEST STANDARDS	6
5. 適用	2
APPLICATION	7
6. 品質特性	3
QUALITY PERFORMANCE	8
7. 製品上めつき仕様識別表示	5
PLATING SPEC INDICATION ON CONNECTOR	10
8. 包装&表示	5
PACKAGE & IDENTIFICATION	10
9. 保管	5
STORAGE	10
10. 注意事項	5
ATTENTIONS	10

1. FUNCTION

This connector is one of MDR board mount receptacle straight series. And mating side has 2 rows of female contacts with the pitch of 1.27mm and contact tails are arranged in 1.27mm×1.905mm staggered grid. This connector can be mounted on the compatible PC board and mating with MDR plug connector enables to have the electrical performance.

This connector is grounded by screw lockdown.

2. COMPATIBLE OBJECTS

2-1 COMPATIBLE CONNECTORS

3M BRAND MDR PLUG : 101XX-XXXX XX

2-2 COMPATIBLE PC BOARDS

PCB with solder plating hole

See RELATED SPECIFICATION DRAWINGS recommended hole pattern.

4U-0010-0466-2

3. RELATED SPECIFICATION DRAWINGS

See the drawings described in JNPD-0814.

4. RELATED TEST STANDARDS

MIL-STD-202

JEIDA-38-1984

JIS C 0050


JNTM-0039, JNTM-0040

*JNTM: Test Method Standard of Sumitomo 3M for Electronic and Electrical Component Parts.

5. APPLICATION

PRODUCT NUMBER INFORMATION

102 XX - 6 2 X 2 PX

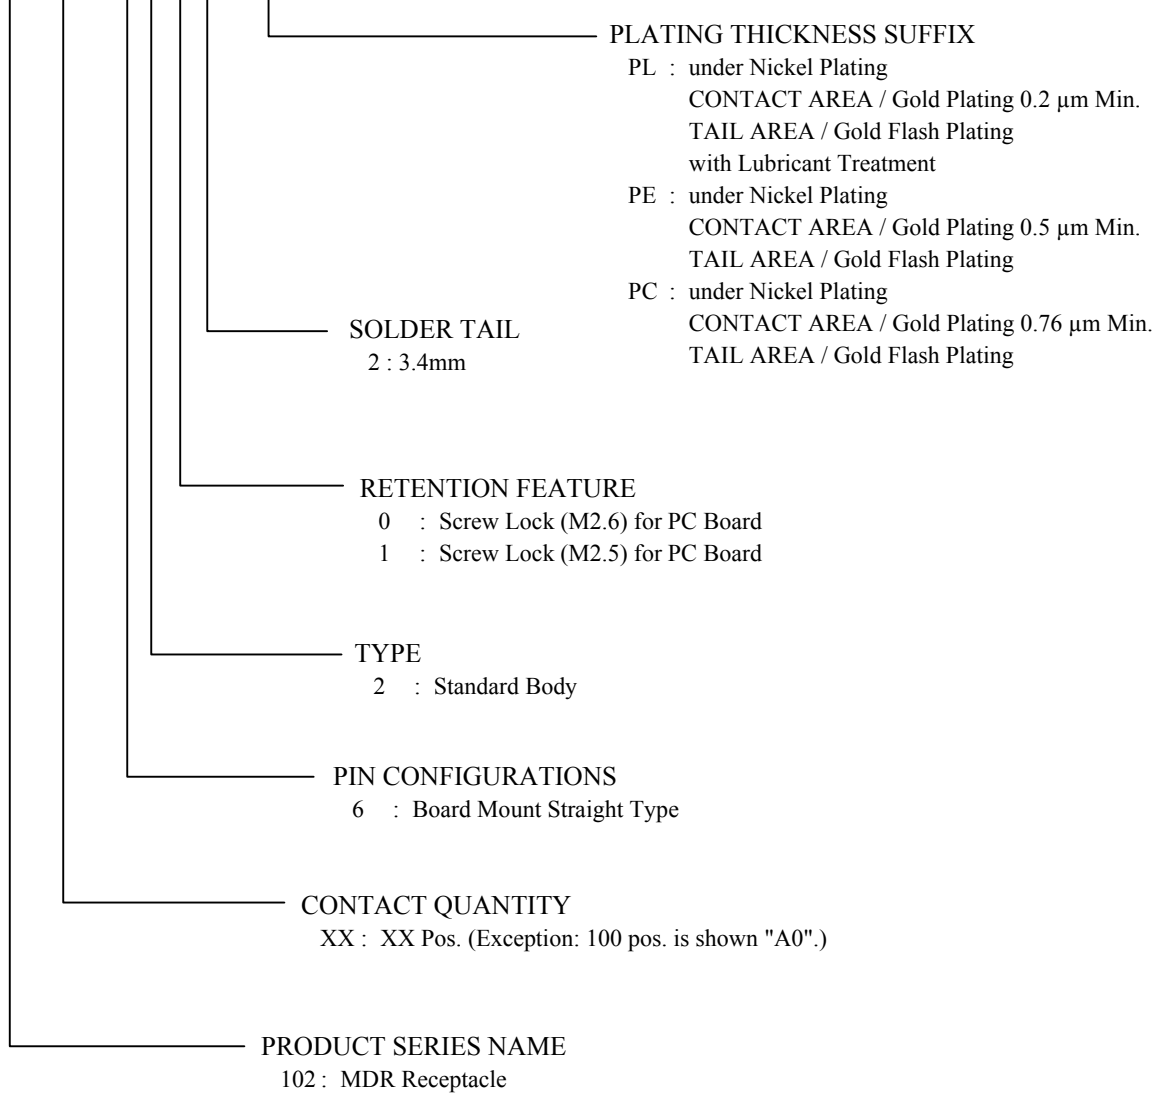

6. QUALITY PERFORMANCE

6-1 RATING

ITEM	RATING
CURRENT	0.5A Max.
VOLTAGE	AC: 150V Max. / DC: 200V Max.
TEMPERATURE	-55°C ~ 85°C

6-2 PHYSICAL SPECIFICATIONS

* The value in () is reference.

TEST DESCRIPTION	REQUIREMENT	TEST CONDITION	RELATED STANDARD
CONTACT RETENTION FORCE	7.85N (0.8 kgf) Min.	Tensile speed 5mm / min.	_____
INSERTION & WITHDRAWAL FORCE	Insertion Force: 1.47N (150 gf) Max. Withdrawal Force: 0.39N (40 gf) Min.	Tensile speed 5mm / min with Compatible connector. Spec. Value is estimated by one contact pin.	_____
CONTACT SOLDER ABILITY	Wetting: 95% Min. or Zero cross time: 3 seconds Max.	Solder: Sn-3Ag-0.5Cu - Wetting Measurement: 245°C, 3 seconds - Wetting Balance Method: 245°C	JNTM-0039 JIS C 0050
SOLDERING HEAT RESISTANCE	Connector should not have any defect portions after test.	Dip soldering: 260°C, 10 seconds, 2 times or 263°C, 5seconds, 2 times * Pre-heat Condition: Temp. of Components 100°C Max. Duration 60 seconds Max. Soldering iron: 390°C, 3 seconds, 2 times	JNTM-0040

6-3 ELECTRICAL SPECIFICATIONS

TEST DESCRIPTION	REQUIREMENT	TEST CONDITION	RELATED STANDARD
DIELECTRIC WITHSTANDING VOLTAGE	No appearance of arcing and break down. Leak current: 1mA Max.	Impressed voltage is AC 500V rms. between adjacent two contacts for one minute.	_____
INSULATION RESISTANCE	500M Ω Min.	Impressed voltage is DC 500V between adjacent two contacts for one minute.	_____
DISCONTINUITY	Less than 1 μ s	- Vibration test * as the part of 3M SEQUENCE-II - Mechanical sock test	See Table 1.
CONTACT RESISTANCE	Initial / for each plating spec. 35m Ω Max.	Contact resistance is measured at Short Circuit. Current: 1.5mA Open Circuit Voltage: 20mV by 4 terminal method. * Measurement values include the resistance of contact pins as conductive material.	See Table 1.
	Change of contact resistance after evaluation tests/ for each plating spec. \pm 25m Ω Max.	(1) <u>PL Plating</u> 3M SEQUENCE -I / mating (30 cycles) \rightarrow moisture \rightarrow salt spray 3M SEQUENCE -II / thermal shock \rightarrow humidity \rightarrow vibration 3M SEQUENCE -III / thermal life H ₂ S GAS SEQUENCE / mating (30 cycles) \rightarrow H ₂ S gas DURABILITY / 300 cycles MECHANICAL SHOCK / (2) <u>PE Plating and PC Plating</u> 3M SEQUENCE -I / mating (50 cycles) \rightarrow moisture \rightarrow salt spray 3M SEQUENCE -II / thermal shock \rightarrow humidity \rightarrow vibration 3M SEQUENCE -III / thermal life H ₂ S GAS SEQUENCE / mating (50 cycles) \rightarrow H ₂ S gas DURABILITY / 500 cycles * NOTE: See Table 1. for environmental tests.	

Table 1: ENVIROMENTAL TEST

ITEM	TEST CONDITION	RELATED STANDARD
MOISTURE	-10 ~ 65°C, Relative Humidity 95% / 10 cycles	MIL-STD-202F106D
SALT SPRAY	NaCl 5% solution, 35°C / 48 hours	MIL-STD-202F101D
THERMAL SHOCK	-55°C→25°C→85°C→25°C / 5 cycles	MIL-STD-202F107G
HUMIDITY (STEADY STATE)	40°C, Relative Humidity 95% / 96 hours	MIL-STD-202F103B
THERMAL LIFE	Steady Current: Current Rating × 110%, 85°C / 1000 hours	—————
H ₂ S GAS	3 ± 1 ppm, 40°C, Relative Humidity 70 ~ 80% / 96 hours	JEIDA-38-1984
VIBRATION	Sweep Freq.: 10 ~ 55Hz, Amplitude: 1.52mm (or 98 m/s ²) Sweep Cycle: 1 min., Sweep time: 2 hours Sweep Directions: X, Y, Z	MIL-STD-202F201A
MECHANICAL SHOCK	490 m/s ² , 11ms, Half sine shock pulse. 3 times / X,Y,Z directions (Total 9 times)	MIL-STD-202E213B

7. PLATING SPEC INDICATION ON CONNECTOR

The first letter, in stamped 3 letters on the connector body for lot numbering, identified the following plating specs.

R XX : PL plating

Z XX : PE plating

Y XX : PC plating

* XX : two alphabet letters

8. PACKAGE & IDENTIFICATION

These products are packed with plastic tray and carton box for transit.

Carton box is identified by part number, quantity, maker name and lot number.

9. STORAGE

This products shall be stored in a room, ambient temperature 5 ~ 35°C, and ambient humidity 40 ~ 70%.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Micro-D Connectors](#) category:

Click to view products by [3M](#) manufacturer:

Other Similar products are found below :

[89076GBEPR](#) [65-1920-15](#) [M83513/03-A10N](#) [M83513/03-G09N](#) [M83513/03-G12N](#) [M83513/04-E15N](#) [M83513/04-G04C](#) [M83513/22-D01NP](#) [664020C06F060](#) [6R2004A30F015](#) [6R4006A28A120](#) [703006A13F060](#) [704002A03F200](#) [705001A13F120](#) [71-147714-19P](#) [7-1532020-5](#) [748567-1-P](#) [MDB1-9SH001](#) [MDM-15PBS-L58](#) [MDM-15PCBRM7T](#) [MDM-15PH001M7-A174](#) [MDM-15PH003B-A174](#) [MDM-15SH004B](#) [MDM-15SH048B](#) [MDM-25PH003B-A174](#) [MDM-37PH006L-A174](#) [MDM-51PSF](#) [MDM-9PH003M7](#) [MDM-9SH001P](#) [MDM-9SH006B](#) [790-027SH-10P4MEP](#) [790-041PJ-25P2MPA](#) [790-043PJ-7P7MPB](#) [791-004SH-66MSA](#) [7R3A00A19A1201](#) [7R5006A19A120](#) [803000C02M020](#) [803001B02M040](#) [803001D01M040](#) [8030N1A09M020](#) [804001B03M100](#) [804006B03M100](#) [804006C02M030](#) [MLDM2L-21SCBRP-.110](#) [85043GULSR](#) [883020E03M030](#) [883031D01M030](#) [883033B03M020](#) [884030A09M040](#) [884030K03M040](#)