3M™ Mini D Ribbon (MDR) Cable Assembly

.050" High Speed Digital Data Transmission System, 26 Position

1W226-TZLB-XXX-0LC



- Supports LVDS Channel LinkTM signaling
- Supports Camera Link® Specification V1.0
- 11 shielded pairs (100 ohm) +4 grounds for high bandwidth applications
- High density 26 position MDR with rugged ribbon type contact
- · Overmolded backshell
- Thumbscrew latching options
- Used for bulkhead connection, or rack IO panel connection
- Used to extend the length of a standard Camera Link® cable assembly
- RoHS* compliant

Date Modified: May 29, 2006

TS-2106-03 Sheet 1 of 3

Physical

Connector Contact Plating

Wiping Area: 30μ" [0.76μm] Min. Gold

Shell Color: Beige

Shell Material: Acrylonitrile Butadiene Styrene (ABS)

Cable Color: Beige

Cable Jacket Material: Polyvinyl Chloride (PVC)

Cable Flammability: AWM VW-1

Electrical

Voltage Rating: 30 V Current Rating: 1 A

Insulation Resistance: $> 1 \times 10^8 \Omega$ at @ 100 Vdc **Withstanding Voltage:** 350 Vrms for 1 minute

Individually Shielded Twisted Pairs

Characteristic Impedance: $100 \pm 10\Omega$

Conductor Size: 28 AWG Stranded
Propogation Velocity: 1.25 ns/ft [4.1 ns/m]
Skew (within pair): 50 ps / meter maximum

Skew (channel skew per chipset): 50 ps / meter maximum

Environmental

UL File No.: E86982

Temperature Rating: -20°C to $+75^{\circ}\text{C}$

*RoHS = Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment "RoHS compliant" means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's knowledge and belief based upon information provided by third party suppliers to 3M.


Channel Link is a trademark of National Semiconductor.

Camera Link is a certification mark of Automated Imaging Association.

3M™ Mini D Ribbon (MDR) Cable Assembly

.050" High Speed Digital Data Transmission System, 26 Position

1W226-TZLB-XXX-0LC

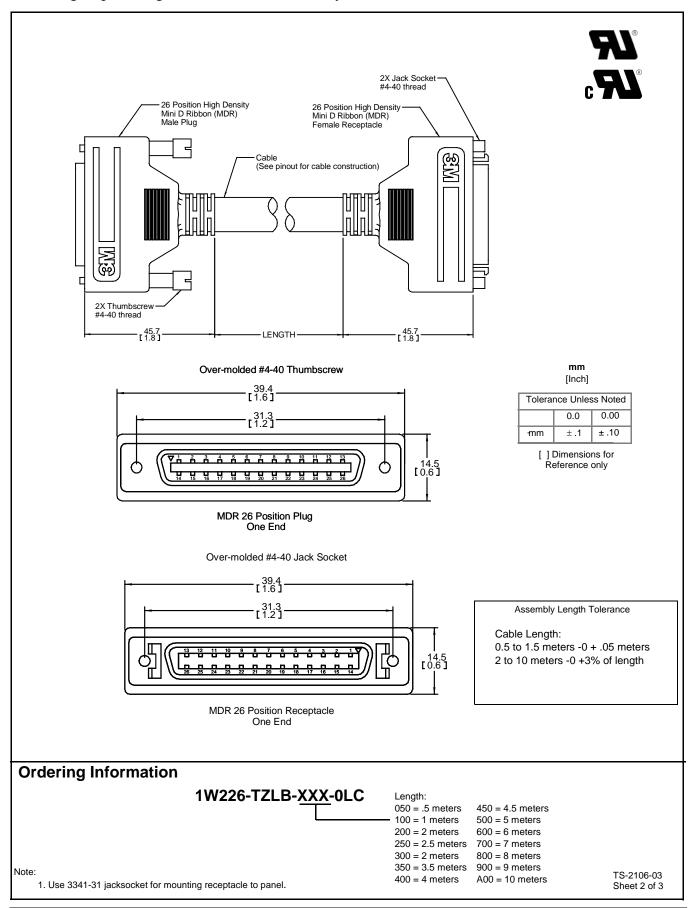

3M™ Mini D Ribbon (MDR) Cable Assembly

.050" High Speed Digital Data Transmission System, 26 Position 1W226-TZLB-XXX-0LC

MDR 26 Position Pinout						
P1				P2		
<u>Pair</u>	<u>Signal</u>	Position		<u>Pair</u>	<u>Signal</u>	Position
shld	Ishld	26		shld	Ishld	26
shld	Ishld	13		shld	Ishld	13
1	Y0-	25		1	Y0-	25
1	Y0+	12		1	Y0+	12
2	Y1-	24		2	Y1-	24
2	Y1+	11		2	Y1+	11
3	Y2-	23		3	Y2-	23
3	Y2+	10		3	Y2+	10
4	Yelk-	22		4	Yelk-	22
4	Yelk+	9		4	Yelk+	9
5	Y3-	21		5	Y3-	21
5	Y3+	8		5	Y3+	8
6	100Ohm	20		6	100Ohm	20
6	term	7		6	term	7
7	Z0-	19		7	Z0-	19
7	Z0+	6		7	Z0+	6
8	Z1-	18		8	Z1-	18
8	Z1+	5		8	Z1+	5
9	Z2-	17		9	Z2-	17
9	Z2+	4		9	Z2+	4
10	Zelk-	16		10	Zelk-	16
10	Zelk+	3		10	Zelk+	3
11	Z3-	15		11	Z3-	15
11	Z3+	2		11	Z3+	2
shld	Ishld	14		shld	Ishld	14
shld	Ishld	1		shld	Ishld	1

TS-2106-03 Sheet 3 of 3

All pairs are individually shielded with aluminum foil.
Pair shields are wrapped Aluminum out and in contact with six internal drains (logic ground).
Outer braid and foil (chassis ground) is isolated from inner drains (logic ground).

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



3M Electronics

6801 River Place Blvd. Austin, TX 78726-9000 800/225-5373 www.3M.com/electronics

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.



Minimum 10% Post-Consumer Fiber Printed in USA.

© 3M 2006

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Cables category:

Click to view products by 3M manufacturer:

Other Similar products are found below:

1200980218 1200980067 RB09P09P-006 RB09P09P-012 RB15P15P-006 RB25P25P-006 RB25P25P-012 RB37P37P-024 172-0906 SHD15P15S-012 SHD15P15S-036 SHD15P15S-060 177-710-1-9S6K7-24MNN ACL-10137-2MM RB09P09P-024 319285-3 RS422-OM2 SHD26P26S-060 SHD44P44S-036 73-6210MM-6 C200H-CN320-EU 49725A 060S2 73231-1321 SDB-50AFFM-SL7A02 49760A 060S2 CS-DSDMDB09MM-050 HDB-26AFFM-SL7A02 30-9503P 30-9522P 73-6220MM-6 1200980058 1200980066 1200980078 1200980052 1200980093 1200980028 1200980021 1200980127 SDB-09AFFM-SL7A02 SDB-15AMMM-SL7A01 BB-LDVYCBL 83421-9286 MLDM2L-21P-6K7-18B KSFD1 MM-2J2-021-SS1-41WN HDB-78AMMM-SL7A05 SDB-37AMMM-SL7A03 SDB-15AFFM-SL7A05 ACC-500-163-R 172-1910