


.033" Round Conductor Flat Cable

30 AWG Stranded, PVC

3849 Series

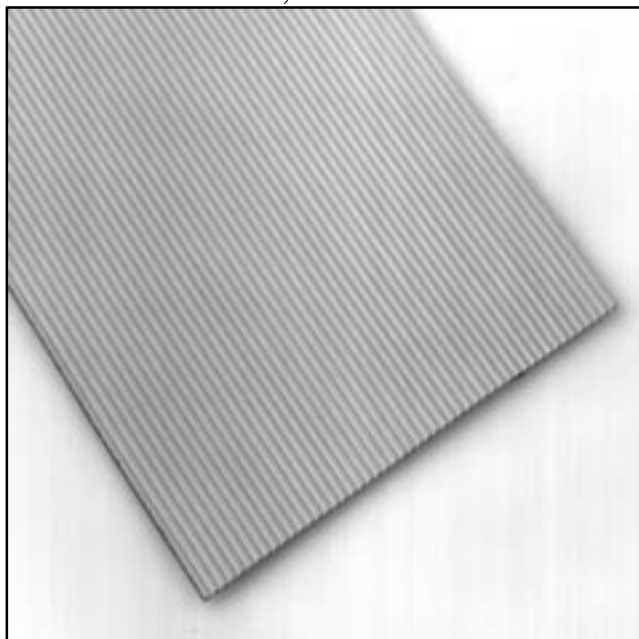

- 30 AWG stranded wire on .0333 inch centers permits termination to all three rows in DIN connectors.
- Stranded wire provides flexibility and extended product life.
- Zippable for branching or discrete termination

Date Modified: February 19, 1999

TS-0573-06
Sheet 1 of 2

124



Physical

Insulation

Material: Polyvinyl Chloride (PVC)
Color: Gray

Marking

Standard: None

CSA Option:  AWM 2651 105C 300V VW1 3M NU  AWM IA 105C 300V FT1
EU <50V

Conductors: 30 AWG 7 X 38 [7 X 0.102] Tinned Stranded Copper

Electrical

Voltage Rating:	USA: 300V	Canada: 300V	EU: <50V
Insulation Resistance:	> 1 X 10 ¹⁰ Ω/10 ft. [3m]		
	Unbalanced	Balanced	
Characteristic Impedance:	89 Ω	144 Ω	
Capacitance:	17.5 pF/ft. [57.4 pF/m]	10.5 pF/ft (34.5 pF/m)	
Inductance:	.14 μH/ft. [0.46 μH/m]	.22 μH/ft (0.72 μH/m)	
Propagation Delay:	1.56 ns/ft. [5.12 ns/m]	1.51 ns/ft (4.95 ns/m)	
Velocity of Propagation:	65%	67%	

Note: Unbalanced is measured between ground-signal-ground conductors. Balanced is measured between signal conductors within a pair.

Environmental

Temperature Rating: -20°C to +105°C
Flammability Rating: USA: VW-1 Canada: FT1

UL File No.: E42769, Style No.: 2651

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000


For technical, sales or ordering information call
800-225-5373

.033" Round Conductor Flat Cable

30 AWG Stranded, PVC

3849 Series

Number of Conductors	3M Part Number	Dimension A	Dimension B
96	3849/96	3.197 ± .020 [81.20]	3.164 ± .015 [80.37]

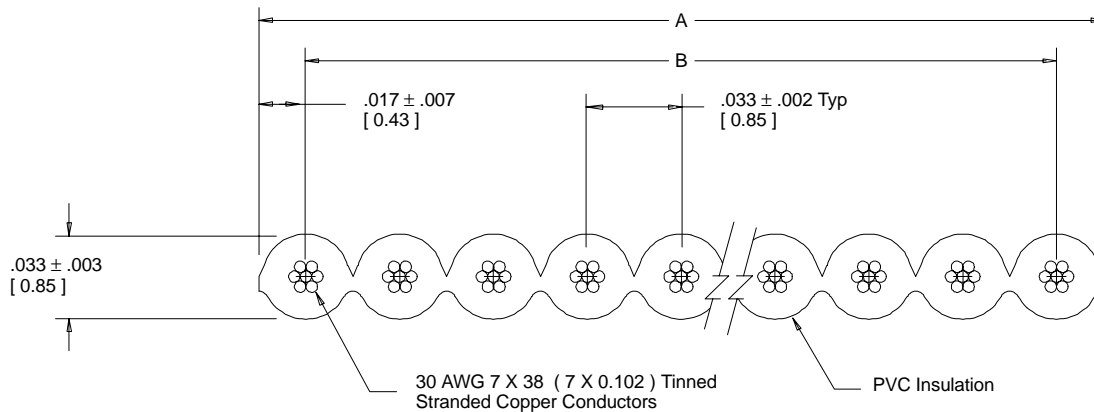


Inch
[mm]

Tolerance Unless Noted			
	.0	.00	.000
Inch	±.1	±.01	±.005

Note: Red marking on one edge of cable designates wire #1.

[] Dimensions for Reference only

Ordering Information

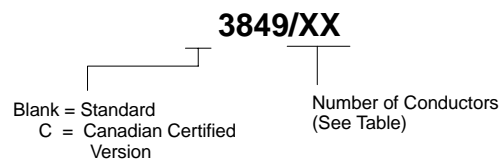

Note: Standard length is 100 ft/roll.

TS-0573-06
Sheet 2 of 2

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ribbon Cables / IDC Cables](#) category:

Click to view products by [3M](#) manufacturer:

Other Similar products are found below :

[FSK-12A Ribbon Cable, 6 Pin, 500mm](#) [AWG28-10G EHV3C EHV4C EHV5C](#) [cab-LVDV-PWR-10-15 FSP-25A Ribbon Cable, 4 Pin, 350mm](#)
[Ribbon Cable, 6 Pin, 300mm](#) [cab-LVDV-DAT-34-15](#) [49635-C62-S2](#) [1-3636-600-5204](#) [92315-1408](#) [100063-0094](#) [100063-0106](#) [100063-0102](#)
[100063-0104](#) [MMSD-02-20C-F-15.00-S-K](#) [100063-0099](#) [100063-0105](#) [100063-0095](#) [100063-0103](#) [100063-0093](#) [100063-0091](#) [2200000068](#)
[100063-0092](#) [100063-0101](#) [100063-0100](#) [100063-0097](#) [TFSDT-08-28-H-15.00-S](#) [S1SD-02-30-GF-09.00-L](#) [MMSD-02-22C-F-15.00-S-K](#)
[S1SS-02-28C-GF-02.00-L](#) [S1SDT-02-28-GF-03.00-L](#) [2-1589735-3](#) [JSM015PP2DCC23N](#) [92301-0283](#) [TCSD-22-D-26.00-01](#) [S1SST-07-30-](#)
[GF-06.00-L](#) [T2SD-20-24-L-07.87-TR-NUS](#) [DS1057-01-44A282R-30.5](#) [FFSD-06-S-17.00-01-N](#) [IDSS-03-D-20.00-T](#) [TCMD-17-S-36.00-01-](#)
[SR](#) [92301-0718](#) [839023](#) [490107670612S](#) [MMSDT-06-20-S-05.5-D-K-LDX](#) [IDD-04-G](#)