



3M™ ROUND CONDUCTOR FLAT, CONTROLLED IMPEDANCE CABLE, 7700 SERIES

.025" 30 AWG SOLID COVERED

PERFORMANCE:	
DIFFERENTIAL IMPEDANCE:	95 ± 5 Ohms
DIFFERENTIAL INSERTION LOSS:	< 3 dB/m AT 2.5 GHz TYP.
INSULATION RESISTANCE:	>1 × 10 ⁹ Ohms AT 500 VDC
UL VOLTAGE RATING:	30V _{AC}
UL FLAMMABILITY RATING:	HORIZONTAL FLAME FOR INTERNAL WIRING
UL WITHSTANDING VOLTAGE:	750VAC _{RMS} AT SEA LEVEL
UL TEMPERATURE RATING:	+80° C

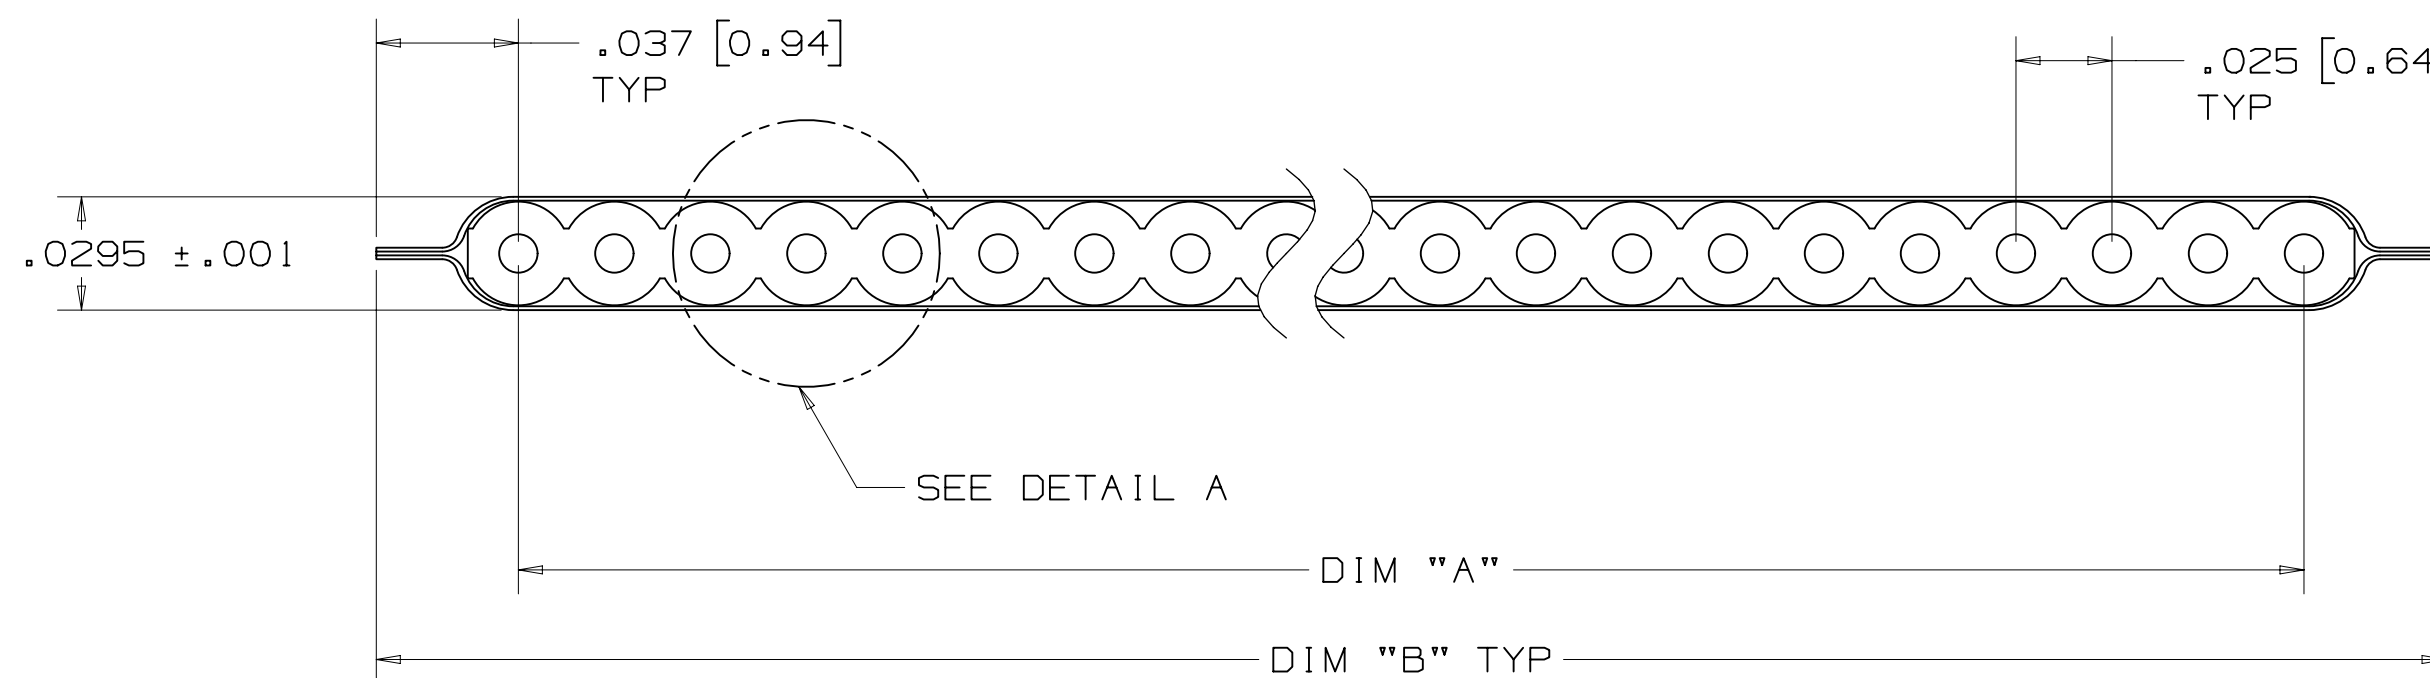

NUMBER OF CONDUCTORS	DIM. "A"	DIM. "B" ± .010
10	.225 ± .006 [5.72 ± 0.15]	0.300 [7.62]
14	.325 ± .006 [8.26 ± 0.15]	0.400 [10.16]
16	.375 ± .006 [9.53 ± 0.15]	0.450 [11.43]
20	.475 ± .006 [12.07 ± 0.15]	0.550 [13.97]
30	.725 ± .009 [18.42 ± 0.23]	0.800 [20.32]
50	1.225 ± .009 [31.12 ± 0.23]	1.300 [33.02]

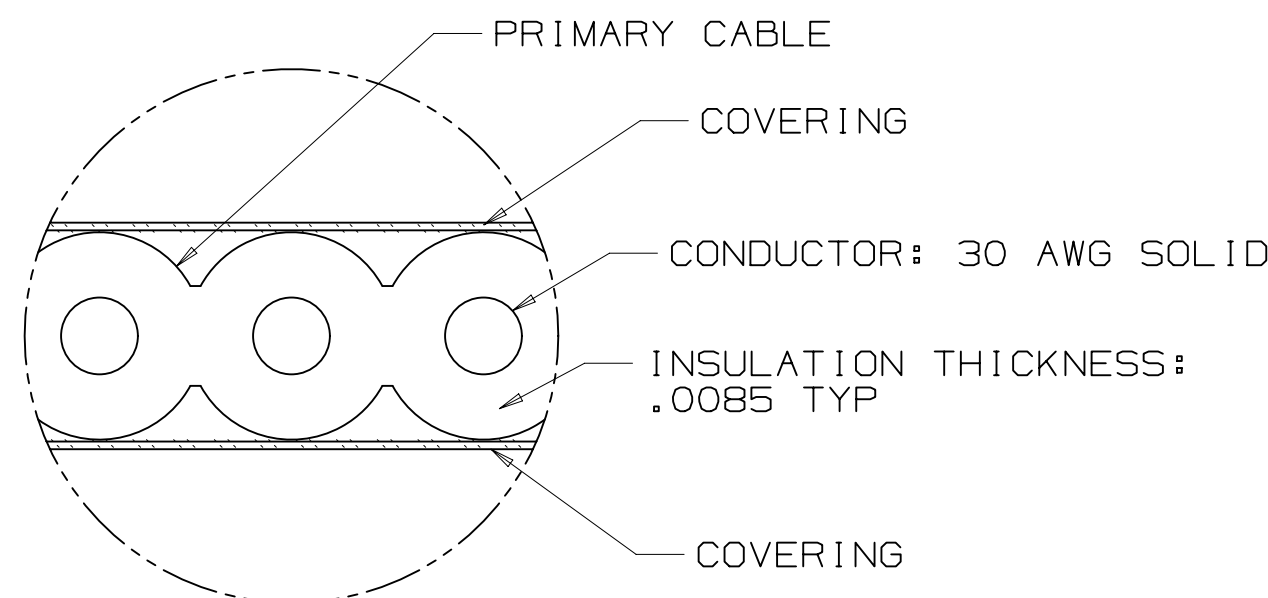

DETAIL A
SCALE 40:1

DIMENSIONS: INCHES [MM]
[MM] IS REF ONLY

ORDERING INFORMATION

7700/XX XX
 PRIMARY CABLE
 0: 30 AWG SOLID 0.025" PITCH
 BLANK: STANDARD
 SF: SPLICE FREE
 NUMBER OF CONDUCTORS:
 (SEE TABLE 1)

3M ELECTRONICS MATERIALS SOLUTIONS DIVISION
 INTERCONNECT SOLUTIONS
<http://www.3m.com/Interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
 FOR TECHNICAL, SALES OR ORDERING
 INFORMATION CALL 800-225-5373



UL FILE NO: E42769
 STYLE NO: 22172

NOTES

- MATERIALS:
 CONDUCTORS: 30 AWG SOLID TIN PLATED COPPER
 INSULATION: POLYOLEFIN
 COVERING: ALUMINUM FOIL & POLYESTER
- EXAMPLE OF A DIFFERENTIAL PAIR PINOUT USING 3M™ RIBBON CABLE SOCKET, .05 X .05 PITCH, 451 SERIES IDC CONNECTOR, P/N: 45114-0X00-XX: GGSSGGSSGGSSGG
 NOTE: EDGE WIRES ARE DESIGNATED AS GROUNDS.
- CABLE PRINT CODE:
 77XX/XX 30 AWG TIN RUN# ID#
- BEFORE TERMINATING TO AN IDC CONNECTOR, COVERING MUST BE REMOVED TO PREVENT IDC SHORTING TO FOIL.
- AVAILABLE IN STANDARD 100 FT. PLEASE SPECIFY WHEN ORDERING. PLEASE CONTACT YOUR LOCAL 3M SALES REPRESENTATIVE FOR ADDITIONAL CONDUCTOR COUNTS.
- THE SURFACE OF THE RIBBON CABLE HAS A METALLIC APPEARANCE BUT IS NOT CONDUCTIVE. THERE IS A TRANSLUCENT POLYESTER OUTER LAYER OVER AN ALUMINUM FOIL LAYER, WHICH GIVES THIS APPEARANCE.
- THE CABLE CONSTRUCTION HAS A THIN CONDUCTIVE ALUMINUM LAYER AT EACH EDGE. USER SHOULD EVALUATE ITS USE IN THEIR APPLICATION AND, IF NECESSARY, INSULATING TAPE MAY BE APPLIED TO COVER THE ALUMINUM LAYER, AS USER DEEMS APPROPRIATE.
- REGULATORY INFORMATION: ROHS COMPLIANT. VISIT WWW.3M.COM/REGS FOR COMPLIANCE INFORMATION.

REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
D	80113	AUG 30, 2018 REMOVED 100pos AND CHANGED FLAME RATING FROM FT2	SBCO	JV
C	74293	JUN 14, 2017 PRODUCT LAUNCH	SBC	FR
B	72021	FEB 28, 2017 UPDATED TO NEW DESIGN	SBC	JV
A	69905	SEP 20, 2016 WORK REQUEST 12281 INITIAL RELEASE	LDS	SBC

ACCESS CODES	DESIGN REFERENCE	NEXT ASSEMBLY
DRFT L SCHMIDT	DATE AUG 23, 2016	MFG DATE
CHKD S CLATANOFF	DATE SEP 13, 2016	APPVL DATE
DIVISION	DIVISION CODE	
DO NOT SCALE DRAWING	SCALE 20/1	TOLERANCES EXCEPT AS NOTED
THIRD ANGLE PROJECTION	INCHES .0 ± .1 .00 ± .02 .000 ± .005 .0000 ± .0002	
INTERPRET PER ASME Y14.5 - 2009	MILLIMETERS 0 ± .0 ± .00 ±	
MAX SURFACE ROUGHNESS 125	ALL SURFACES MARKED ONLY	
ANGLES ± 1°		

© 3M COPYRIGHT 2018
 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.

3M 3M Center St. Paul, MN 55144

TITLE
 ROUND CONDUCTOR FLAT,
 CNTRL IMPEDANCE 7700
 SERIES .025 CABLE

CAGE NUMBER SIZE DRAWING NO. REV.
 C 78-5100-2667-3 D

MODEL DET. LISTS YES NO SHT 1 OF 2

78-5100-2667-3
 DRAWING NUMBER

Imaged: Central Standard Time 10/15/2018 -- UTC Offset (hrs) 6

3M™ ROUND CONDUCTOR FLAT, CONTROLLED IMPEDANCE CABLE, 7700 SERIES

.025" 30 AWG SOLID COVERED

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
D	80113	AUG 30, 2018 REMOVED 100pos AND CHANGED FLAME RATING FROM FT2	SBCO	JV
C	74293	JUN 14, 2017 PRODUCT LAUNCH	SBC	FR
B	72021	FEB 28, 2017 UPDATED TO NEW DESIGN	SBC	JV
A	69905	SEP 20, 2016 WORK REQUEST 12281 INITIAL RELEASE	LDS	SBC

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ACCESS CODES				DRFT	L SCHMIDT	DATE	AUG 23, 2016	MFG	DATE
				CHKD	S CLATANOFF	DATE	SEP 13, 2016	APPVL	DATE
DIVISION		DIVISION CODE		3M 3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2018 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
DO NOT SCALE DRAWING	SCALE 1/1	TOLERANCES EXCEPT AS NOTED		TITLE ROUND CONDUCTOR FLAT, CNTRL IMPEDANCE 7700 SERIES .025 CABLE					
THIRD ANGLE PROJECTION		INCHES .0 ± .1 .00 ± .02 .000 ± .005 .0000 ± .0002		CAGE NUMBER C 78-5100-2667-3					
INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS 0 ± .0 ± .00 ± .000 ±		DRAWING NO. 78-5100-2667-3					
MAX SURFACE ROUGHNESS 125 <input type="checkbox"/> ALL SURFACES <input checked="" type="checkbox"/> MARKED ONLY		ANGLES ±1°		REV. D					
				MODEL DET. <input type="checkbox"/> LISTS <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO					
				SHT 2 OF 2					

3M ELECTRONICS MATERIALS SOLUTIONS DIVISION
INTERCONNECT SOLUTIONS
<http://www.3m.com/Interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

78-5100-2667-3
DRAWING NUMBER

UTC Offset (hrs) 6

Imaged: Central Standard Time 10/15/2018

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ribbon Cables / IDC Cables](#) category:

Click to view products by [3M](#) manufacturer:

Other Similar products are found below :

[FSK-12A](#) [AWG28-10G](#) [EHJ3C](#) [EHJ4C](#) [FSP-25A](#) [cab-LVDV-DAT-34-15](#) [49635-C62-S2](#) [1-3636-600-5204](#) [92315-1408](#) [426171120-3](#) [2-1589735-3](#) [JSM015PP2DCC23N](#) [92301-0283](#) [ACL-eSSI-2](#) [92301-0718](#) [MMSDT-06-20-S-05.5-D-K-LDX](#) [IDD-04-G](#) [NM-2J2-051-PS1-JJAB](#) [1700/26SF \(100FT\)](#) [1700/34SF \(100FT\)](#) [3801/09 \(100FT\)](#) [S30109](#) [96053-0000-00-0](#) [NM-2J2-065-SS1-JJ00-272](#) [7940098862](#) [IDMD-13-D-07.87](#) [166466](#) [HQCD-030-40.00-TTL-SBL-1-N](#) [HDR-201768-01-PCIEC](#) [DS1052-082B2NA201501](#) [DS1052-102B2NA201501](#) [DS1052-122B2MA201501](#) [DS1052-122B2NA201501](#) [DS1052-262B2NA201501](#) [DS1052-302B2MA201501](#) [DS1052-302B2MA203001](#) [DS1052-302B2MA206001](#) [DS1052-302B2NA201501](#) [DS1052-302B2NA203001](#) [DS1052-342B2MA201501](#) [DS1052-342B2MA203001](#) [DS1052-342B2NA201501](#) [DS1052-342B2NA203001](#) [DS1052-342B2NA206001](#) [DS1052-402B2MA201501](#) [DS1052-402B2MA203001](#) [DS1052-402B2MA206001](#) [DS1052-402B2NA201501](#) [DS1052-402B2NA203001](#) [DS1052-502B2MA201501](#)