



3M Abrasives Bestseller Product Catalogue

Contents

| | | | | | |
|--|-----------|--|-----------|---------------------------------------|-----------|
| 1. 3M Advanced Technologies | 3 | 5. File Belt Sander | 40 | 9. Random Orbital Sander | 70 |
| 3M Precision-Shaped Grain | 4 | About the Tool | 41 | About the Tool | 71 |
| Non-Woven Technology | 5 | Application Guide | 42 | Where is it Used? | 72 |
| Micro-Replicated Technology | 6 | Products | 43 | Tool Features | 73 |
| <hr/> | | | | | |
| 2. Applications | 7 | 6. Linear Finishing Machine | 44 | Application Guide | 74 |
| Typical abrasive process | 8 | About the Tool | 45 | Factors Affecting the Perfect Finish | 75 |
| Product symbols | 9 | Application Guide | 46 | Product Information | 76 |
| Selecting your tool | 10 | Products | 47 | Accessory Information | 84 |
| <hr/> | | | | | |
| 3. Top Technical Tips and Questions | 11 | 7. Backstand Machine | 50 | 10. Tool and Abrasive Safety | 86 |
| Top Technical Tips | 12 | Where is it Used? | 51 | Abrasive Hazards | 87 |
| The Perfect Ten Blueprinting Questions | 13 | Application Guide | 52 | Using Abrasives Safely | 88 |
| Top Ten Scotch-Brite™ Blueprinting Questions | 14 | Products | 54 | Using Abrasives | 89 |
| <hr/> | | | | | |
| 4. Right Angle Grinder | 15 | 8. Abrasive Belts | 55 | Links to Further Reading | 92 |
| About the Tool | 16 | Factors Affecting Performance and Finish | 56 | 11. Product Information Tables | |
| Where is it Used? | 18 | 3M Abrasives and Robotics | 58 | Right Angle Grinder | 93 |
| Application Guide | 19 | Product Information | 59 | Abrasive Belts | 109 |
| Factors Affecting the Perfect Finish | 23 | File Belt Accessory Information | 69 | Random Orbital Sander | 120 |
| Product Information | 24 | | | Roloc™ Products | 136 |
| Accessory Information | 37 | | | | |

3M Advanced Technologies




3M Precision-Shaped Grain

Almost all of our entire coated abrasive range now uses the proprietary 3M Precision-Shaped Grain (PSG) – precisely shaped, uniformly sized and vertically orientated triangles of ceramic aluminium oxide.

These self-sharpening triangles are designed to fracture as they wear, continuously forming new, super sharp points and edges that slice cleanly through the metal like a knife, instead of gouging or ploughing, like traditional crushed grain minerals.

This prevents heat from building up in the workpiece – reducing heat related stress cracks and discolouration. Additionally, because the abrasive itself stays cooler and sharper, it lasts many times longer than conventional ceramic grains, increasing efficiency and productivity.

3M's Precision-Shaped Grain technology can help to reduce exposure to hand-arm vibration (HAVS), airborne particles and noise hazards in the workplace.*

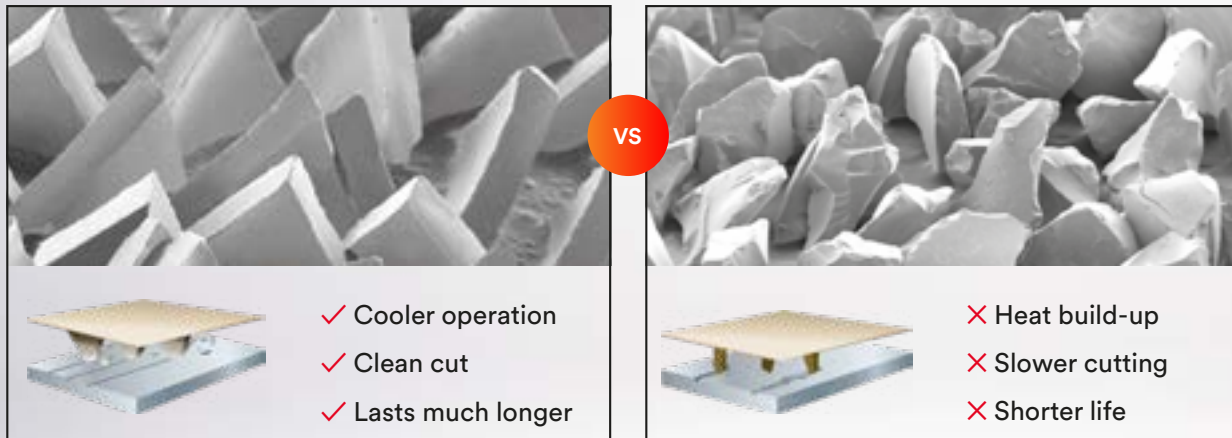

The self-sharpening abrasive slices through the metal with less pressure, cutting faster than conventional abrasives, helping to minimise the time spent holding the vibrating tool. The swarf is larger and longer, staying airborne for less time, helping to reduce the exposure to airborne hazards. Noise exposure can also be reduced by completing the job quicker and using abrasives that create less noise.

*According to Independent testing by VITO and the Fraunhofer Institute



Cuts faster



Increased productivity



Works harder



Increased safety



Minimise hand-arm vibration



Reduce airborne particles



Create less noise

Non-Woven Technology



The Scotch-Brite™ brand containing surface conditioning products includes a wide variety of non-woven synthetic fibre webs suitable for a wide range of applications. These products are well suited for cleaning, blending, deburring, finishing and polishing, which improves surfaces without significantly changing the shape or dimension of the workpiece. Scotch-Brite™ abrasives run cool, and resist loading due to their open web construction. This reduces the risk of part discolouration and warping and extends the life of the product.

The conformability of Scotch-Brite™ products means they follow the surface of the substrate more easily than coated abrasives, so they can finish and blend scratches more quickly – without altering the surface geometry.

The perfect finish starts with Scotch-Brite™


Performance. Durability. Reliability. Excellence. We don't release a surface conditioning product until we can guarantee it delivers all four. Because at Scotch-Brite™, our standards are as high as yours. After all, if you don't compromise on quality, why should we?

Scotch-Brite™ Non-Woven Technology explained


Our unique Non-Woven Web binds together synthetic fibres and abrasive particles to create a conformable, three-dimensional material. Its open structure reduces the risk of warping or discolouring the part, resists loading, improves finish and prolongs the product's life.

What's more, our Non-Woven Web is engineered to continually expose fresh abrasive to the work surface, for a consistent, smoother finish – without the risk of overworking the part and disturbing critical tolerances.

3D open web

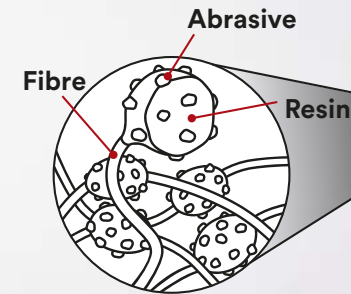

Spring action

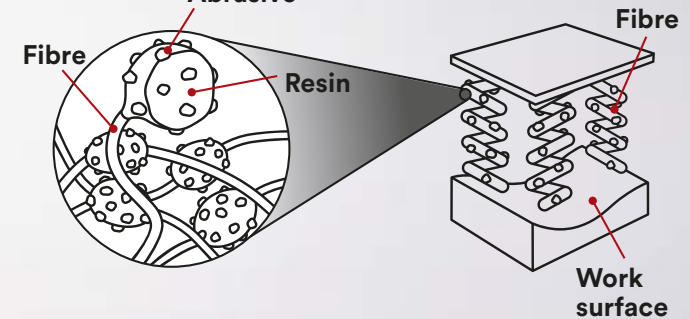

What makes Scotch-Brite™ the best you can buy?

- ▶ A tough, non-woven nylon web impregnated with resin and mineral throughout its structure
- ▶ Spring-like action produces a smooth, burr-free surface
- ▶ Uniform, consistent results with no undercutting
- ▶ Suitable for deburring, finishing, cleaning and small weld removal applications
- ▶ Easy to use, less rework, fewer rejects



Micro-Replicated Technology


Trizact™

Featuring precisely-shaped, three-dimensional abrasive structures, our 3M™ Trizact™ Abrasives are ideal for work where consistent, refined finishes are essential. 3M microreplication technology makes Trizact™ more consistent and uniform than any conventional abrasive.

Trizact™ also runs cooler vs. conventional abrasives – excellent for grinding, and for working with substrates that can easily discolour. Micron-graded mineral abrasives can help you achieve fine finishes even to tough surfaces like stainless steel, chromium, nickel and cobalt-based materials. What's more, 3M™ Trizact™ Abrasives continually expose fresh cutting surfaces as they wear. The results are unmistakable: higher productivity, longer abrasive life, lower reject rates, and more consistent and uniformly smooth and refined finishes.

Why 3M™ Trizact™ Abrasives?

No matter what the challenge in finishing work – more consistent results, lower material costs, faster production – our selection of 3M™ Trizact™ abrasive sheets, discs, and belts can refine your entire operation.

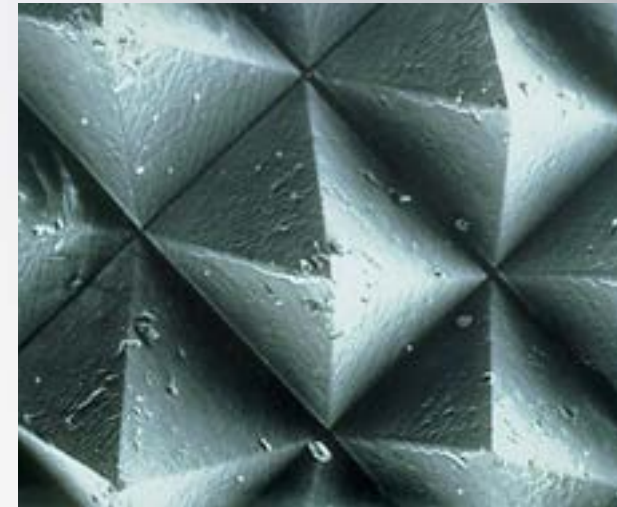

Consistency from start to finish

3M™ Trizact™ Abrasives are the only industrial abrasives to feature 3M microreplication technology: precisely-shaped, three-dimensional mineral structures distributed uniformly over the abrasive backing.

This evenly-spaced configuration results in truly consistent performance – disc after disc, belt after belt, part after part and job after job – that you won't get from any non-microreplicated abrasive.


Stays sharper for longer

Conventional abrasives start out sharp, but dull quickly during use.

As the mineral structures in 3M™ Trizact™ Abrasives wear, fresh, sharp mineral is exposed, keeping them sharper for longer periods vs. conventional abrasives. This results in a faster cut and longer abrasive life.



Conventional grain

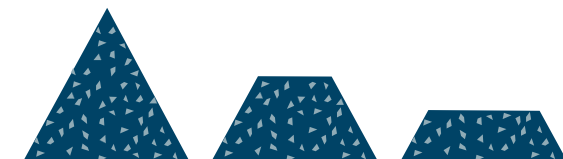


Trizact™ micro-replicated

Applications



Typical Abrasive Process

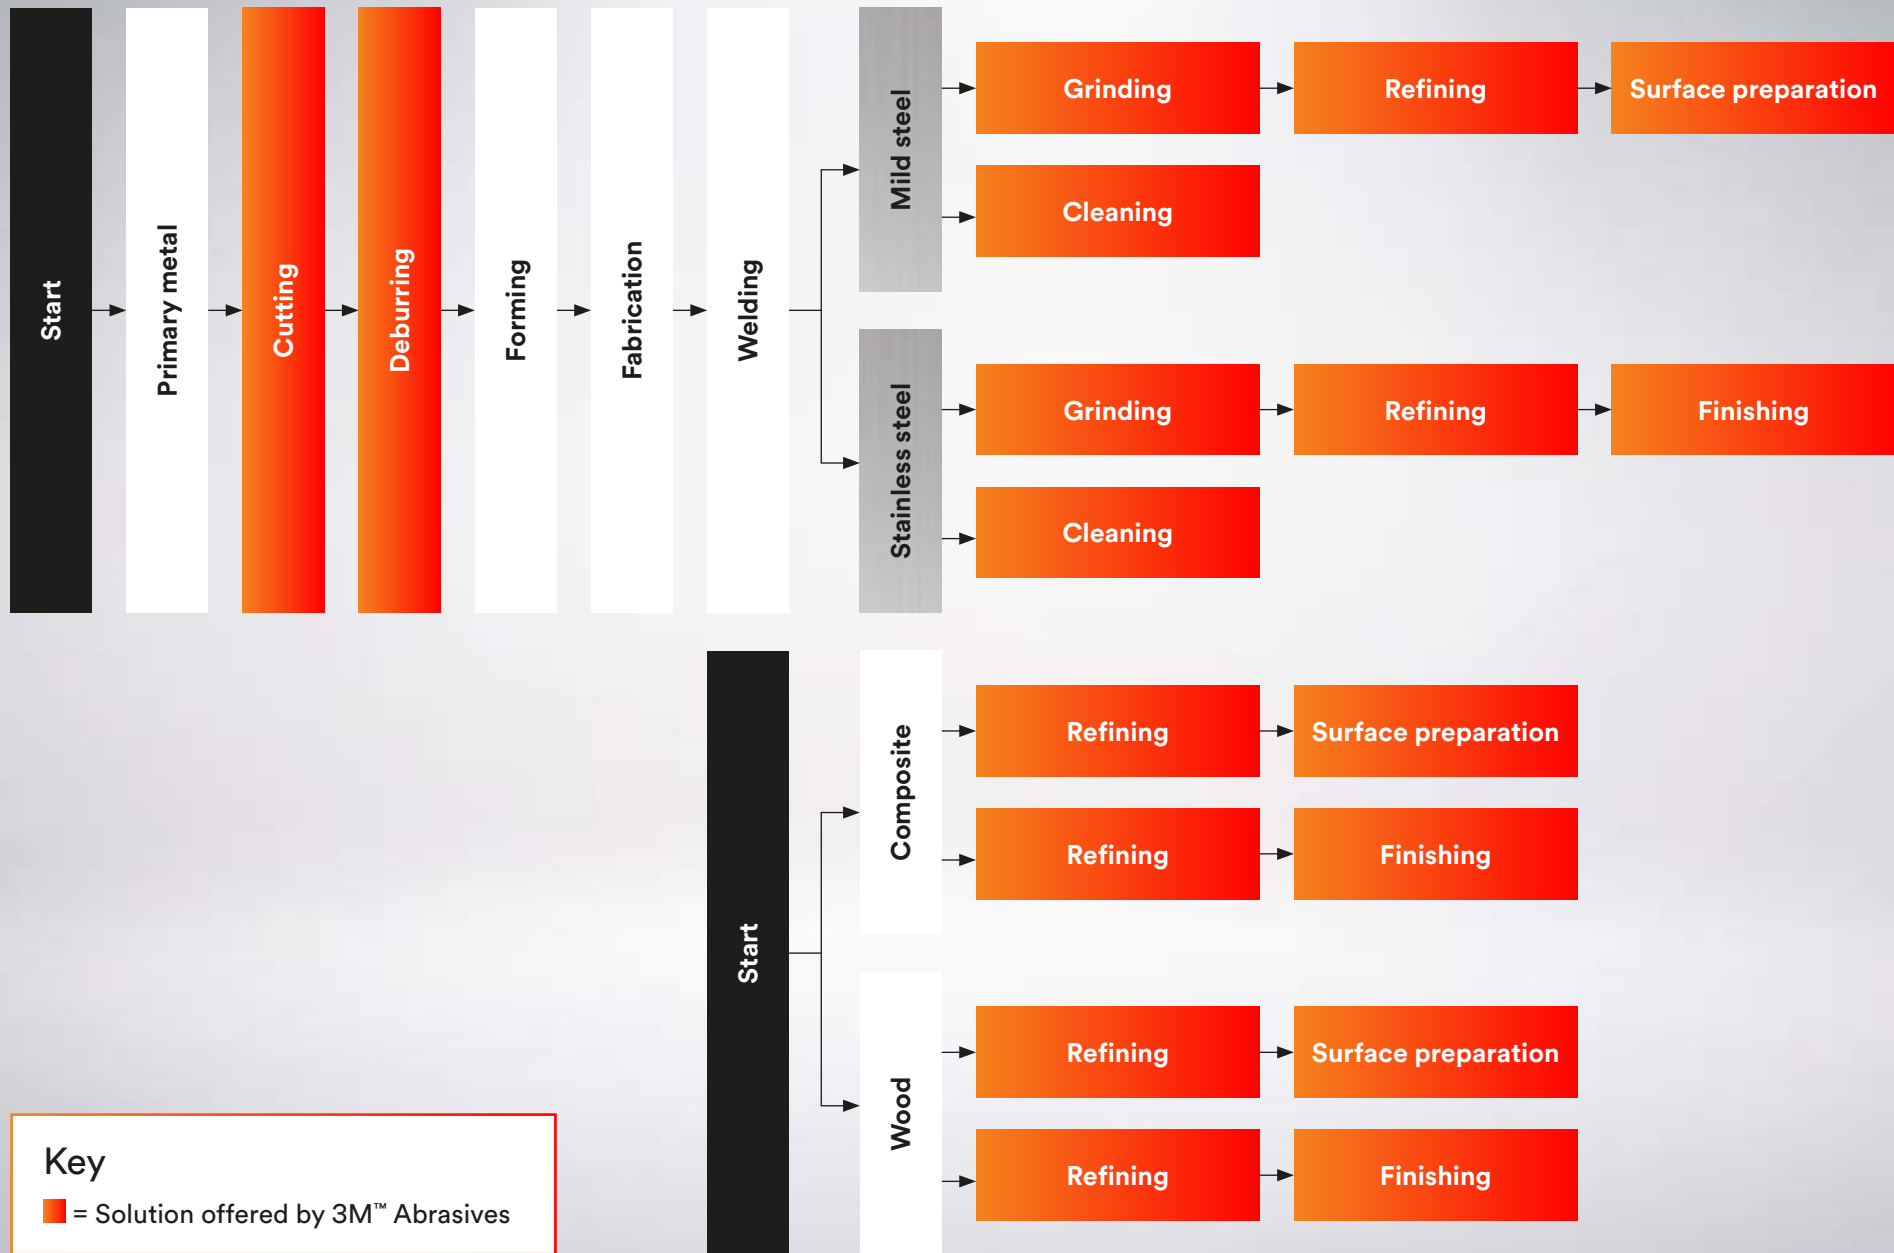

Product Symbols

Substrate



Stainless steel




Mild steel



Aluminium



Preparation for painting,
sanding, finishing for fillers,
primers and paints



Composite and
plastic materials



Wood

Abrasive grain type



3M Precision-Shaped Grain
(Ceramic)



Alumina zirconia



Aluminium oxide



Silicon carbide

PPE symbols



Wear appropriate
respiratory protection



Wear appropriate
safety glasses



Wear appropriate
hearing protection



Wear gloves that protect
from sparks








Wear an apron designed
to protect from sparks



Wear protective visor in
place of safety glasses

Selecting Your Tool

| | | Tool | | | | |
|-------------|---------------------------------|---|--|---|---|---|
| | | Right Angle Grinder | File Belt Sander | Linear Finishing Machine | Backstand Machine | Random Orbital Sander |
| | |  |  |  |  |  |
| Application | Cutting | ✓ | | | | |
| | Deburring | ✓ | ✓ | | ✓ | |
| | Weld grinding and stock removal | ✓ | ✓ | | ✓ | |
| | Edge preparation/bevelling | ✓ | ✓ | | ✓ | |
| | Refining | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Cleaning | ✓ | ✓ | ✓ | ✓ | |
| | Surface preparation | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Blending/satin finishing | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Fine finishing/pre-polish | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Paint denibbing | | | | | ✓ |

Top technical Tips and Questions



Top Technical Tips

Given the ever growing number of tools and consumables on the market, and the variety of work that industry demands, the process of selecting the right solution is not a simple one, with many criteria needing to be considered.

Achieving the right finish

Metalwork finishing usually demands either a cosmetic or a measured finish. In cosmetic applications, it is generally enough for the final product to have a good aesthetic appearance unless further processes such as painting, powder coating or lacquering are to take place, in which case the abrasive must deliver a surface which is sufficiently receptive to these coatings.

A measured finish will require the ability to demonstrate that the finished workpiece is within a pre-agreed tolerance. These applications generally require the finest abrasives at the end of the process, and for that reason, when specifying, it is often easier to 'start with the finish'.

TOP TIPS



- ▶ Take time to understand the application and surface finish the customer wants
- ▶ Check their machinery is up to the task, optimising pressure, speed and power
- ▶ If the factors are right, make sure you supply the best product to carry out the application
- ▶ If not, can they be changed or look to recommend a product that will suit the parameters you have to work with

The role of equipment

Perhaps the largest issue affecting abrasive consumables is the type and performance of the equipment with which they will be used. Even the best quality abrasives, if not used in the right way on the right types of machinery, are unlikely to deliver the required results.

When it comes to power, in almost every case, more is better.

Not only will each work piece be processed more quickly, but the greater speed means less heat and less potential for damage.

The force being applied by the machinery must also be considered:

- ▶ A backing pad or contact wheel which is too soft will not maximise the efficiency of the abrasive
- ▶ A ribbed high-performance pad or a grooved hard contact wheel will deliver the required impact pressure to maximise the efficiency of the abrasive without adding to vibration

For best results abrasives should be used at the correct tool speeds which may not always be the maximum operating speed (MOS). Running at speeds higher than the MOS could lead to abrasive failure and the compromise on operator safety.



Understand product value and performance

Life, cost and productivity need to be factored in to assess the true value of an abrasive product.

To calculate this, we need to work out both the life of the product and the time it takes to complete the process (the cut rate).

For example, it can be all too easy to dismiss an abrasive if it costs twice the price of a competitive product, but if it can process three times as many parts and takes less time to complete the application, the investment is a sound one.

The Perfect Ten Blueprinting Questions

The Perfect 10 Questions



1. What do you manufacture on this site?

2. Which metals do you typically work with? (mild steel, stainless steel etc)

3. What process steps are involved in the manufacturing of your product/s?
 - ▶ What is your final surface finish requirement? (e.g. measured, cosmetic)
 - ▶ What is the final process step? (paint, powder coat)

4. What machines do you use?
 - ▶ Air or electric?
 - ▶ Tools speeds?
 - ▶ Factors affecting belt machines – contact wheel hardness?

5. What sequence of abrasives do you currently use? (grades, brand etc)


6. What is the approx. weekly, monthly or annual usage of the abrasives involved?

7. Which areas in the current process cause issues that could be improved?
 - ▶ Production costs?
 - ▶ Product quality?
 - ▶ Reduction of rejects?
 - ▶ Productivity (volumes, process times)?
 - ▶ Operator welfare (H&S, dust, noise, vibration and injury)?

8. Are there any constraints with the work piece or in the process that prevent these improvements being made?
 - ▶ Product weight, size, shape, specification?
 - ▶ Floor space, operator skillset?

9. Have you thought about automation?

10. Can you measure value/performance?

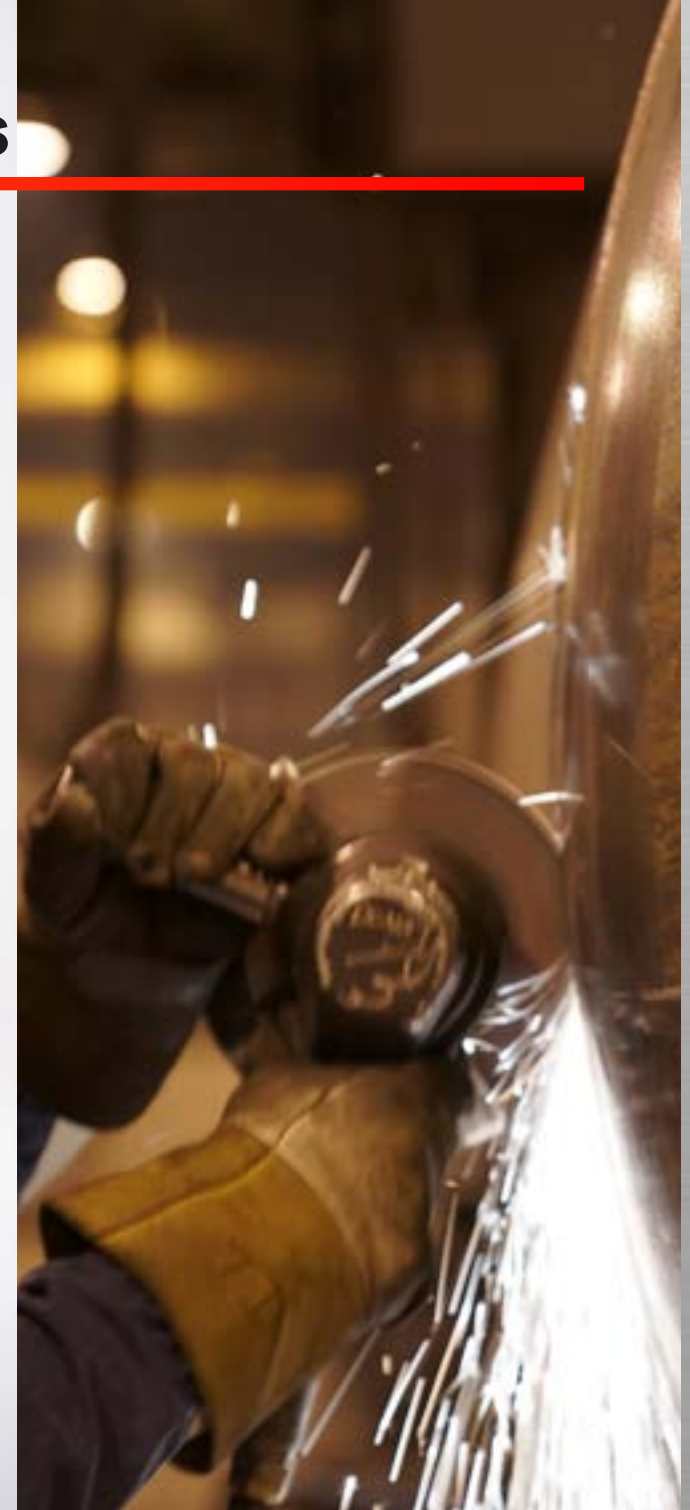

Top Ten Scotch-Brite™ Blueprinting Questions



1. What do you manufacture on this site?

2. Which metals do you typically work with?
(mild steel, stainless steel etc)

3. What process steps are involved in the manufacturing of your product/s?

- ▶ What is your final surface finish requirement? (e.g. measured, cosmetic)
-

4. What machines do you use?
(please also state whether air or electric)

- ▶ Angle grinder
- ▶ Die grinder
- ▶ Random orbital sander
- ▶ Small disc sander
- ▶ File belt sander
- ▶ Backstand machine
- ▶ Bench motor
- ▶ Inline sander/match and finish type sander
- ▶ Other, please specify...

5. Do you carry out any of the following applications? If so what abrasives do you currently use to carry out these applications?

- ▶ Deburring
 - ▶ Surface preparation
 - ▶ Refining
 - ▶ Blending
 - ▶ Finishing
 - ▶ Cleaning
-

6. Which areas in your current process cause issues that could be improved?

Production cost

- ▶ Long life can reduce consumable cost
- ▶ Better finish may allow 2 steps to be reduced to 1 step
- ▶ Controlled cut means it will not alter part geometry so less skilled operators can be used (lower wage cost)

Product quality

- ▶ Consistent finish means same result every time
- ▶ Better finish improves product appearance

Reduction of rejects

- ▶ Controlled cut means it will not alter part geometry so reduces the possibility of overworking the part
- ▶ Consistent finish means same result every time

Productivity (lead-times, volume)

- ▶ Better finish may allow 2 steps to be reduced to 1 step
- ▶ Controlled cut means it can be used without danger of damaging the part so operators do not need to take same level of care leading to faster production time
- ▶ Conformability makes it easier to follow uneven surfaces so produces faster results

Operator welfare (health and safety, ease of use)

- ▶ Synthetic nylon web construction means they do not produce flying particles that could cause injury
- ▶ Softer conformable nature mean they run more quietly and are gentler to use so reducing operators' exposure to noise and vibration
- ▶ Less aggressive action means there is less chance of abrasion related injuries

Right Angle Grinder



Right Angle Grinder



Right Angle Grinders are commonly used for removing excess material from a work piece. They are widely used in metalworking due to their versatile access and usage.

In some cases, the entire mild steel process applications can be done with a Right Angle Grinder – from cut to smooth finish.

There are a large variety of angle grinders to choose from when trying to find the right one for the job. The most important factors in choosing the right grinder are the disc size and how powerful the motor is. Other factors include power source (pneumatic or electric), RPM, and arbor size. Generally disc size and power increase together. Electric grinders are more commonly used for larger, heavy duty jobs.

Pneumatic grinders are generally used for lighter duty jobs where more precision is required. This is likely because pneumatic grinders can be small and light yet remain powerful, as they do not contain heavy copper motor windings, while it is harder for an electric grinder to maintain adequate power with smaller size.



[View product information tables](#)

3M™ Electric Right Angle Grinders

COMING SOON to the UK

Get the system advantage.

This powerful tool features superior performance and worldclass ergonomic design. It's designed with robust components for durability and reliability in the harshest industrial conditions.

The new electric grinder is available in 115mm and 125mm and fixed or variable speed. Designed with robust components, these grinders are built for durability in the harshest industrial conditions. They're the powerful and long-lasting tools you need to get more done.

- ▶ 1900 W power
- ▶ Available in fixed or variable speeds
- ▶ World class ergonomic design
- ▶ Robust design and components provide durability in industrial conditions
- ▶ Restart protection
- ▶ Adjustable guard
- ▶ Accessories for maximum functionality and flexibility
- ▶ Direct cooling for a long service life
- ▶ Overload protection
- ▶ Kickback control



[View product information tables](#)

Right Angle Grinder



Where is it used?

- ▶ Cutting
- ▶ Blending
- ▶ Deburring
- ▶ Surface preparation
- ▶ Bevelling
- ▶ Cleaning paint/rust/mill scale
- ▶ Weld grinding and stock removal

What segment is it used in?

- ▶ Metal fabrication
- ▶ Industrial equipment
- ▶ Transportation
- ▶ Machinery and equipment
- ▶ General metal working

Which portfolio is best for your customer?

Choose 3M™ Cubitron™ II Abrasives for their legendary speed and long life, or Advanced Series discs and wheels for value-priced performance. Scotch-Brite™ Abrasives deliver consistent, reproducible results, making it easy to ensure quality finishes.

What's most important?

Choose this family of 3M abrasives

Speed and long life – to improve productivity and lower overall production costs

Premium Series – 3M™ Cubitron™ II Abrasives

Value-priced performance – to minimise abrasive spend while getting the job done efficiently

Advanced Series – 3M™ Abrasives

Which right angle product is best for your customer?

These general guidelines are a good starting point. Refer to the rest of the field guide for recommended products in specific applications.

What's most important?

Choose this type of abrasive

Speed

Fibre discs

Life time.

Depressed Centre Grinding Wheels

Ease of use

Flap discs

Did you know? Although grinding wheels have a longer lifetime, fibre discs remove stock at a faster rate and will remove more material in their lifetime.

Right Angle Grinder



Premium application guide – top performance

| Application | Metal | Option 1 | Option 2 | Option 3 |
|------------------------------------|--------------------|---|---|---|
| Cutting | Mild/carbon steel | 3M™ Cubitron™ II Cut-Off Wheel | 3M™ Silver Cut-Off Wheel | 3M™ Cubitron™ II Cut and Grind Wheel |
| | Stainless steel | | | |
| Edge rounding/ radiussing | Mild/carbon steel | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | Scotch-Brite™ Surface Conditioning Disc SE-DH (edge durability) | Scotch-Brite™ Surface Conditioning Disc SC-DH |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Deburring | Mild/carbon steel | Scotch-Brite™ Light Grinding and Blending Disc GB-DH | Scotch-Brite™ Deburr and Finish PRO Unitized Disc DP-UD | Scotch-Brite™ Bristle Brush |
| | Stainless steel | Scotch-Brite™ Deburr and Finish PRO Unitized Disc DP-UD | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | |
| | Non ferrous metals | | | |
| Grinding/weld preparation | Mild/carbon steel | 3M™ Cubitron™ II Fibre Disc 982CX PRO 36+ | 3M™ Cubitron™ II Depressed Center Grinding Wheel | 3M™ Cubitron™ II Flexible Grinding Wheel |
| | Stainless steel | 3M™ Cubitron™ II Fibre Disc 987C 36+ | 3M™ Cubitron™ II Flap Disc 969F 40+ | |
| | Non ferrous metals | | 3M™ Cubitron™ II Flap Disc 969F 40+ | |
| Notching/gauging | Mild/carbon steel | 3M™ Cubitron™ II Cut and Grind Wheel | 3M Silver Cut and Grind Wheel | |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Weld grinding and stock removal | Mild/carbon steel | 3M™ Cubitron™ II Fibre Disc 982CX PRO 36+, 982C 60+ | 3M™ Cubitron™ II Depressed Centre Grinding Wheel | 3M™ Cubitron™ II Flap Disc 969F 40+ |
| | Stainless steel | 3M™ Cubitron™ II Fibre Disc 987C 36+ or 60+ | Scotch-Brite™ Surface Conditioning Disc PN-DH | |
| | Non ferrous metals | 3M™ Cubitron™ II Fibre Disc 987C 36+ or 60+ | 3M™ Cubitron™ II Depressed Center Grinding Wheel | |
| Cleaning | Mild/carbon steel | Scotch-Brite™ Clean and Strip XT PRO Disc XO-RD | Scotch-Brite™ Bristle | Scotch-Brite™ Clean and Strip XT PRO Extra Cut Disc |
| | Stainless steel | | | |
| | Non ferrous metals | | | |

Continued...

[View product information tables](#)

Right Angle Grinder



Premium application guide – top performance (Continued)

| Application | Metal | Option 1 | Option 2 | Option 3 |
|---------------------|--------------------|---|---|--|
| Refining | Mild/carbon steel | 3M™ Cubitron™ II Fibre Disc 982C 60+ or 80+ | Scotch-Brite™ Light Grinding and Blending Disc GB-DH | 3M™ Cubitron™ II Flap Disc 969F 60+ 80+ 120+ 3M™ Cubitron™ II Hookit™ 947A 120+ |
| | Stainless steel | 3M™ Cubitron™ II Fibre Disc 987C 60+ or 80+ | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | |
| | Non ferrous metals | | | |
| Blending | Mild/carbon steel | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | Scotch-Brite™ Light Grinding and Blending Disc GB-DH | 3M™ Cubitron™ II Flap Disc 967A |
| | Stainless steel | | | |
| | Soft metals | | | |
| Surface preparation | Mild/carbon steel | Scotch-Brite™ Light Grinding and Blending Disc GB-DH | Scotch-Brite™ Clean and Strip XT PRO Disc | 3M™ Cubitron™ II Flap Disc 967A |
| | Stainless steel | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | | |
| | Non ferrous metals | Scotch-Brite™ Surface Conditioning Disc SC-DH | | |
| Fine finishing | Mild/carbon steel | Scotch-Brite™ Deburr and Finish PRO Unitized Disc DP-UD | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | Scotch-Brite™ Surface Conditioning Disc SC-DH |
| | Stainless steel | | | |
| | Non ferrous metals | | | |

[View product information tables](#)

Right Angle Grinder



Advanced series – value-priced performance

| Application | Metal | Option 1 | Option 2 | Option 3 |
|------------------------------------|--------------------|---|---|---|
| Cutting | Mild/carbon steel | 3M™ Silver Cut-Off Wheel | 3M™ Cut and Grind Wheel | |
| | Stainless steel | | | |
| Edge rounding/ radiussing | Mild/carbon steel | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | Scotch-Brite™ Surface Conditioning Disc SE-DH (edge durability) | Scotch-Brite™ Surface Conditioning Disc SC-DH |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Deburring | Mild/carbon steel | Scotch-Brite™ Light Grinding and Blending Disc Disc GB-DH | Scotch-Brite™ Deburr and Finish PRO Unitized Disc DP-UD | 3M™ 769F flap disc Scotch-Brite™ Bristle Brush |
| | Stainless steel | Scotch-Brite™ Deburr and Finish PRO Unitized Disc DP-UD | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | |
| | Non ferrous metals | | | |
| Grinding/weld preparation | Mild/carbon steel | 3M™ Fibre Disc 782C 36+ | 3M™ Silver Depressed Centre Grinding Wheel | 3M™ Cubitron™ II Flexible Grinding Wheel |
| | Stainless steel | 3M™ Fibre Disc 787C 36+ | 3M™ Flap Disc 769F 40+ | |
| | Non ferrous metals | | 3M™ Flap Disc 769F 40+ | |
| Notching/gauging | Mild/carbon steel | 3M™ Cut and Grind Wheel | | |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Weld grinding and stock removal | Mild/carbon steel | 3M™ Fibre Disc 782C 36+, 60+ | 3M™ Silver Depressed Centre Grinding Wheel | 3M™ Flap Disc 769F |
| | Stainless steel | 3M™ Fibre Disc 787C 36+ or 60+ | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | |
| | Non ferrous metals | | 3M™ Silver Depressed Centre Grinding Wheel | |
| Cleaning | Mild/carbon steel | Scotch-Brite™ Clean and Strip XT PRO Disc XO-RD | Scotch-Brite™ Bristle | Scotch-Brite™ Clean and Strip XT PRO Extra Cut Disc |
| | Stainless steel | | | |
| | Non ferrous metals | | | |

Continued...

[View product information tables](#)

Right Angle Grinder



Advanced series – value-priced performance (Continued)

| Application | Metal | Option 1 | Option 2 | Option 3 |
|---------------------|--------------------|---|---|---|
| Refining | Mild/carbon steel | 3M™ Fibre Disc 782C 60+ or 80+ | Scotch-Brite™ Light Grinding and Blending Disc GB-DH | 3M™ Flap Disc 769F |
| | Stainless steel | 3M™ Fibre Disc 787C 60+ 80+ or 120+ | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | |
| | Soft metals | | | |
| Blending | Mild/carbon steel | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | Scotch-Brite™ Light Grinding and Blending Disc GB-DH | 3M™ Flap Disc 769F |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Surface preparation | Mild/carbon steel | Scotch-Brite™ Light Grinding and Blending Disc GB-DH | Scotch-Brite™ Clean and Strip XT PRO Disc | 3M™ Flap Disc 769F |
| | Stainless steel | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | | |
| | Non ferrous metals | Scotch-Brite™ Surface Conditioning Disc SC-DH | | |
| Fine finishing | Mild/carbon steel | Scotch-Brite™ Deburr and Finish PRO Unitized Disc DP-UD | Scotch-Brite™ Precision Surface Conditioning Disc PN-DH | Scotch-Brite™ Surface Conditioning Disc SC-DH |
| | Stainless steel | | | |
| | Non ferrous metals | | | |

[View product information tables](#)

Factors Affecting the Perfect Finish



Given the ever-growing number of tools and consumables on the market, and the many tasks they are able to perform, the process of selecting the right solution is not a simple one, with many criteria needing to be considered.

The role of equipment

Perhaps the largest issue affecting abrasive consumables is the type and performance of the equipment with which they will be used. Even the best quality abrasives, if not used in the right way on the right types of machinery, are unlikely to deliver the required results.

When it comes to power, in almost every case, more is better.

Not only will each workpiece be processed more quickly, but the greater speed means less heat and less potential for damage.

The force being applied by the machinery must also be considered:

- ▶ A backing pad which is too soft will not maximise the efficiency of the abrasive
- ▶ A ribbed high-performance pad will deliver the required impact pressure to maximise the efficiency of the abrasive without adding to vibration but will leave a coarser finish

Achieving the right finish

Metalwork finishing usually demands either a cosmetic or a measured finish. In cosmetic applications, it is generally enough for the final product to have a good aesthetic appearance unless further processes such as painting, powder coating or lacquering are to take place, in which case the abrasive must deliver a surface which is sufficiently receptive to these coatings.

A measured finish will require the ability to demonstrate that the finished workpiece is within a pre-agreed tolerance.

These applications generally require the finest abrasives at the end of the process, and for that reason when specifying it is often easier to 'start at the finish'.





Product Information

Premium abrasives



**3M™ Cubitron™ II
Cut-Off Wheel**



**3M™ Cubitron™ II
Cut and Grind Wheel**



**3M™ Cubitron™ II
Depressed Centre
Grinding Wheel**



**3M™ Cubitron™ II Flexible
Grinding Wheel**



**3M™ Cubitron™ II
Flap Disc 969F**



**3M™ Cubitron™ II
Flap Disc 967A**




**3M™ Cubitron™ II
Fibre Disc 982CX Pro**



**3M™ Cubitron™ II
Fibre Disc 982C**



**3M™ Cubitron™ II
Fibre Disc 987C**



**Scotch-Brite™
Light Grinding and
Blending Disc**



**Scotch-Brite™
Precision Surface
Conditioning Disc**



**Scotch-Brite™
Deburr and Finish Pro**



**Scotch-Brite™
Clean and Strip XT Pro Disc**



**Scotch-Brite™
Clean and Strip XT Pro
Extra Cut Disc**



**Scotch-Brite™
Radial Bristle Disc RD-ZB**

[View product information tables](#)



Product Information

Advanced abrasives



3M™ Silver Cut-Off Wheel



3M™ Silver Depressed Centre Grinding Wheel



3M™ Flap Disc 769F



3M™ Cut and Grind Wheel



3M™ Fibre Disc 782C



3M™ Fibre Disc 787C



Scotch-Brite™
Surface Conditioning Disc

[View product information tables](#)



3M™ Cubitron™ II Cut-Off Wheel

– Premium series



◦ Cutting



3M™ Cubitron™ II Cut-Off Wheels are designed to provide high cut rates on all types of ferrous metals, stainless steels, alloy steels and cast iron. They offer long life to help reduce cost. Plus, their fast, cool cutting action helps make your job easier!

- ▶ Engineered to cut faster and last longer than competitive ceramic products
- ▶ 3M Precision-Shaped Grain is self-sharpening, runs cool and optimises mineral breakdown for extra-long life
- ▶ Rigid, reinforced resin-bonded wheel slices through almost all materials
- ▶ Wheel must have a maximum operating speed greater than or equal to the maximum speed of the power tool used

Increase worker safety with 3M™ Cubitron™ II



Using 3M™ Cubitron™ II Cut-Off Wheels can help to:

- ▶ Minimise hand-arm vibration – less time on the tool due to its fast cutting abrasive grain
- ▶ Reduce airborne particles - longer, larger swarf staying airborne for less time
- ▶ Reduce noise exposure by completing the task quicker

[View product information tables](#)

3M™ Silver Cut-Off Wheel

– Advanced series



◦ Cutting



3M™ Silver Cut-off Wheels are a new kind of advanced performance wheel designed to be affordable for everyday use. Featuring 3M Precision-Shaped Grain technology, these innovative wheels deliver fast, smooth cutting action on all types of ferrous metals, stainless steels and alloy steels.

- ▶ Cuts cleanly with minimal burrs
- ▶ Cuts quickly through metal pipes, tubes, flat sheets and more
- ▶ 3M Precision-Shaped Grain cuts cleanly and fast, helping to increase productivity
- ▶ Long-lasting wheel provides great performance value

TOP TIPS




Cut-off wheels perform better the faster they run, so having a tool able to maintain speed is crucial. **WARNING:** Do not exceed the specified maximum RPM.

[View product information tables](#)



3M™ Cubitron™ II Cut and Grind Wheel

– Premium series

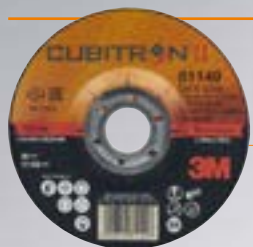

◦ Cutting and gouging



Specially for gauging and notching applications. Designed to be used as both a depressed centre grinding wheel and a cut-off wheel for outstanding versatility. Less chatter on back gouging and root pass grinding.

- ▶ Premium series: 3M™ Cubitron™ II Cut and Grind Wheels
- ▶ These versatile wheels are designed to be used both as a depressed centre grinding wheel and as a cut-off wheel – making them ideal for cutting, grinding, gouging and more
- ▶ After 10 minutes of use, they nearly double the output of our closest competitor while removing nearly 2x the material

[View product information tables](#)

3M™ Cut and Grind Wheel

– Advanced series



◦ Cutting and gouging



3M™ Cut and Grind Wheels contain Precision-Shaped Grain for fast cut and long life. Specifically formulated to be used on mild and stainless steel for all gauging, grinding and notching applications.


- ▶ Fast cut
- ▶ Long life
- ▶ Cool cutting
- ▶ Perfect value/price choice

[View product information tables](#)



3M™ Cubitron™ II Depressed Centre Grinding Wheel

– Premium series

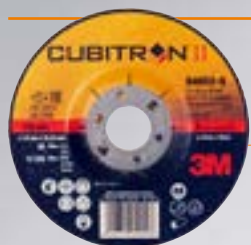

- Deburring
- Edge preparation/bevelling
- Weld grinding and stock removal



3M™ Cubitron™ II depressed centre grinding wheels with 3M Precision-Shaped Grain are engineered to cut faster than competitive ceramic products, offering significant productivity gains.

- ▶ Triangular shaped ceramic grain wears evenly, runs cool, and optimises mineral breakdown, for extra long life
- ▶ Rigid, reinforced resin-bonded wheel slices through almost all materials including stainless steel, mild steel, and aerospace alloys
- ▶ Wheel must have a maximum operating speed greater than or equal to the maximum speed of the power tool used

Increase worker safety with 3M™ Cubitron™ II

Using 3M™ Cubitron™ II Depressed Centre Grinding Wheels can help to:

- ▶ Reduce hand-arm vibration by up to 64%
- ▶ Reduce airborne particles released into the workplace by up to 40%*
- ▶ Reduce noise level by up to 3dB*

*Compared to a conventional abrasive grinding disc – according to independent testing by VITO and the Fraunhofer Institute



[View product information tables](#)

3M™ Silver Depressed Centre Grinding Wheel

– Advanced series



- Deburring
- Edge preparation/bevelling
- Weld grinding and stock removal



- ▶ Suitable for heavy grinding, bevelling and weld removal
- ▶ 3M Precision-Shaped Grain cuts cleanly and fast, helping to increase productivity
- ▶ Long-lasting wheel provides great performance value
- ▶ Use on a variety of substrates such as carbon steel and stainless steel

[View product information tables](#)



3M™ Cubitron™ II Flexible Grinding Wheel

- Premium series



- Deburring
- Edge preparation/bevelling
- Grinding
- Shaping and sanding



The 3M™ Cubitron™ II Flexible Grinding Wheel is designed to help you grind, shape and sand as fast as possible on a variety of metal materials. Utilising 3M Precision-Shaped Grain that cuts fast and cool, while still offering enhanced flexibility.

3M™ Cubitron™ II Flexible Grinding Wheels provide a faster cut and less than half the wear of our next-best flexible grinding wheel. The world's first flexible grinding wheel featuring revolutionary 3M Precision-Shaped Grain – an advanced abrasive construction featuring microreplicated shapes that slice through metal to cut faster, last longer and run cooler than conventional abrasives.

- ▶ Designed to grind, shape and sand on a variety of metal materials
- ▶ 3M™ Precision-Shaped Grain offer excellent cut rate and enhanced flexibility vs standard depressed centre grinding wheels
- ▶ Resin bond helps retain strength and performance under grinding operations
- ▶ Available in a variety of sizes and grades

[View product information tables](#)

3M™ Cubitron™ II Flap Disc 969F

- Premium series



- Deburring
- Weld grinding and stock removal
- Blending
- Surface preparation
- Refining



3M™ Cubitron™ II Flap Disc 969F is made with layers of abrasive material. Our flap discs are unique in design and feature a fast cutting abrasive material on flaps of tough polyester cloth. These discs come with a grinding aid and semi-flexible, Y-weight, backing gives each flap excellent strength.

- ▶ Abrasive flap design provides a soft and smooth cut on rounded or irregular surfaces
- ▶ Flaps wear down to expose fresh abrasive mineral, assuring a fast and consistent cut
- ▶ 3M™ Cubitron™ II abrasive cuts exceptionally fast, helping increase productivity
- ▶ Durable polyester backing material for high unit pressure applications

Increase worker safety with 3M™ Cubitron™ II

SAFETY
BUILT IN

Using 3M™ Cubitron™ II Flaps Discs can help to:

- ▶ Minimise hand-arm vibration by up to 32%*
- ▶ Reduce airborne particles – longer, larger swarf staying airborne for less time
- ▶ Reduce noise exposure - completing the task quicker

*Compared to a conventional abrasive flap disc – according to independent testing by VITO and the Fraunhofer Institute

[View product information tables](#)



3M™ Cubitron™ II Flap Disc 967A

– Premium series



- Blending
- Surface preparation



3M™ Cubitron™ II Flap Disc 967A is ideal for low to medium-high pressure applications on flat surfaces or outside edgework, especially in paint prep and stainless steel fabrication where final finish and gouge resistance are important.

- ▶ 3M Precision-Shaped Grain maintains super-sharp points that cut exceptionally fast with less pressure
- ▶ Engineered to run cooler, reducing metal discolouration/oxidation and the chance of heat related stress cracks
- ▶ Flaps grind and blend in a single step
- ▶ Durable Y-weight poly-cotton backing delivers controlled, even wear for full use of the disc on low to medium-high pressure applications

TOP TIPS




3M™ Cubitron™ II Flap Discs will often produce a finish equivalent to the next-finer grade of a fibre disc (i.e., a 60-grit flap disc will usually leave a finish similar to an 80-grit fibre disc) – saving you time and finishing steps!

[View product information tables](#)

3M™ Flap Disc 769F

– Advanced series



- Deburring
- Weld grinding and stock removal
- Blending
- Surface preparation
- Refining



3M™ Flap Disc 769F is our long-lasting, high-performance abrasive flap disc featuring 3M Precision-Shaped Grain and a durable polyester backing.

- ▶ Delivers long-lasting high-performance and versatility
- ▶ Cuts faster and lasts longer than conventional abrasive grain thanks to 3M Precision-Shaped Grain
- ▶ Proven to outperform traditional alumina zirconia flap discs
- ▶ Individual flaps break down, exposing fresh mineral to deliver consistent cut rate for the life of the disc

[View product information tables](#)



3M™ Cubitron™ II Fibre Disc 982CX Pro

– Premium series



- Heavy deburring
- Edge preparation/bevelling
- Weld grinding and stock removal



Get more done with 3M™ Cubitron™ II Fibre Disc 982CX Pro. With a re-engineered 3M Precision-Shaped Grain, these fibre discs take the legendary cutting speed and life of 3M™ Cubitron™ II abrasives to a new level. Available in 36+ grit for medium and high pressure applications like weld grinding, bevelling and heavy deburring.

- ▶ Re-engineered 3M Precision-Shaped Grain takes legendary speed and life to a new level
- ▶ Longest-lasting 3M fibre disc helps boost productivity and minimise disc changes in manual and automated applications
- ▶ Triangular ceramic grain wears evenly, runs cool and stays sharp through the life of the disc
- ▶ Cuts with less pressure than traditional fibre discs, helping reduce the demands on operators
- ▶ Recommended for carbon steel

Differences between 982CX Pro and 982C discs:

| | 982CX Pro | 982C |
|--------------|--|--------------------------------|
| Applications | Both are designed to target the same substrate and applications. | |
| Grade range | Available in 36+ grit | Available in 36+/60+/80+ grits |
| Performance | 982CX Pro has improved performance value ratio | |
| Price | Corresponding grades have similar price | |
| Composition | 982CX Pro meets INOX and Contaminant Free requirements | |

[View product information tables](#)

3M™ Cubitron™ II Fibre Disc 982C

– Premium series



- Deburring
- Edge preparation/bevelling
- Weld grinding and stock removal
- Blending
- Refining



3M™ Cubitron™ II Fibre Disc 982C slices through carbon steel with 3M Precision-Shaped Grain and generates up to twice the cut-rate, durability, and life of other fibre discs—all with less grinding pressure. That means less operator fatigue, faster throughput, and more parts per disc when tackling high pressure grinding applications such as medium to heavy-duty stock removal. Available in 36+, 60+, 80+ grades.

- ▶ Disc life is significantly longer, completing more parts per disc and requiring fewer disc changes
- ▶ Triangular shaped ceramic grain lasts up to two times longer than other ceramic abrasives—it wears evenly, runs cool, and optimises mineral breakdown
- ▶ Stiff fibre backing and a strong resin bond provide durability and tear-resistance for heavyweight applications such as high-pressure weld grinding and bevelling
- ▶ Roloc™ options available

Increase worker safety with 3M™ Cubitron™ II

**SAFETY
BUILT IN**

Using 3M™ Cubitron™ II 982C can help to:

- ▶ Reduce hand-arm vibration by up to 91%
- ▶ Reduce airborne particles released into the workplace by up to 71%*
- ▶ Reduce noise level by up to 6dB*

*Compared to a conventional abrasive grinding disc – according to independent testing by VITO and the Fraunhofer Institute

[View product information tables](#)



3M™ Cubitron™ II Fibre Disc 987C

– Premium series



- Deburring
- Edge preparation/bevelling
- Weld grinding and stock removal
- Blending
- Refining



3M™ Cubitron™ II Fibre Disc 987C offers significant gains in productivity on medium to heavy-duty operations with our exceptionally high-performing 3M Precision-Shaped Grain combined with a stiff fibre backing. This disc achieves a higher cut-rate, greater durability, and longer life than other fibre discs—all with less grinding pressure.

- ▶ 3M Precision-Shaped Grain maintains super-sharp points that cut exceptionally fast with less pressure
- ▶ Runs cooler and disc life is significantly longer, completing more parts per disc and requiring fewer disc changes
- ▶ Stiff fibre backing and a strong resin bond provide durability and tear-resistance for heavyweight applications such as high-pressure weld grinding or bevelling
- ▶ Grinding aid incorporated on the disc minimises grinding temperatures for heat-sensitive alloys
- ▶ Roloc™ options available

TOP TIPS




When blending, fibre discs can have a faster cut than other options, but may be trickier for inexperienced operators to control. Use grades 80+ and a 3M semi-hard back up pad for blending.

[View product information tables](#)

3M™ Fibre Disc 782C

– Advanced series



- Deburring
- Edge preparation/bevelling
- Weld grinding and stock removal
- Blending
- Refining



3M™ Fibre Disc 782C is engineered for an ultra-rapid cut on carbon steel. These discs feature our advanced abrasive technology, 3M Precision-Shaped Grain. Their stiff fibre backing and strong resin bond provides durability and tear resistance.


- ▶ Cuts carbon steel rapidly
- ▶ 3M Precision-Shaped Grain yields higher cut rates
- ▶ Reduce costs with long lasting abrasive – completes more parts than conventional discs
- ▶ Roloc™ options available

[View product information tables](#)



3M™ Fibre Disc 787C

– Advanced series

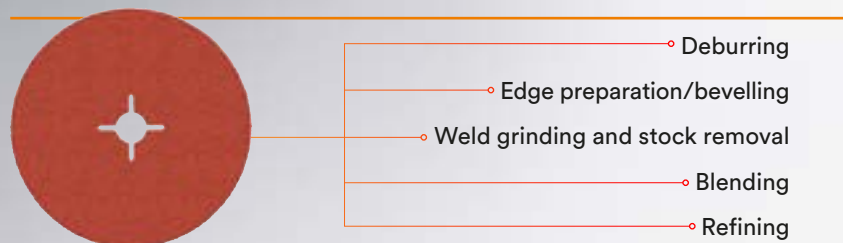

3M™ Fibre Disc 787C is featuring our advanced abrasive technology, 3M Precision-Shaped Grain. These discs have a stiff fibre backing and strong resin bond that provide durability and tear resistance. They're constructed with a grinding aid and are engineered for ultra-rapid cut.

- ▶ Cuts hard and fast to grind metals like stainless steel and high nickel alloys
- ▶ 3M Precision-Shaped Grain yields higher cut rates
- ▶ Grinding aid minimises grinding temperatures for heat-sensitive alloys
- ▶ Roloc™ options available

TOP TIPS



When blending, fibre discs can have a faster cut than other options, but may be trickier for inexperienced operators to control.

Use grades 80+ and 120+ with a 3M semi-hard back up pad for blending.

[View product information tables](#)

Scotch-Brite™ Light Grinding and Blending Disc

– Premium series



Scotch-Brite™ Light Grinding and Blending Discs use a ceramic abrasive grain blend to achieve a high cut-rate for optimal weld grinding and blending in mild-steel applications. In these instances, Light Grinding and Blending discs are designed to effectively blend and refine a grade 36 scratch or finer.


- ▶ Grinds and blends in a single step
- ▶ 3M™ ceramic aluminium oxide abrasives cut fast and consistent over the life of the disc
- ▶ Durable construction resists edge wear
- ▶ Scotch-Brite™ material won't melt on hot welds, allowing blending without waiting
- ▶ Can be used on fibre disc back up pad or 3M™ Hook-and-Loop Backup Pads
- ▶ Roloc™ options available

[View product information tables](#)



Scotch-Brite™ Precision Surface Conditioning Disc

– Premium series

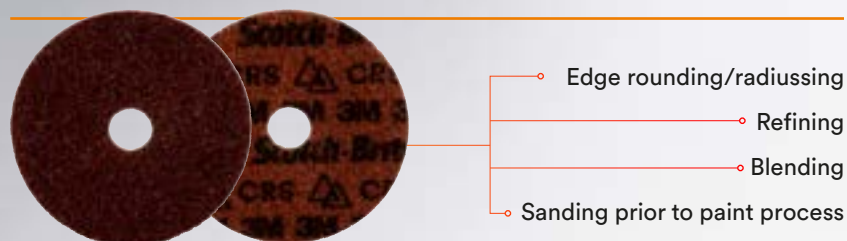

Meet the next advancement in surface conditioning technologies: Scotch-Brite™ Precision Surface Conditioning Discs. This new addition to the Scotch-Brite™ lineup promises the consistency you've come to expect with increased cutting speed and longer abrasive life. By combining two flagship 3M technologies — nonwoven fibre and ceramic 3M Precision-Shaped Grain — you can get the ideal finish, faster. To help you be even more efficient, these discs come in brighter, more vivid colors to make identification easier. Plus, the grade range has been expanded to include Fine and Extra Coarse offerings, providing an even larger range of solutions for your abrasive needs.


These premium general-purpose discs are designed to streamline surface conditioning processes including cleaning, blending, deburring and finishing. Typical substrates include aluminum and soft metals, carbon steel and stainless steel, with applications ranging from coating and corrosion removal to refining and post-cast processing.

- ▶ Now with 3M Precision-Shaped Grain technology
- ▶ Designed for ease of use and consistent surface finishing results
- ▶ Cleans and finishes surfaces without gouging, undercutting or damaging the base material
- ▶ Suitable for aluminum and soft metals, carbon steel, stainless steel, composite, plastics and more
- ▶ Available in Hook and Loop and Roloc™ format

[View product information tables](#)

Scotch-Brite™ Surface Conditioning Discs

– Advanced series

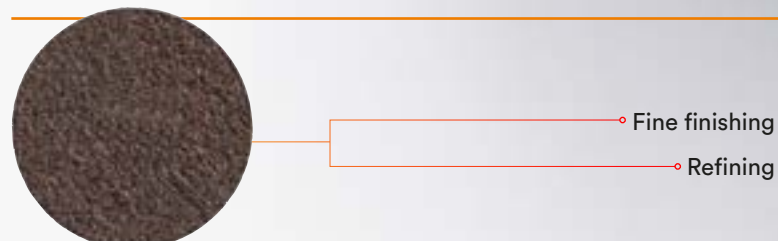

The ideal choice for general purpose surface conditioning, including finishing, cleaning and light deburring. Helps you achieve a consistent, paintable finish in fewer steps without damaging the base material. Durable open-web construction is designed to resist loading and greatly increase the life of the disc — so you don't have to change discs as often. Easily attaches to and removes from 3M™ Hook-and-Loop Back-Up Pads.

- ▶ Open web material runs cool and resists loading for prolonged operation
- ▶ Conformable disc conditions surfaces without gouging, undercutting, or damaging the base material
- ▶ Suitable for metal, composite, plastics, and other materials
- ▶ Roloc™ options available

[View product information tables](#)



Scotch-Brite™ Clean and Strip XT Pro Disc

– Premium series



- Surface preparation
- Clean paint, rust and coatings



Scotch-Brite™ Clean and Strip XT Pro Disc features silicon carbide abrasive mineral incorporated into an open nylon web.

It's a durable disc that wont damage the base metal.

- ▶ Made with silicon carbide material, perfect for cleaning
- ▶ Rust, paint, light mill scale removal
- ▶ Maintains workpiece shape, removes coatings
- ▶ Low sparking
- ▶ Roloc™ options available

TOP TIPS



Why will it win against wire-based products?

- ▶ Safer to use – no flying wires
- ▶ More aggressive for faster and more effective cleaning action
- ▶ Tears to produce fresh abrasive producing consistent action as opposed to fatiguing in use

[View product information tables](#)

Scotch-Brite™ Clean and Strip XT Pro Extra Cut Disc

– Premium series



- Clean paint, rust and coatings



Scotch-Brite™ Clean and Strip XT Pro Extra Cut Disc features hard aluminium oxide mineral incorporated into an open nylon web.

It's a durable disc that cuts to bare metal quickly.

- ▶ Made with aluminium oxide material, ideal for cleaning plus blending and surface preparation
- ▶ Heavy rust and rust pit removal without leaving divots
- ▶ Thick paint and coating removal
- ▶ Blend, strip and refine to bare metal quickly
- ▶ Roloc™ options available

Increase worker safety with Scotch-Brite™

Using Scotch-Brite™ Clean and Strip XT Pro Disc can help to:

**SAFETY
BUILT IN**


- ▶ Mitigate risk – contains no wire filaments for improved safety
- ▶ Reduce vibration – less time on the tool
- ▶ Reduce operator fatigue – less operator pressure required

[View product information tables](#)



Scotch-Brite™ Deburr and Finish Pro Unitised Disc DP-UD

– Premium series

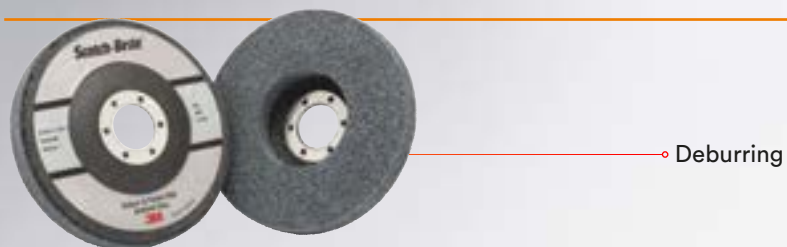

Deburring



For up to 30 to 50% faster burr removal and up to 3× longer wheel life in deburring applications. Minimises overcutting – results in fewer rejects.

- ▶ Utilises 3M proprietary Precision-Shaped Grain technology for higher cutting and durability performance in deburring and blending applications
- ▶ Minimal dust and debris – less dust equals less clean up
- ▶ Perform faster deburring

TOP TIPS



Why will it win against a flap disc?

- ▶ Won't gouge surface – reduction in rework, deskills the job
- ▶ Leaves a better finish – removes need for extra steps, reducing production time
- ▶ More comfortable – easier to work with and reduces vibration

[View product information tables](#)

Scotch-Brite™ Radial Bristle Disc BD-ZB

– Premium series



Surface preparation

Clean paint, rust and coatings



Scotch-Brite™ Bristle Discs are made of plastic impregnated with 3M™ Cubitron™ II abrasive grain and moulded into a disc. Moulded, abrasive-filled bristles strip, deburr, blend, finish, polish, clean, and remove coatings more effectively, with less pressure than wire brushes. Flexible bristles require less pressure than wire brushes and conform to contours, even on complex parts.

- ▶ Bristle spacing is ideal for coating removal and other high-loading substances
- ▶ Contains no wire filaments for improved safety
- ▶ Scotch-Brite™ Bristle Disc, using ceramic abrasive grain and moulded, flexible bristles, provides more surface contact than wire brushes and maintains abrasive property throughout the life of the disc
- ▶ The fast-running disc removes paint, stains, adhesives, weld burns, rust, heavy oxides, and surface contaminants from large areas

Increase worker safety with Scotch-Brite™

SAFETY
BUILT IN

Using Scotch-Brite™ Radial Bristle Disc can help to:

- ▶ Reduce operator fatigue – less pressure required
- ▶ Reduce vibration – less time on the tool
- ▶ Mitigate risk – contains no wire filaments for improved safety

[View product information tables](#)

Accessory information



3M™ High Performance Ribbed Back-Up Pad



- ▶ Unique rib pattern
- ▶ Red ribbed form resistance temperature 205°C ISO 75-1/-2
- ▶ Use to extend the cut rate and lifespan of 3M™ Cubitron™ II discs
- ▶ Recommended for use with 36+ fibre discs

Maximise the lifespan and cut rate of 3M™ Cubitron™ II discs by using 3M™ High Performance Ribbed Back-Up Pad with them. When paired with 3M™ Cubitron™ II discs, our back-up pads help to make processes more efficient, while lowering costs.

[View product information tables](#)

3M™ High Performance Flat Back-Up Pad



- ▶ Provides even support across the surface of the disc
- ▶ Hard density backing, suitable for most metalworking applications
- ▶ Use with right angle, pneumatic or electric sanders
- ▶ Recommended for use with 60+, 80+ and 120+ fibre discs

Our 3M™ Fibre Disc Back-up Pads provide a sturdy support for fibre backed discs, which enhances the power of the abrasive when sanding, deburring and finishing. Made of a tough plastic material, which gives support evenly across the surface of the disc. These hard density back-up pads are strong yet still slightly flexible, which allows for smooth application of abrasive discs to metal surfaces.

[View product information tables](#)

Accessories



3M™ Ribbed Fibre Disc Back-Up Pad



- ▶ Unique rib pattern
- ▶ Black ribbed form resistance temperature 120°C ISO 75-1/-2
- ▶ Use to extend the cut rate and lifespan of 3M™ 5- and 7-series fibre discs in stock removal applications
- ▶ Improve work processes while lowering costs

[View product information tables](#)

3M™ Centre Pin Back-Up Pad



- ▶ Quick and easy placement and centring of discs
- ▶ Does not interfere with work surface
- ▶ Allows disc to be used at usual angle

The Scotch-Brite™ Centre-Pin Back Up Pads are used in conjunction with Scotch-Brite™ Surface Conditioning discs.

Quickly and easily place centre Scotch-Brite™ Surface Conditioning discs with 3M™ Centre Pin Back-Up Pads. Our pads allow the discs to be used at the usual angle.

[View product information tables](#)

Accessories




3M™ Flat Fibre Disc Back-up Pad




- ▶ Provides even support across the surface of the disc
- ▶ A medium density backing, suitable for most metalworking applications
- ▶ Recommended when working on curved surfaces
- ▶ Use with right angle, pneumatic or electric sanders
- ▶ Recommended for use with 60+, 80+ and 120+ fibre discs
- ▶ Black plain Form resistance temperature 80°C
ISO 75-1/-2
- ▶ 5- and 7-series fibre discs in finishing applications

[View product information tables](#)

File Belt Sander

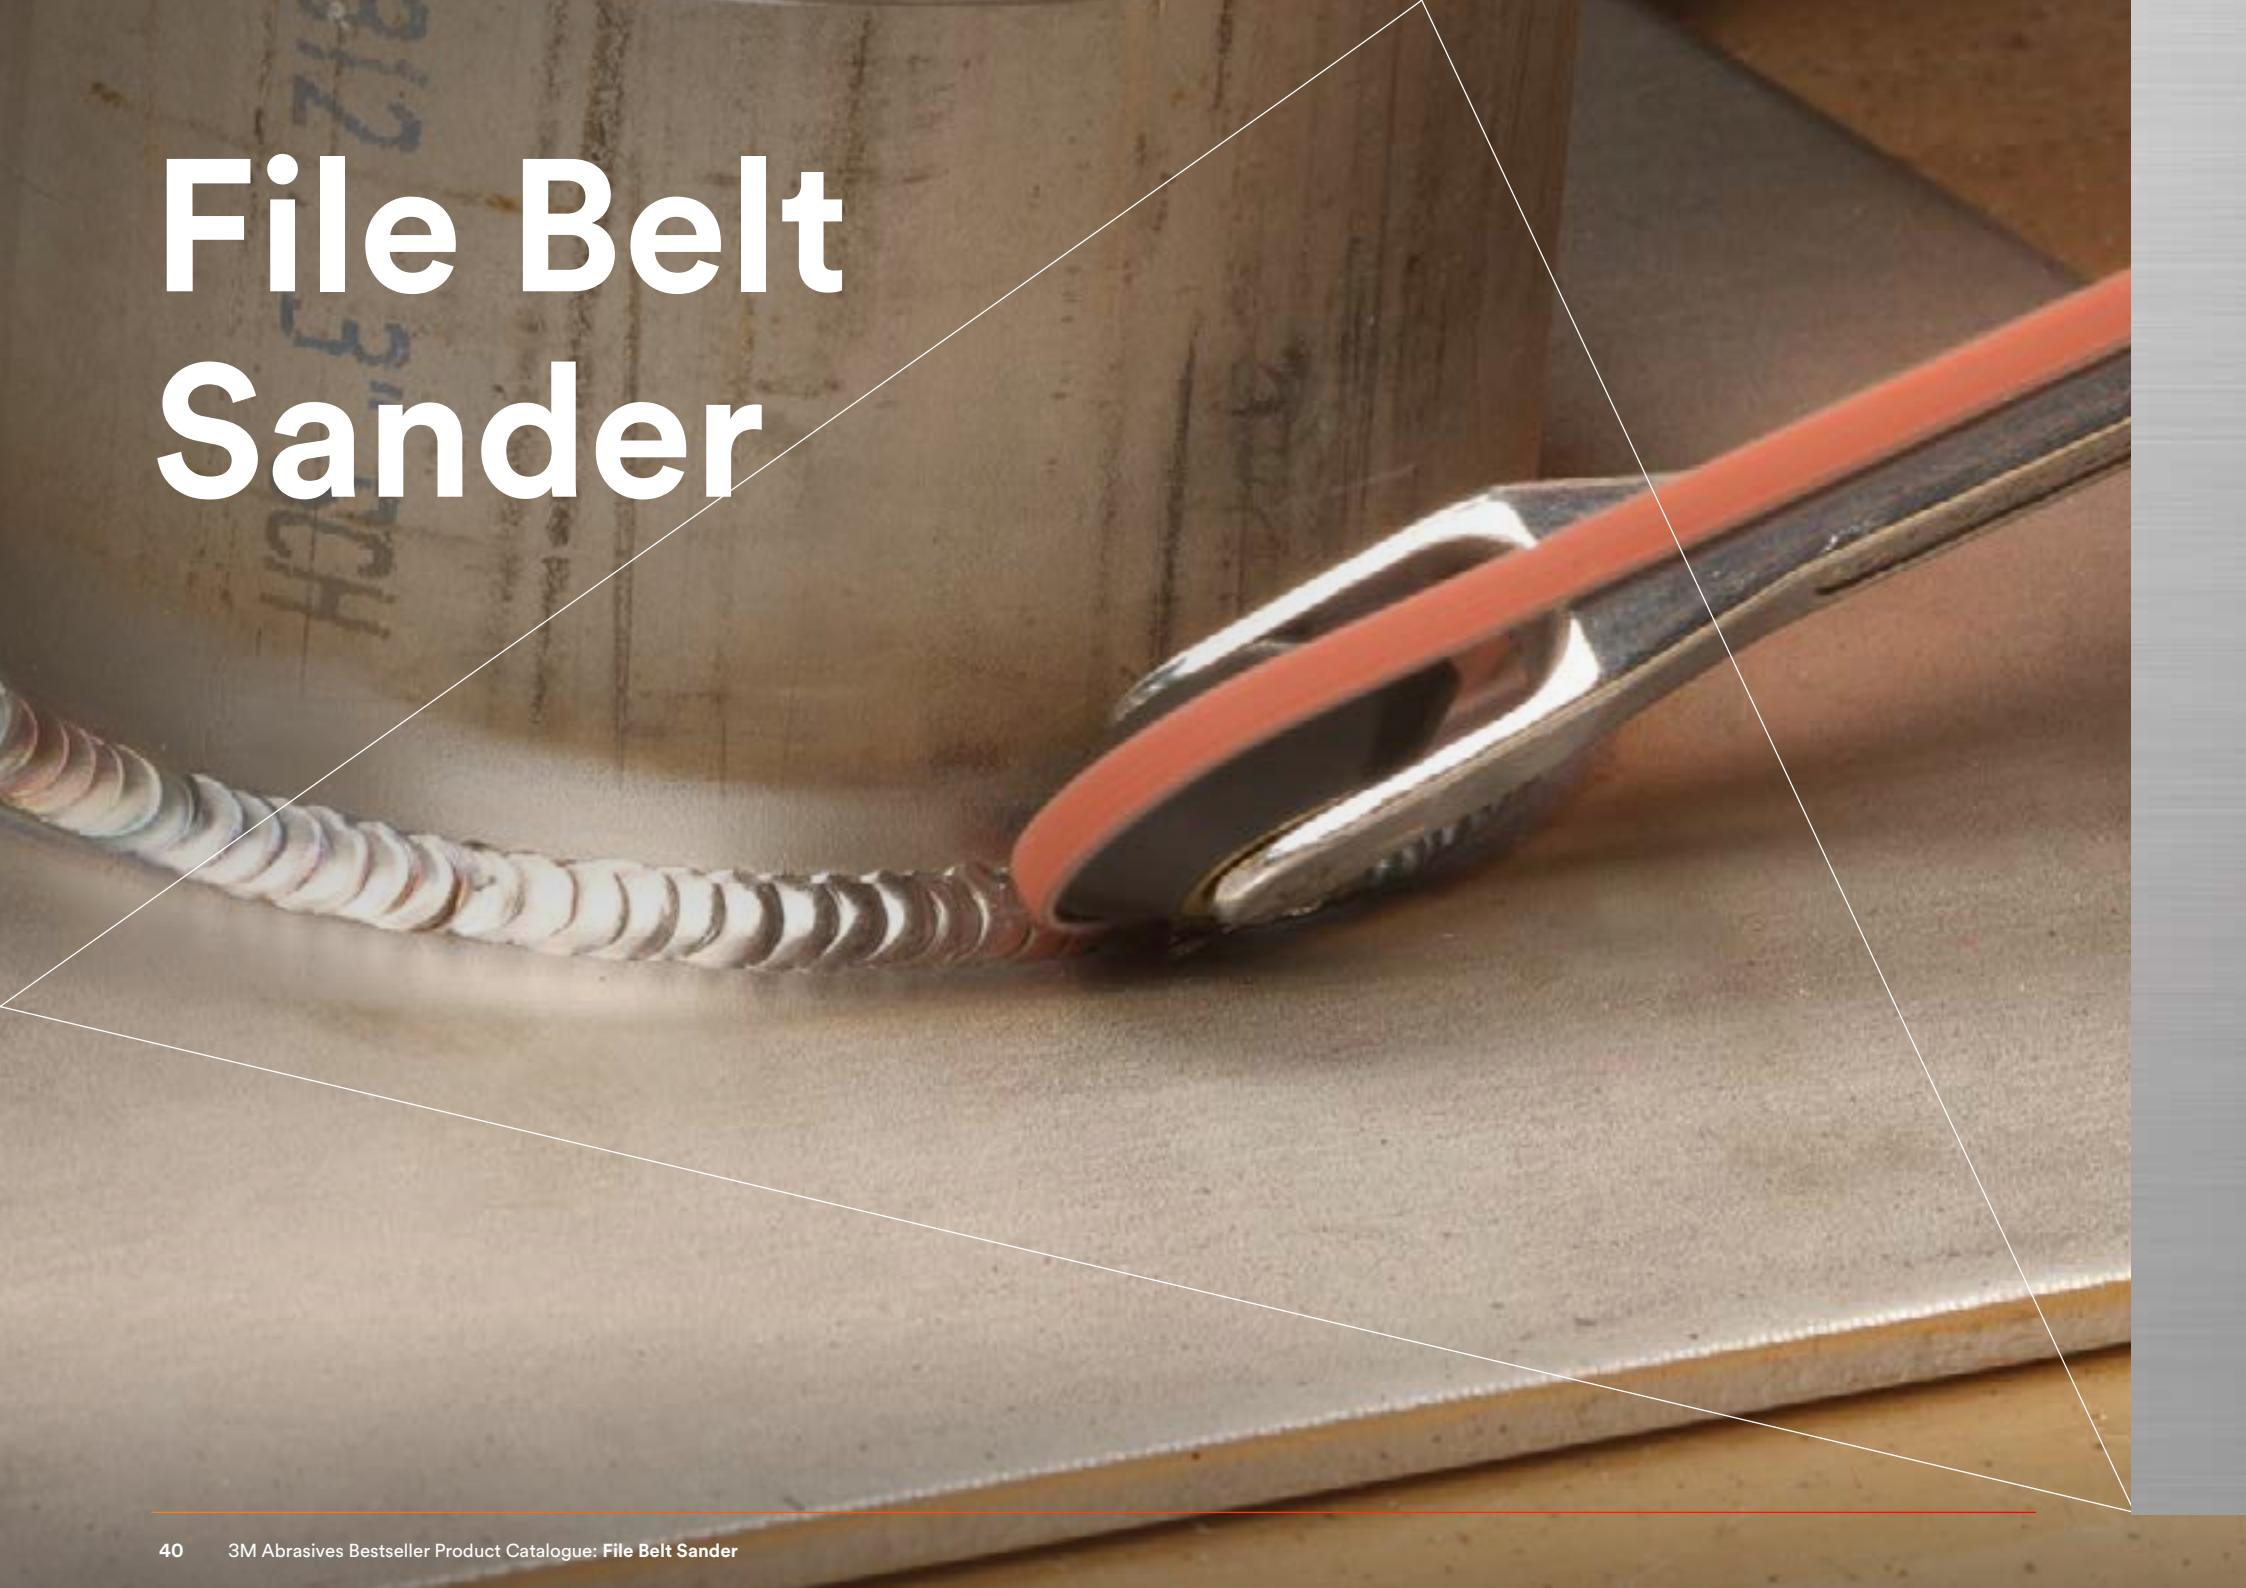

File Belt Sander



The file belt sander is ideal for a variety of metalworking applications, such as deburring, cleaning, blending and finishing, in tight or hard-to-reach areas.

- ▶ Balanced weight distribution and 3M™ Gripping Material for improved ergonomics and reduced wrist strain
- ▶ 360 degree rotatable housing and handle for the ultimate in versatility
- ▶ Attached belt cover won't fall off during belt changes
- ▶ Optimised belt speed for 3M™ Abrasive Belts and Scotch-Brite™ Belts
- ▶ Different positions for the handle, the head and the sander arm allow reach into small and complex areas
- ▶ Robust design for a long product life
- ▶ Easy to use and control

TOP TIPS




This is the ideal tool for fillet weld removal.

Where is it used?

Used for a variety of metalworking applications such as – grinding, blending and finishing hard to reach areas with power and efficiency.

What segment is it used in?

- ▶ Optimal system for stainless steel fabrications
- ▶ Metal fabrications*
*Optimal system for stainless steel fabrications
- ▶ Industrial equipment
- ▶ Transportation
- ▶ Machinery and equipment
- ▶ General metal working




Machine information

- ▶ Power tool
- ▶ Operating pressure: 6 bar
- ▶ Motor HP (W): 0.60 (450)
- ▶ Max RPM: 22,000
- ▶ Airflow rate (metric): 764 LPM
- ▶ Steel drive wheel attached
- ▶ Includes standard attachment arm and rubber drive wheel
- ▶ 24" belts require 3M™ File Belt Sander Extension (PN28376)

[View product information tables](#)

File Belt Sander



Application guide

| Application | Metal | Option 1 | Option 2 | Option 3 |
|---------------------------------|--------------------|--|--|---------------------------------------|
| Deburring | Mild/carbon steel | Scotch-Brite™ Belt DF-BL 3M™ Cubitron™ II Belt 784F | Scotch-Brite™ Belt SC-BL A CRS 3M™ Cubitron™ II Belt 984F | 3M™ Belt 384F |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Grinding/weld preparation | Mild/carbon steel | 3M™ Cubitron™ II Belt 784F | 3M™ Cubitron™ II Belt 984F | 3M™ Belt 384F |
| | Stainless steel | 3M™ Cubitron™ II Belt 981F | | |
| | Non ferrous metals | 3M™ Cubitron™ II Belt 981F | | |
| Weld grinding and stock removal | Mild/carbon steel | 3M™ Cubitron™ II Belt 784F | 3M™ Cubitron™ II Belt 984F | 3M™ Belt 384F |
| | Stainless steel | | 3M™ Cubitron™ II Belt 947A | |
| | Non ferrous metals | | 3M™ Cubitron™ II Belt 947A | |
| Scale, rust, paint removal | Mild/carbon steel | 3M™ Cubitron™ II Belt 784F | 3M™ Cubitron™ II Belt 947A | 3M™ Belt 384F |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Weld cleaning | Mild/carbon steel | Scotch-Brite™ Belt SC-BL AMED/AFIN | Scotch-Brite™ Belt DF-BL AMED/AFIN | |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Refining | Mild/carbon steel | Scotch-Brite™ Belt SC-BL ACRS | Scotch-Brite™ Belt DF-BL AMED/AFIN | 3M™ Trizact™ Belt 237AA A65, A45, A30 |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Blending | Mild/carbon steel | Scotch-Brite™ Belt DF-BL ACRS/AMED | Scotch-Brite™ Belt SC-BL ACRS/AMED | |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Surface preparation | Mild/carbon steel | Scotch-Brite™ Belt SC-BL | Scotch-Brite™ Belt DF-BL | |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Fine finishing | Stainless steel | Scotch-Brite™ Belt SC-BL | 3M™ Trizact™ Belt 337DC | |
| | Non ferrous metals | 3M™ Trizact™ Belt 237AA | | |

[View product information tables](#)

For more product information and product ordering information please go the [Belt product selection section](#).

Products



Key products



Scotch-Brite™ Durable Flex File Belt DF-BL



3M™ Cubitron™ II Belt 784F



3M™ Cubitron™ II Cloth Belt 984F




3M™ Cubitron™ II Belt 947A



Scotch-Brite™ Belt SC-BS



3M™ Trizact™ Belt 237AA

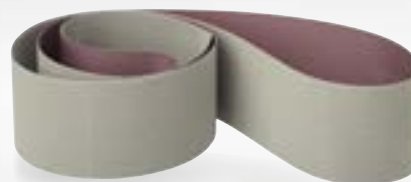

3M™ Trizact™ Belt 217EA



3M™ Trizact™ Belt 337DC

[View product information tables](#)

For more product information and product ordering information please go the [Abrasive Belts Product Selection](#) section.

Linear Finishing Machine



Linear Finishing Machine



The linear finishing machine is a single system for graining, blending, refining and finishing especially for stainless steel fabrications. Often referred to as inline sanding machine.


What is it used for?

These tools are used to create a linear finish on stainless steel and other metals.

- ▶ Optimum system for finishing stainless steel due to its convenience, flexibility and portability
- ▶ Ideal for various blending and finish matching on metal parts
- ▶ Ideal for flat, accessible areas
- ▶ Variable speed allows for a high speed for refining and a lower speed for finishing
- ▶ Ideal for various blending and finish matching on metal parts
- ▶ Efficient way to generate or restore straight line finishes
- ▶ Easy to control and simplifies finish matching

What segment is it used in?

- ▶ Optimal system for stainless steel fabrications
- ▶ Metal fabrication
- ▶ Architectural and construction
- ▶ Industrial equipment
- ▶ Pharmaceutical/tanks and vessels



Machine information

- ▶ Electric or pneumatic
- ▶ Standard shaft – 19mm with key for positive drive
- ▶ Drums and brushes have corresponding 19mm centre with keyways to match
- ▶ RPM ranges: 900-3800
- ▶ Power watt ranges: 1200 – 17500

[View product information tables](#)

Linear Finishing Machine



Application guide

| Application | Metal | Option 1 | Option 2 |
|--------------------------|--------------------|---|-------------------------------------|
| Refining | Mild/carbon steel | Scotch-Brite™ Belt SC-BL ACRS | Scotch-Brite™ Belt DF-BL AMED/AFIN |
| | Stainless steel | | |
| | Non ferrous metals | | |
| Blending/satin finishing | Mild/carbon steel | Scotch-Brite™ Belt DF-BL ACRS/AMED | Scotch-Brite™ Belt SC-BL ACRS/ AMED |
| | Stainless steel | | |
| | Non ferrous metals | | |
| Fine finishing | Stainless steel | Scotch-Brite™ Belt SC-BL 3M™ Trizact™ Belt 237AA | 3M™ Trizact™ Belt 307EA |
| | Non ferrous metals | 3M™ Trizact™ Belt 217EA | |

[View product information tables](#)

For more product information and product ordering information please go the **Abrasive Belts** section.

Products



Key products




3M™ Trizact™ Belt 237AA



3M™ Trizact™ Belt 337DC



**Scotch-Brite™ Satin Finishing
Mini Flap Brush SF-FB**



3M™ Cubitron™ II Belt 947A



**Scotch-Brite™ Belt
SC-BF A CRS**



**Scotch-Brite™ Belt
SC-BF A MED**



**Scotch-Brite™ Belt
SC-BF A VFN**

[View product information tables](#)

For more product information and product ordering information please go the **Abrasive Belts** section.

Scotch-Brite™ Surface Conditioning Film Backed Belt SC-BF



Scotch-Brite™ Surface Conditioning Film Backed Belt is a non-woven belt with a reinforced nylon film backing that is smooth, tough and stretch-resistant. Our belts are designed for efficient cleaning, finishing, blending and deburring. They work well with platens, or when reduced friction is required.

- ▶ A non-woven belt used for cleaning, finishing, blending and deburring applications. The smooth, tough, stretch-resistant nylon film backing works well with platens or when reduced friction is required
- ▶ Reduced friction from film backing
- ▶ Good starting point for finishing applications
- ▶ Resists loading
- ▶ Consistent finish
- ▶ Easy to use
- ▶ Grades: A CRS/A MED/A VFN
- ▶ Available in a range of sizes and grades, details on request

These belts offer an ideal way to add a good finish or remove burrs without gouging or under-cutting the work piece.

Suggested applications

- ▶ Use for cleaning, finishing, blending and deburring
- ▶ Belts work well with platens on e.g. stroke sanders, or when reduced friction is required such as on inflatable/expander drums
- ▶ Use to start finishing applications



◦ Blending/satin finishing

Product form: Belt

Mineral type: Aluminium oxide

Backing: Nylon film

Bonding type: Resin

Colour: Brown/maroon/blue

TOP TIPS



The Scotch-Brite™ SC-BF ACRS are a great option to match an existing 3B finish after the refinishing step.

[View product information tables](#)

Scotch-Brite™ Satin Finishing Mini Flap Brushes SF-FB



Scotch-Brite™ Satin Finishing Flap Brushes are impregnated with aluminium oxide abrasive mineral and bonded to a fibre core.

Scotch-Brite™ Satin Finishing Flap Brush features a three-dimensional web that produces consistent results without damaging the workpiece. The flexible flap construction is soft and pliable – giving uniform surface finishes without ‘chatter marks’.

- ▶ Consistent, repeatable results
- ▶ Uniform surface finish
- ▶ Resists heat build up on heat sensitive metals like stainless steel
- ▶ Wear resistant flaps give a long product life

Suggested applications

- ▶ Use to give a uniform cut and finish on stainless steel after refining step



- Deburring
- Weld grinding and stock removal
- Refining

Product form: Brush

Mineral type: Aluminium oxide

Attachment type: Keyed centre hole

Colour: Tan

Grade: Coarse

Max RPM: 4000

[View product information tables](#)

Backstand Machine



Backstand Machine

What are they used for?

Backstand machines are used for graining and finishing of most small fabricated parts and are ideal for higher volume and complex parts where greater control is needed on part to belt.


They can also increase the capability to achieve your desired finish through the choice of different contact wheel designs.

What segments are they used in?

- ▶ Metal fabrication
- ▶ Industrial equipment
- ▶ Transportation
- ▶ Machinery and equipment
- ▶ General metal working
- ▶ Medical implants



Backstand Machine




Application guide

| Application | Metal | Option 1 | Option 2 | Option 3 |
|---------------------------------|--------------------|--|--|---|
| Deburring | Mild/carbon steel | Scotch-Brite™ Belt DF-BL 3M™ Cubitron™ II Belt 784F | Scotch-Brite™ Belt SC-BL A CRS 3M™ Cubitron™ II Belt 984F | 3M™ Belt 384F |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Grinding/weld preparation | Mild/carbon steel | 3M™ Cubitron™ II Belt 784F | 3M™ Cubitron™ II Belt 984F | 3M™ Cubitron™ II Belt 947A 3M™ Belt 384F |
| | Stainless steel | | | |
| | Non ferrous metals | 3M™ Cubitron™ II Belt 981F | | |
| Weld grinding and stock removal | Mild/carbon steel | 3M™ Cubitron™ II Belt 784F | 3M™ Cubitron™ II Belt 984F 3M™ Cubitron™ II Belt 947A | 3M™ Belt 384F |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Scale, rust, paint removal | Mild/carbon steel | 3M™ Cubitron™ II Belt 784F | 3M™ Cubitron™ II Belt 947A | 3M™ Belt 384F |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Weld cleaning | Mild/carbon steel | Scotch-Brite™ Belt SC-BL AMED/AFIN | | |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Refining | Mild/carbon steel | Scotch-Brite™ Belt SC-BL ACRS | Scotch-Brite™ Belt DF-BL A CRS | 3M™ Trizact™ Belt 237AA A65, A45, A30 |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Blending | Mild/carbon steel | Scotch-Brite™ Belt DF-BL ACRS/AMED | Scotch-Brite™ Belt SC-BL, A CRS/ A MED | |
| | Stainless steel | | | |
| | Non ferrous metals | | | |

[View product information tables](#)

For more product information and product ordering information please go the **Abrasive Belts** section.

Backstand Machine




Application guide (continued)

| Application | Metal | Option 1 | Option 2 | Option 3 |
|---------------------|--------------------|---|--------------------------|----------------------------|
| Surface preparation | Mild/carbon steel | Scotch-Brite™ Belt SC-BL | Scotch-Brite™ Belt DF-BL | |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Fine finishing | Stainless steel | Scotch-Brite™ Belt SC-BL 3M™ Trizact™ Belt 237AA | 3M™ Trizact™ Belt 307EA | 3M™ Cubitron™ II Belt 784F |
| | Non ferrous metals | 3M™ Trizact™ Belt 217EA | | |

[View product information tables](#)

For more product information and product ordering information please go the **Abrasive Belts** section.

Products



Key products



3M™ Cubitron™ II Belt 784F



3M™ Cubitron™ II Cloth Belt 984F



Scotch-Brite™ Durable Flex Belt DF-BL



Scotch-Brite™ Belt SC-BL



3M™ Trizact Belt 237AA



3M™ Trizact™ Belt 337DC

[View product information tables](#)

For more product information and product ordering information please go the [Abrasive Belts Product Selection](#) section.

Abrasive Belts




Factors Affecting Performance and Finish



The two key components to ensure optimal abrasive performance include **selecting the correct product** and **running that product at the appropriate pressure**.

- ▶ Combining the right belt with the right application pressure is essential to reaching the optimal breakdownpoint of an abrasive, and it maximises both cutting speed and product life
- ▶ The wrong variable in either of these fields can lead to suboptimal results evident on the workpiece and the used belt

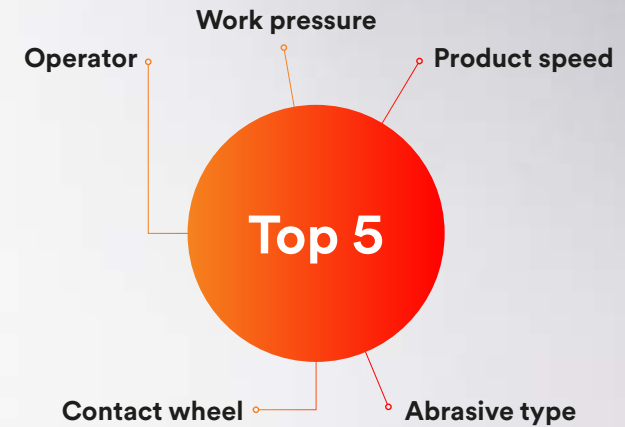

1. Operator

- ▶ Operator preferences
- ▶ Operator priorities and decision making
- ▶ Relationships with operators
- ▶ Politics in a plant
- ▶ Operator abilities
 - Experience level
 - Variability over time
 - 1st v. 2nd shift variables

2. Product speed

- ▶ Speed of the abrasive
- ▶ RPM (revolutions per minute)
- ▶ Metres per second
- ▶ Recommended operating speed by application

3. Contact wheel

- ▶ Wheel durometre (hardness)
- ▶ Serrated contact wheel
- ▶ Smooth contact wheel

4. Abrasive product

- ▶ Open or closed coat
- ▶ Surface coatings
- ▶ Flex
- ▶ Splice

5. Work pressure and application pressure

- ▶ Operator or pressure assisted
- ▶ Machine applied pressure
- ▶ Robotics
- ▶ Nominal pressure (force/area) is helpful
 - convention: nominal pressure = application pressure
- ▶ Qualitative pressure (low, medium, high) and relative pressure are important
- ▶ Used belts are the #1 source for determining pressure

Measuring performance

- ▶ You and your application knowledge; look at used belts
- ▶ Chatter mark/belt splice mark calculator
- ▶ Speed calculator formula



Factors Affecting Performance and Finish



Effect of grade on finish

Off hand on backstand with 45 shore plain contact wheel using stainless steel bars.

Ra finish – coated




| Effect of increasing | Life | Cut rate | Finish | Heat |
|----------------------------|------|----------|--------|------|
| Grade | ↑ | ↑ | ↑ | ↓ |
| Wear | ↔ | ↓ | ↓ | ↑ |
| Hardness of metal | ↓ | ↓ | ↓ | ↑ |
| Force | ↑ | ↑ | ↑ | ↓ * |
| Pressure | ↑ | ↑ | ↑ | ↓ * |
| Contact element hardness | ↑ | ↑ | ↑ | ↓ * |
| Contact element serrations | ↑ | ↑ | ↑ | ↓ * |
| Speed | ↑ | ↑ | ↓ | ↓ * |
| Power | ↑ | ↑ | ↔ | ↓ * |
| Air flow/pressure | ↑ | ↑ | ↔ | ↓ * |

* For the same amount of stock removal so that the heat is less due to the reduction in contact time.

Ra finish – Scotch-Brite™ belts



Ra finish – Trizact™

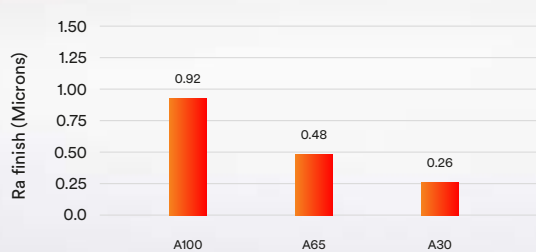

Ra finish – Trizact™ CF



3M Abrasives and Robotics

Optimise your automation with 3M abrasives

Automating parts of your operation can be a daunting task. Our experienced robotics experts can answer your questions, whether you're fine tuning an existing robotic application or just getting started.


3M abrasive belts, discs and wheels are ideally suited for robotic applications, and can help you increase productivity, consistency and cost savings.

Applications include:

- ▶ Gate removal/deflashing
- ▶ Weld grinding
- ▶ Deburring
- ▶ Finishing and polishing

We've worked across many industries— from foundries to metal fabrication shops— on various customer parts, such as turbine blades and orthopaedic implants.

- ▶ 3M has experienced application engineers with access to a global network of system integrators to help you with robot selection, proof of concept, training and more
- ▶ We have ten robotic labs in eight countries equipped with robots, end-of-arm tools and measurement tools are available for your process development and testing

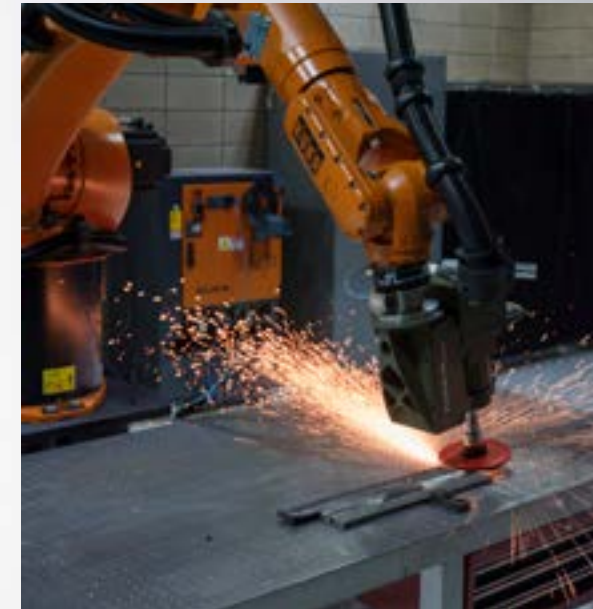

Reasons for robotics

Companies choose to automate for many reasons:

- ▶ Shrinking workforce
- ▶ Efficiency
- ▶ Consistency
- ▶ Productivity
- ▶ Long-term cost savings

3M has the expertise, connections and products to help you succeed.

Get started—contact your 3M sales professional or get in touch with one of our application engineers at [3M.co.uk/robotics](https://www.3m.co.uk/robotics)




3M™ Cubitron™ II Cloth Belt 984F



3M™ Cubitron™ II Cloth Belts 984F offer revolutionary performance with 3M Precision-Shaped Grain that slices clean through metal. Our 984F belts contain a grinding aid, making it ideal for medium to high pressure applications.

- ▶ Minimise operator fatigue as 3M Precision-Shaped Grain requires less grinding pressure
- ▶ Cool running temperature reduces risk of discolouration and heat related stress cracks
- ▶ 3M Precision-Shaped Grain fractures into self-sharpening points, cutting exceptionally fast and increasing productivity
- ▶ Belt life is increased, meaning more parts per belt for less belt changes
- ▶ Grade 36+, 50+, 60+, 80+, 120+
- ▶ Available in a range of sizes, details on request

3M™ Coated Belt Backing Guide

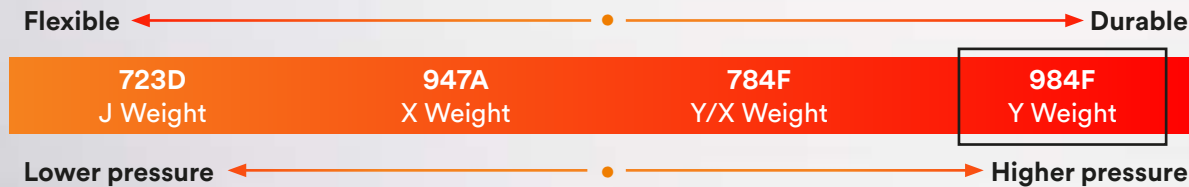

- Edge preparation/bevelling
- Weld grinding and stock removal

Product form: Belt
Mineral type: 3M Precision-Shaped Grain
Backing: Polyester cloth, YF Weight
Colour: Red
Bonding type: Resin
Flex type: Single-flex

Suggested applications

- ▶ Used to dimension metal sheets and coils or add grain pattern to stainless steel
- ▶ Sets grain in stainless steel, removes material and welds

[View product information tables](#)



3M™ Cubitron™ II Cloth Belt 784F



3M™ Cubitron™ II Cloth Belt 784F features 3M Precision-Shaped Grain. Our cloth belts are a precise mix of shaped ceramic and premium aluminium oxide. They have a flexible J Weight cotton backing and open coat construction. The belts also feature a waterproof backing and grinding aid.

- ▶ Consistent, faster results on medium pressure applications
- ▶ Conformable for grinding and blending both straight and contoured surfaces
- ▶ Grinding aid cools abrasive processes on heat-sensitive alloys
- ▶ Suitable for wet and dry applications on all metals
- ▶ Durable resin bond resists deterioration from heat, extending the life of the abrasive cloth
- ▶ Grade 36+, 50+, 60+, 80+, 120+, 150+, 180+
- ▶ For optimal durability and price value, YF Weight polyester backing is used for Grades 36+ – 80+, while lighter XF Weight polyester backing is used for grades 120+ – 180+
- ▶ Available in a range of sizes, details on request



- Deburring
- Edge preparation/bevelling
- Weld grinding and stock removal
- Refining

3M™ Coated Belt Backing Guide



[View product information tables](#)

Product form: Belt

Mineral type: 3M Precision-Shaped Grain and aluminium oxide

Backing material: Polyester cloth

Backing: XF Weight, YF Weight

Colour: Red

Flex type: Single-flex

Splice type: Fabri-Lok, Film-Lok

Suggested applications

- ▶ Use for medium pressure industrial applications




3M™ Cubitron™ II Cloth Belt 947A



3M™ Cubitron™ II Cloth Belt 947A features 3M Precision-Shaped Grain on a X Weight, poly-cotton backing. Our 947A belts are resin bonded for improved heat resistance and are recommended to be used dry. Use 3M™ Cubitron™ II Cloth Belt 947A for outstanding results on applications ranging from high-pressure, automated grinding to low and medium pressure offhand operations, on equipment such as backstands, file belt sanders, inline sanders and stroke sanders.

- ▶ 3M Precision-Shaped Grain cuts exceptionally fast, helping to increase productivity
- ▶ Requires less pressure, reducing operator fatigue
- ▶ Suitable for dry applications
- ▶ X Weight poly-cotton backing offers flexibility and durability on a range of applications
- ▶ Engineered to run cooler – protecting heat sensitive alloys from stress cracks and discolouration
- ▶ Lasts up to 4 times longer than conventional ceramic belts
- ▶ Resin bonded for improved heat resistance
- ▶ The abrasive produces a uniform finish over its life and helps eliminate burning during end-grain sanding applications.
- ▶ Grade 40+, 60+, 80+, 120+
- ▶ Available in a range of sizes, details on request

3M™ Coated Belt Backing Guide

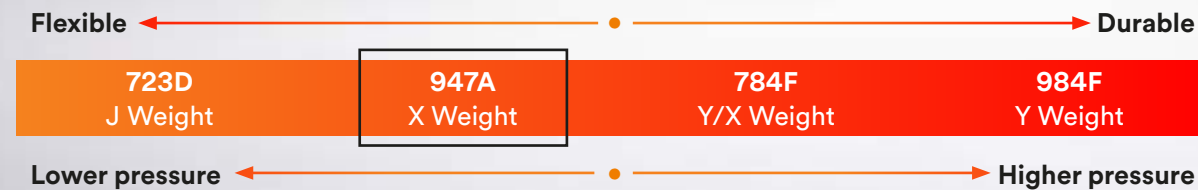

[View product information tables](#)



- Refining
- Fine finishing/pre-polish
- Surface preparation

Product form: Belt
Mineral type: 3M Precision-Shaped Grain
Backing: Cloth, X Weight
Bonding type: Resin
Flex type: Single-flex
Splice type: Fabri-Lok, Film-Lok

Suggested applications

- ▶ Optimised for medium/low pressure applications on stainless, mild steel and aluminium



3M™ Trizact™ Cloth Belt 337DC



A 3M™ Trizact™ abrasive belt on an X Weight backing used for medium pressure metal working: mill line removal, intermediate scratch refinement, consistent dimensioning, and consistent finishing applications.

- ▶ Excellent finish consistency
- ▶ Works well under medium pressure conditions
- ▶ Structured patterned abrasive
- ▶ Use dry
- ▶ Trizact™ abrasives can last up to five times longer than conventional abrasives

Use 3M™ Trizact™ Cloth Belt 337DC for consistent finishing in medium pressure metal working applications such as scratch refinement and dimensioning. Our belts feature macro-replicated abrasive on a flexible X Weight backing, fast cutting premium aluminium oxide mineral and a grinding aid. They are designed for dry use only.

Use 337DC belts for medium pressure metal work – such as mill line removal, intermediate scratch refinement, consistent dimensioning and consistent finishing applications.

Suggested applications

- ▶ Use for a consistent and fine finish in medium pressure metal working applications such as scratch refinement and light dimensioning applications



Product form: Belt

Mineral type: Aluminium oxide

Backing: Cloth, X Weight

Flex type: Full-flex

Splice type: Film-Lok

[View product information tables](#)



3M™ Trizact™ Belt 237AA



3M™ Trizact™ Cloth Belt 237AA uses proprietary microreplication technology where micron-graded aluminium oxide particles are formed into tiny pyramids of abrasive mineral and then coated on an X Weight cloth backing. As these pyramids wear, fresh, sharp mineral is continually exposed to produce a consistent cut and a predictable, fine finish.

- ▶ Self-sharpening pyramids start sharp, stay sharp, and run cooler than conventional abrasives
- ▶ Flexible backing for consistent finish over contours
- ▶ Ideal for intermediate finishing and fine polishing prior to plating or buffing
- ▶ Produces finer finishes than conventional electrostatically coated abrasives
- ▶ Grade A160 to A6

Use 3M™ Trizact™ Cloth Belt 237AA with fast cutting aluminium oxide, for consistent finishes on hard metals such as carbon and stainless steel. The durable backing to 237AA cloth belts help provide control, conformability and effective medium pressure grinding. The resin bonded abrasive gives greater heat resistance and helps prevent delamination. These belts use a film media splice – a strong secure bond that joins the belt ends and is made of a thin film-joining media that minimises chatter marks. This keeps the belt running smoothly and offer consistent finishing results.

Suggested applications

- ▶ Use for intermediate and final sanding of metal, solid and painted surfaces in addition to varnished surfaces and plastic parts



Fine finishing/pre-polish

Product form: Belt

Mineral type: Aluminium oxide

Backing: Cloth, X Weight

Bonding type: Resin

Flex type: Full-flex

Splice type: Film-Lok

[View product information tables](#)



3M™ Trizact™ Cloth Belt 307EA



The 3M™ Trizact™ Cloth Roll 307EA is an aluminum oxide 3M™ Trizact™ abrasive product constructed on a JE weight, flexible rayon cloth backing. Resin bonded for heat resistance. Features grinding aid for cooler grinding.

- ▶ 3M™ Trizact™ abrasives can last up to five times longer than conventional abrasives
- ▶ Flexible JE-weight backing enables the abrasive to follow surface contours
- ▶ Good for intermediate finishing and fine polishing prior to plating
- ▶ Grinding aid lowers operating temperature – reducing the risk for part discolouration
- ▶ Ideal for intermediate finishing and fine polishing prior to plating or buffing
- ▶ Rolls are fast and flexible for ad hoc use

From medical implants and surgical tools to automotive transmission components, 3M™ Trizact™ abrasives are uniquely suited for projects with acute technical requirements – delivering a consistent finish part after part.

Suggested applications

- ▶ Ideal for carbon steel, titanium, cobalt chrome, stainless steel and other high nickel alloys



- Intermediate finishing
- Fine polishing prior to plating or buffing

Product form: Belt

Mineral type: Aluminium oxide

Backing: Cloth, JE Weight

Bonding type: Resin

Flex type: Full-flex

Splice type: Film-Lok

[View product information tables](#)



3M™ Trizact™ Cloth Belt 217EA



3M™ Trizact™ Cloth Belt 217EA uses our proprietary microreplication technology where micron-graded aluminium oxide particles are formed into tiny pyramids of abrasive mineral and then coated on a J Weight rayon backing. As these pyramids wear, fresh, sharp mineral is continually exposed to produce a consistent cut and a predictable, fine finish.

- ▶ Flexible J Weight backing flows over contoured surfaces for consistent finishing
- ▶ Produces finer finishes than conventional electrostatically coated abrasives
- ▶ Ideal for light pressure applications – allows abrasive to break down and maintain cut and produce consistent finishes
- ▶ Produces finer finishes than conventional electrostatically coated abrasives

Suggested applications

- ▶ For intermediate finishing and fine polishing prior to plating or buffing
- ▶ Ideal for light pressure applications
- ▶ Use 3M™ Trizact™ Cloth Belt 217EA to provide consistent finishes on hard metals such as carbon and stainless steel



Fine finishing/pre-polish

Product form: Belt

Mineral type: Aluminium oxide

Backing: Cloth, J Weight

Bonding type: Resin

Flex type: Full-flex

[View product information tables](#)



Scotch-Brite™ Durable Flex File Belt DF-BL



Scotch-Brite™ Durable Flex Belt is engineered to perform tough detail work such as deburring, blending, and finishing, on a variety of metals. The reinforced, low-stretch backing and superior edge durability aid in supplying an aggressive cutting ability.

- ▶ Tough, non-woven belt is effective for deburring, blending and cleaning and is load resistant
- ▶ Higher flexibility resists “chunking” and performs well on belt sanders with small contact wheels
- ▶ Low-stretch backing provides aggressive conditioning capability
- ▶ Provides controlled cut to eliminate gouging and leaves a burr free finish
- ▶ Offers the best flexibility in the Scotch-Brite™ Surface Conditioning Belt family
- ▶ Grades: A CRS/A MED/A FN
- ▶ Available in a range of sizes and grades, details on request



- Deburring
- Blending/satin finishing
- Cleaning

Product form: Belt

Mineral type: Aluminium oxide

Backing: Low stretch

Bonding type: Resin

Colour: Brown/maroon/green

Suggested applications

- ▶ Use for cleaning, finishing, blending and deburring particularly on file belt sanders
- ▶ For a wide range of applications and materials
- ▶ Suitable for use on carbon steel, stainless steel, carbon, titanium and nickel alloys

[View product information tables](#)



Scotch-Brite™ Surface Conditioning Low Stretch Belt SC-BL



A non-woven belt used for cleaning, finishing, blending and deburring applications. The firm, stretch-resistant backing is suited for high belt tensions.

Scotch-Brite™ Surface Conditioning Low Stretch belts are engineered with aluminium oxide and silicon carbide minerals. Our finer grades provide finer finishes, while medium or coarse grades provide coarser finishes. Our belts are designed for use in low stretch applications, when a standard scrim belt is stretching on the machine, or when less conformability is desired. They are resistant to wear and sharp edges and are useful in a variety of industries, from transport to metal fabrication.

- ▶ Provides beautiful and consistent finish
- ▶ Long life
- ▶ Resists loading
- ▶ Very forgiving
- ▶ Low-stretch reinforced backing keeps the abrasive side taut and firm as it abrades the surface
- ▶ Stretch-resistant backing
- ▶ Grades: A CRS/A MED/A VFN/S SFN



- Deburring
- Blending/satin finishing
- Cleaning

Product form: Belt

Mineral type: Aluminium oxide, silicon carbide

Backing: Low stretch

Suggested applications

- ▶ Use for cleaning, finishing, blending and deburring particularly on Backstands
- ▶ For a wide range of applications and materials
- ▶ Apply to steel, stainless steel, carbon, titanium and nickel alloys
- ▶ Suitable for use on aluminium, copper, brass and soft non-ferrous metals

[View product information tables](#)




Scotch-Brite™ Surface Conditioning Scrim Backed Belt SC-BS



Scotch-Brite™ SC Surface Conditioning Belt is a durable belt engineered to perform detail work such as blending, blending corners, cleaning, contour finishing, deburring, deburring edges, fine finishing, flat finishing, setting the grain, stainless steel finishing, and attaining straight line brushed finishes on a variety of metals.

- ▶ Non-woven, surface conditioning belts clean, blend, deburr and finish
- ▶ Reduced loading and heat build-up allow extended operating time and consistent surface conditioning results
- ▶ Reinforced backing and non-woven open web material provides superior flexibility for detail work, over contours and edges
- ▶ Removes surface imperfections, grindlines, mill, and other marks
- ▶ Grades: AMED/ACRS/AVFN/SSFN/SVFN/TYPT
- ▶ Available in a range of sizes and grades, details on request

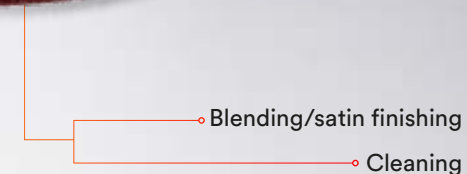

Product form: Belt

Mineral type: Aluminium oxide, silicon carbide, talc

Backing: Scrim

Suggested applications

- ▶ Use for cleaning, finishing, blending and deburring particularly on backstands
- ▶ For a wide range of applications and materials
- ▶ Apply to steel, stainless steel, carbon, titanium and nickel alloys
- ▶ Suitable for use on aluminium, copper, brass and soft non-ferrous metals

TOP TIPS



Why will it win against coated abrasive belts?

- ▶ Produces more consistent results reducing part to part variation
- ▶ Won't gouge surface, reducing rejects and deskill the job
- ▶ Leaves a better surface finish resulting in improved part appearance

[View product information tables](#)

File Belt Accessory Information



3M™ Standard Arm – 13 mm x 457 mm

3M™ File Belt Sander Arm, Corners Style 2 Size, 3/6/13 mm x 457 mm

- ▶ 3M™ File Belt Sander can be optimised by adding attachment arms, extensions, and tool kits
- ▶ Robust design for a long product life
- ▶ Different designs to work on nearly all kind of small areas
- ▶ Optimise 3M™ File Belt Sander with the 3M™ File Belt Sander Attachment Arms. Our attachment arms, extensions, and tool kits will enhance your product due to their robust design. The different designs work on nearly all kind of small areas

Suggested applications

- ▶ Use with 3M™ File Belt Sander to work on nearly all kind of small areas



[View product information tables](#)

For more product information and product ordering information please go the **Abrasive Belts** section.

Random Orbital Sander



Random Orbital Sander



- ▶ Engineered to work hand-in-hand with 3M™ abrasives and accessories, the 3M™ Random Orbital Sanders provide the power and performance to get the job done with even better results
- ▶ 3M™ sanders deliver professional, dust-free performance along with a swirl-free finish, hour after hour, in high-production industrial environments where dust extraction is required
- ▶ Precision balanced steel workings and powerful air driven motors run smoothly with less vibration
- ▶ Improved durability, ergonomics and noise levels maximise comfort and control for prolonged use
- ▶ Aluminium body and durable composite cover reduce cracked housings and downtime

Machine information

- ▶ Air powered
- ▶ Available in central vacuum and self generated vacuum
- ▶ Available in 2.5mm orbit for fine finishing, 5mm for general purpose sanding and 8mm for aggressive sanding

| | Central vacuum | Self-generated vacuum |
|----------|----------------|-----------------------|
| RPM | 12000 | 12000 |
| Motor HP | 0.28 | 0.28 |



New simplified paddle design
Orbit identification is shown by numbers



Random Orbital Sander



What is it used for?

- ▶ Blending/satin finishing
- ▶ Surface preparation
- ▶ Fine finishing/pre-polish
- ▶ Paint denibbing
- ▶ Refining

What segment is it used in?

- ▶ Transportation
- ▶ Metal fabrication
- ▶ Woodworking
- ▶ DIY/paint trades/IPS
- ▶ Shop fitters, kitchen fitters and retail outlets

Basic ROS techniques

1. Start the tool ON the surface; stop the tool OFF the surface
2. Run the tool flat on work piece (no tipping on edge)
3. Light operator hand pressure (let the tool do the work)
4. North, south, east, west sanding pattern for a uniform, quality finish

Troubleshooting checklist

- ▶ Check for correct PSI and RPM
- ▶ Check air line length, leaks, fitting and inside diameter
- ▶ Check tool lubrication schedule
- ▶ Look for worn bearings
- ▶ Look for damaged disc pad
- ▶ Are the tool and disc pad diameter the same?
- ▶ Is the lever damaged or the muffler clogged?
- ▶ Is the speed control adjuster turned down?



Tool Features

Coming soon in 2022



3M Xtract™ Pneumatic Random Orbital Sander



- 1 Aluminium housing for added durability and reduced vibration; Durable composite coverhels prevent cracked housings
- 2 Recessed Lever eliminates pinch points
- 3 Extended cover with 3M™ Gripping Material allows better control with reduced effort, insulates from cold and reduces vibration
- 4 Safer Thumb Wheel mounted speed control reduces inadvertent speed changes
- 5 Wider port for more efficient dust capture
- 6 Internal Muffler results in less breakage, SGV 6 dB quieter
- 7 Integrated Wrist Support for comfort and leverage
- 8 Clearance for large inlet coupler
- 9 Centre Mount Exhaust for more finger room, better dust collection airflow
- 10 Improved Self Generated Vacuum for more efficient dust extraction – designed to work with 3M Xtract™ Discs

3M Xtract™ Electric Random Orbital Sander Central Vacuum



- 1 Aluminium housing for added durability and reduced vibration; Durable composite coverhels prevent cracked housings
- 2 Recessed Lever eliminates pinch points
- 3 Extended cover with 3M™ Gripping Material allows better control with reduced effort, insulates from cold and reduces vibration
- 4 LED indicator for visual confirmation of power and speed setting
- 5 Wider port for more efficient dust capture
- 6 Internal Muffler results in less breakage
- 7 Integrated Wrist Support for comfort and leverage
- 8 Brushless motor with integral internal cooling for more efficient running, long life, less maintenance, better heat dispersion, better speed control
- 9 Centre Mount Exhaust for more finger room, better dust collection airflow
- 10 Optimised for use with 3M Precision-Shaped Grain, which enhances performance
- 11 4.7m (15.4ft) cord length, matched to the hose length of the 3M Xtract™ Portable Dust Extractor

Random Orbital Sander



Application guide

| Application | Substrate | Option 1 | Option 2 | Option 3 |
|---------------------------|--------------------|--|---|--|
| Refining | Mild/carbon steel | 3M Xtract™ Cubitron™ II Film Disc 775L | 3M™ Cubitron™ II Paper Disc 950U 60+ or 80+ or 120+ | 3M™ Cubitron™ II Cloth Disc 947A 60+ or 80+ or 120+ |
| | Stainless steel | 80+ or 120+ | | |
| | Non ferrous metals | 3M Xtract™ Film Disc 775L 150+ or 180+ | 3M™ Cubitron™ II Paper Disc 950U 150+ or 180+ | 3M™ Cubitron™ II Cloth Disc 947A 80+ or 120+ |
| Blending/satin finishing | Mild/carbon steel | Scotch-Brite™ Cut and Polish Hookit™ Disc CP-HA AMED | Scotch-Brite™ Production Hookit™ Disc PR-HA AVFN | 3M Xtract™ Cubitron II™ Net Disc 710W 240+ or 320+ |
| | Stainless steel | | | |
| | Non ferrous metals | | | |
| Fine finishing/pre-polish | Mild/carbon steel | 3M Xtract™ Cubitron II™ Net Disc 710W 180+ or 240+ | 3M Xtract™ Cubitron™ II Film Disc 775L 240+ or 320+ | 3M™ Film Disc 360L P600, P800, P1000, P1200, P1500 |
| | Stainless steel | | | |
| | Non ferrous metals | 3M Xtract™ Cubitron II™ Net Disc 710W 240+ or 320+ | 3M Xtract™ Cubitron™ II Film Disc 775L 320+ or 400+ | |
| Surface preparation | Mild/carbon steel | 3M Xtract™ Cubitron™ II Film Disc 775L | 3M™ Cubitron™ II Paper Disc 950U 60+ 80+ 120+ | Scotch-Brite™ Cut and Polish Hookit™ Disc CP-HA AMED |
| | Stainless steel | 80+ or 120+ | | |
| | Non ferrous metals | 3M Xtract™ Cubitron™ II Film Disc 775L 120+ or 240+ | | |
| Paint stripping | Mild/carbon steel | 3M Xtract™ Cubitron II™ Net Disc 710W | 3M Xtract™ Cubitron™ II Film Disc 775L 80+ or 120+ | 3M™ Cubitron™ II Paper Disc 950U 80+ or 120+ |
| | Stainless steel | 80+ or 120+ | | |
| | Non ferrous metals | 3M Xtract™ Cubitron II™ Net Disc 710W 120+ or 150+ | 3M Xtract™ Cubitron™ II Film Disc 775L 120+ or 150+ | 3M™ Cubitron™ II Paper Disc 950U 120+ or 150+ |

[View product information tables](#)

Factors Affecting the Perfect Finish



Air basics

To optimise compressed air output and delivery:

- ▶ 90 psi under load — use your gauge
- ▶ 10mm minimum air line inside diameter
- ▶ Use minimum length of air line hose necessary; no more than 8m
- ▶ High flow air fittings:
 - 3/16" marginal
 - 7/32" better
 - 9/32" best
- ▶ Observe compressed air demand throughout the plant
- ▶ Maximum working air pressure: 6.2 bar (90 psi)

Lubricant recommendation for air-powered tools

- ▶ 3M recommends to lubricate the tool on a regular basis, put 2 to 3 drops of suitable pneumatic motor lubricating oil into the hose end (inlet) of the tool. Reconnect tool to the air supply and run tool slowly for a few seconds to allow air to circulate the oil. If the tool is used frequently, lubricate it on a daily basis or lubricate it if the tool starts to slow or lose power

Technical recommendations for 3M™ air-powered tools

- ▶ Use a clean, dry, lubricated air supply that will give a measured air pressure at the tool of 6.2 bar (90 psi) when the tool is running with the lever fully depressed
NOTE: tools can be run at lower pressures, **but should never be run higher than 6.2 bar (90 psi)**. If run at a lower pressure, the performance of the tool is reduced
- ▶ Use an approved 10mm x 8m (3/8" x 25 ft.) or 13mm x 8m (1/2" x 25 ft.) maximum length air line
- ▶ Connect the tool to the air supply
- ▶ It is strongly recommended that an air filter, regulator and lubricator (FRL) is used to supply clean, lubricated air at the correct pressure to the tool. If such equipment is not used, the tool should be lubricated manually



Product Information

Key products



**3M Xtract™ Cubitron™ II
Net Disc 710W**



**3M Xtract™
Net Disc 310W**



**3M Xtract™ Cubitron™ II
Film Disc 775L**



**3M™ Cubitron™ II Hookit™
Paper Disc 950U**



**3M™ Cubitron™ II Hookit™
Cloth Disc 947A**



**Scotch-Brite™ Hookit™
Cut and Polish Disc CP-HA**




**Scotch-Brite™ Hookit™
Production Disc PR-HA**



3M™ Film Disc 375L



3M Xtract™ Film Disc 360L

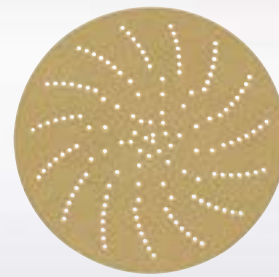

3M Xtract™ Paper Disc 236U

[View product information tables](#)



3M Xtract™ Cubitron™ II Net Disc 710W



Dust extraction meets industry-leading cut-rate in 3M Xtract™ Cubitron™ II Net Disc 710W. This premium sanding disc features a unique abrasive pattern on a net backing that allows for virtually dust-free sanding, with legendary 3M Precision-Shaped Grain technology. You'll finish more parts per disc with less dust in the environment, boosting productivity without sacrificing worker health.

- ▶ Premium net disc allows for virtually dust-free sanding
- ▶ 3M Precision-Shaped Grain arranged in a unique pattern delivers industry-leading cut-rate and long life
- ▶ Part of the 3M Xtract™ Series, the ultimate in dust removal and performance
- ▶ Allows for a cleaner work environment than traditional discs with dust extraction holes
- ▶ Hook-and-loop backing for quick and easy disc changes
- ▶ Ideal for a wide variety of substrates and applications including stock removal and fine finishing
- ▶ Available in a range of grades from 80+ to 320+

Suggested applications

- ▶ Ideal for a range of applications focused on stock removal and are effective on a wide variety of substrates – including metals, composites, gelcoat, whitewood and wood



- Refining
- Stock removal
- Fine finishing/pre-polish
- Surface preparation
- Paint de-nibbing

Product form: Disc

Mineral type: 3M Precision-Shaped Grain

Backing: Net

Colour: Purple

[View product information tables](#)

Increase worker safety with Cubitron™ II

Using 3M Xtract™ Cubitron™ II Net Disc 710W can help to:

- ▶ Minimise hand-arm vibration with faster removal rates resulting in reduced trigger time
- ▶ Reduce airborne particles released into the workplace
- ▶ Reduce noise exposure by completing the task quicker

**SAFETY
BUILT IN**



3M Xtract™ Net Disc 310W



3M Xtract™ Net Disc 310W is designed to deliver an unbeatable combination of performance and value. Powered by innovative 3M technologies and technical expertise, 310W disc helps you stay competitive in your industry.

- ▶ Advanced Series net disc delivers virtually dust-free sanding at a value price
- ▶ Features 3M Precision-Shaped Grain mixed with premium aluminum oxide abrasive for a fast cut and long life
- ▶ Hook-and-loop backing for quick and easy disc changes
- ▶ Ideal for a wide variety of substrates and applications including stock removal and fine finishing
- ▶ Available in a range of grades from 80+ to 320+

Suggested applications


- ▶ Ideal for a range of applications focused on stock removal and are effective on a wide variety of substrates – including metals, composites, gelcoat, whitewood and wood

Product form: Disc

Mineral type: 3M Precision-Shaped Grain

Backing: Net

Colour: Blue

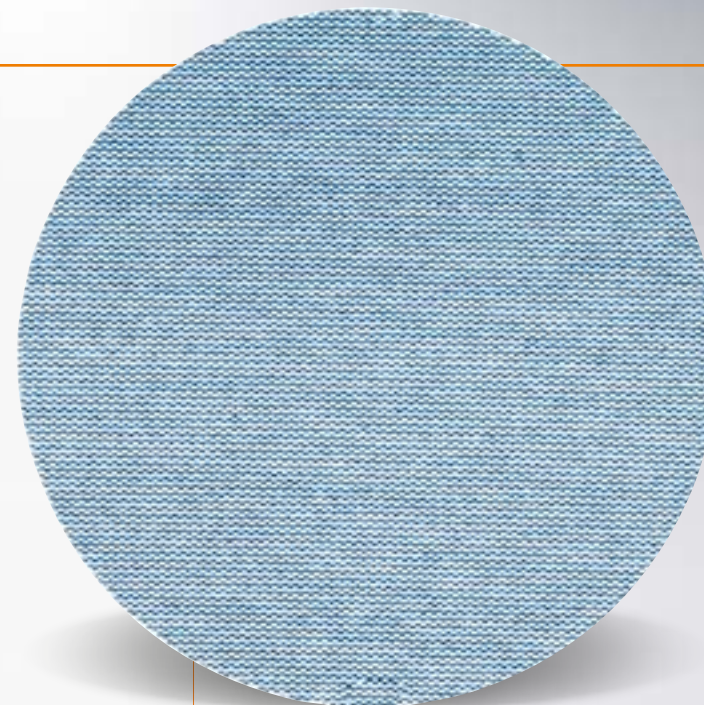

- Refining
- Stock removal
- Fine finishing/pre-polish
- Surface preparation
- Paint de-nibbing

[View product information tables](#)



3M Xtract™ Cubitron™ II Film Disc 775L



- ▶ 3M Xtract™ Cubitron™ II Film Disc 775L features 3M Precision-Shaped Grain a revolutionary advancement in abrasive technology. Our film discs can cut up to twice as fast and last up to six times as long as normal abrasives
- ▶ Film backing provides greater tear resistance and edge retention
- ▶ Available in grades 80+ 120+ 150+ 180+ 220+ 240+ 320+ 400+
- ▶ Ideal for a variety of applications focused primarily hook and loop attachment gives fast and easy disc changes

Suggested applications

- ▶ Ideal for a range of applications focused on stock removal and are effective on a wide variety of substrates – including metals, composites, gelcoat and whitewood

Increase worker safety with Cubitron™ II

Using 3M™ Cubitron™ II Hookit™ Film Disc 775L can help to:

- ▶ Minimise hand-arm vibration with faster removal rates resulting in reduced trigger time
- ▶ Reduce airborne particles released into the workplace
- ▶ Reduce noise exposure by completing the task quicker

SAFETY
BUILT IN

Product form: Disc

Mineral type: 3M Precision-Shaped Grain

Backing: Film

Colour: Purple



○ Refining

○ Fine finishing/pre-polish

○ Surface preparation

○ Paint de-nibbing

[View product information tables](#)



3M™ Cubitron™ II Hookit™ Paper Disc 950U



- Surface preparation
- Refining
- Paint stripping
- Paint de-nibbing



- ▶ Available in grades 60+, 80+, 120+, 150+, 180+
- ▶ Intended for use on flat surfaces, 950U discs feature an open coat construction that reduces loading and clogging – without the use of stearates, to reduce the risk of finish contamination
- ▶ Combined with 3M Precision-Shaped Grain technology, this gives you a fast-cutting disc that keeps on going – long after conventional abrasives have called it quits
- ▶ Hook and loop attachment gives fast and easy disc changes

Suggested applications

The new 3M™ Cubitron™ II Hookit™ Paper Discs 950U are the ideal solution for removing paint, coatings and mill scale from galvanised steel, aluminium, fibreglass and other substrates that are prone to abrasive loading.

Mineral type: 3M Precision-Shaped Grain

Backing: E-Weight paper

Coating: Open, non-stearate

Bond: Resin

[View product information tables](#)

3M™ Cubitron™ II Hookit™ Cloth Disc 947A



- Surface preparation
- Refining
- Paint stripping
- Leveling



- ▶ Available in grades 40+ 60+ 80+ 120+
- ▶ The 947A's X-Weight poly-cotton backing delivers outstanding tear resistance, flexibility, and a consistent, uniform finish
- ▶ Convenient Hookit™ discs are ideal for high volume, quick change operations

Suggested applications

Grades 40+ and 60+ can be used for many specialised construction applications, such as shaping and dimensioning fibreglass architectural elements.

Grades 80+ and 120+ are ideal for levelling and blending the metal surface especially in automotive ‘body-in-white’ applications.

Mineral type: 3M Precision-Shaped Grain

Backing: X-Weight cloth

Colour: Brown

TOP TIPS



Use for heavy weld spatter, laser cut or heavily burred edges.

[View product information tables](#)



Scotch-Brite™ Hookit™ Cut and Polish Disc CP-HA A MED



Blending/satin finishing

Surface preparation



- ▶ Excellent for aggressive blending and finishing
- ▶ 3M™ Hookit™ quick change attachment and removal system provides fast disc change-out for multi-step finishing processes
- ▶ Ideal for aggressive blending and finishing
- ▶ Medium grade, tan disc is made with aluminium oxide
- ▶ Load and heat resistance allows for prolonged operation and consistent cutting action throughout the life of the disc
- ▶ Scotch-Brite™ Hookit™ Cut and Polish Discs are constructed of tough, tight, and dense web for long life and durability. Excellent for aggressive blending and finishing

Suggested applications

Due to its fast cut-rate, hardness and strength, it is widely used in blending, sanding and finishing applications. Aluminium oxide is suitable for a wide variety of materials in both woodworking and metalworking, including ferrous alloys.

Product form: Disc

Mineral type: Aluminium oxide

Fixing system: Hookit™

Colour: Tan

[View product information tables](#)

Scotch-Brite™ Hookit™ Production Disc PR-HA A VFN



Blending/satin finishing



- ▶ High cut-rate provides fine finishing, blending, polishing, paint prepping, and scuffing on a wide variety of surfaces
- ▶ 3M™ Hookit™ quick change attachment and removal system provides fast disc change-out for multi-step finishing processes
- ▶ Provides proper finish for scuffing primer, metal, and solid surfaces
- ▶ Non-woven 3D structure provides long life and consistent finishes

Suggested applications

Scotch-Brite™ Hookit™ Production Clean and Finish Disc delivers high cut, long life, a fine finish, and is effective for conditioning aluminium, stainless steel, plastics, wood, and fibreglass. The disc is designed for fine finishing, paint prepping, and scratch blending, and conforms well to irregular surfaces for a clean, consistent finish without undercutting or damaging the base material.

Product form: Disc

Mineral type: Aluminium oxide

Backing: Hookit™

Colour: Maroon

[View product information tables](#)



3M™ Film Disc 375L



Fine finishing/pre-polish



- ▶ This disc features a high performance aluminium oxide which combined with a durable film backing and load resistant coating, makes this a great all round sanding disc

Suggested applications

Apply to a wide variety of materials in both woodworking and metalworking, including ferrous alloys.

Use with a random orbital sander and 3M™ Hookit™ backup pad (sold separately).

Mineral type: Aluminium oxide

Backing: Film

Colour: Brown – White

[View product information tables](#)

3M Xtract™ Film Disc 360L



Sanding / finishing



The 3M Xtract™ Film Disc 360L features an aluminum oxide abrasive grain on a film backing for effective fine sanding on plastics, gel coats and polyurethane solid surface substrates. The sturdy film backing gives the durability needed for a high-production environment, and its excellent resistance to edge tearing provides longer life over discs with standard A-weight paper backings.

Suggested applications

Aluminum oxide is suitable for a wide variety of materials in both woodworking and metalworking, including ferrous alloys. The film backing gives you a close-tolerance, consistent finish, making it a good choice for applications such as spot repairs, sanding plastic parts, paint feathering on defects, or sanding automotive primer.

Use with a random orbital sander and 3M™ backup pad (sold separately).

Mineral type: Aluminium oxide

Backing: Film

Colour: Purple

[View product information tables](#)



3M Xtract™ Paper Disc 236U



○ Sanding / finishing



The 3M Xtract™ Paper Disc 236U offers aggressive cut and long life on a premium aluminium oxide disc with a durable edge. Strong C-weight paper backing resists tearing during aggressive sanding and the disc is resin-bonded for heat-resistance, further increasing life and cut.

Suggested applications

Aluminum oxide is suitable for a wide variety of materials in both woodworking and metalworking. This disc can be used for applications such as surface finishing, and refining, pre-coating preparation, pre-primer, gel coats, wood sanding and for high quality composite (i.e. corian) finish.

Use with a random orbital sander and 3M™ backup pad (sold separately).

Mineral type: Aluminium oxide

Backing: Paper

Colour: Brown

[View product information tables](#)

Accessory Information




3M™ Hookit™ Low Profile Clean Sanding Back-Up Pad



- ▶ For use with Hookit™ Clean Sanding discs
- ▶ Aluminium oxide mineral is fast cutting, contributing to better throughput and increased productivity
- ▶ Ideal for efficient flat sanding and especially aggressive operations – when good levelling is needed, use pads with coarser grades
- ▶ Our versatile disc pads are strong yet flexible, made from firm density foam with a 35° blunt tapered edge, giving them added durability
- ▶ Designed to eliminate the need for hole alignment, these disc pads feature our multi-hole pattern that works with a vacuum to help remove dust from the disc, workpiece and surrounding air

[View product information tables](#)

3M™ Hookit™ Low Profile Back-Up Pad

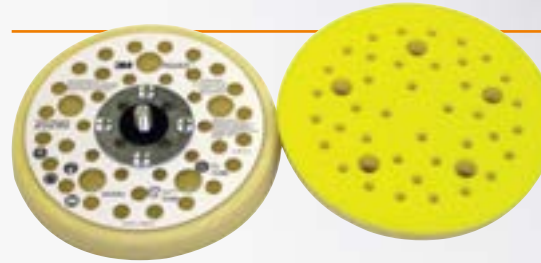

- ▶ Low profile soft density yellow pad provides flexibility to reduce loading
- ▶ 15 degree tapered edge is ideal for final finishing on flat or contoured surfaces
- ▶ 3M™ Hookit™ attachment provides excellent backing support and easy reuse, optimising disc life
- ▶ Use in applications using fine grade abrasives (grade 220 and finer). Use with coarse grade abrasives may cause premature foam failure

[View product information tables](#)

Accessory information



3M™ Hookit™ D/F Disc Back-Up Pad



- ▶ J hooks securely hold a 3M™ Hookit™ disc or 3M™ Finesse-it™ buffing pad
- ▶ For use with a random orbital sander, rotary sander, or right angle grinder
- ▶ 3M™ Hookit™ system provides easy removal and re-use
- ▶ 45 degree tapered edge provides some flexibility for feather-edging and blending
- ▶ 82659, 5 in x 3/4 in 5/16-24 External 5 Holes

[View product information tables](#)

Tool and Abrasive Safety



Abrasive Hazards

SAFETY
BUILT IN

Choosing the right abrasive

An important factor that is often overlooked when assessing engineering and administrative controls is the selection of the abrasive products, ensuring the most appropriate abrasive product and abrasive mineral have been selected to help reduce the risks from hand-arm vibration, airborne particles and noise.

Although these controls will not eliminate the need to use the appropriate PPE, they play a vital role in reducing risk and keeping the workplace safe.

Hand-arm vibration



The risk of vibration-related injury is associated with tasks that require excessive bending of the wrists or time spent holding hand-held machinery.

Suggestions to help control the risks:

- ▶ Reduce the vibration transmitted to the hand
- ▶ Reduce the time spent holding vibrating equipment or work pieces
- ▶ Choose the right tools and abrasives for the application

Airborne particles



Airborne particulate matter generated by activities such as cutting, grinding, sanding of organic and inorganic matter such as minerals, metal, paint etc.

Suggestions to help control the risks:

- ▶ Remove or reduce the exposure
- ▶ Use dust extraction units
- ▶ Choose the correct abrasives for the application
- ▶ Wear the appropriate PPE

Noise



Noise is normally defined as unwanted sound and is one of the most common health hazards.

Suggestions to help control the risks:

- ▶ The amount of time you listen to a sound affects how much damage it will cause
- ▶ The quieter the sound, the longer you can listen to it safely
- ▶ Choose the right tools and abrasives for the application
- ▶ The appropriate PPE must be worn when exposed to noise levels from 85dB and above

Cuts and other injuries



Injury can be caused by direct bodily contact with rotating surfaces, leading to cuts and burns to the operator and workers in the immediate vicinity.


Suggestions to help control the risks:

- ▶ Ensuring that each tool and consumable is safe and fit for purpose
- ▶ Choose the right tools and abrasives for the application
- ▶ Wear the appropriate PPE

For more information go to www.3M.co.uk/safetybuiltin

Using Abrasives Safely

PPE guide

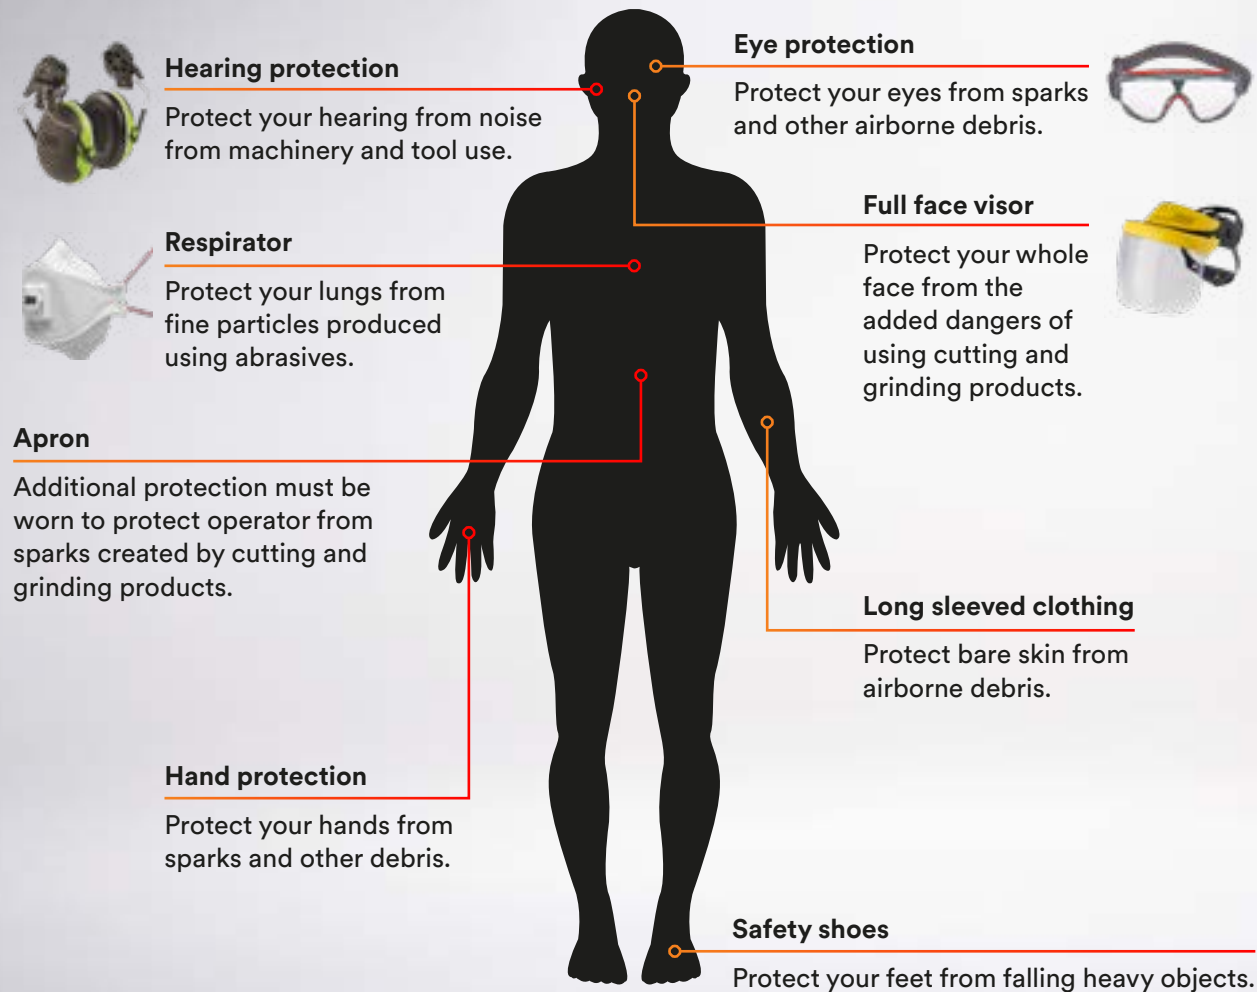

Stay safe on the job with 3M™ Personal Protective Equipment*

3M™ Headgear G500

The 3M™ Headgear G500 provides a versatile and comfortable solution for wearers who require both face and hearing protection.

3M™ PELTOR™ X4 Ear Defender Helmet Mounted

The 3M™ PELTOR™ X4 Ear Defenders are designed to offer protection against high noise levels, whilst maintaining a sleek, low profile, aesthetically pleasing design.

3M™ GoggleGear™ 500 Series

The 3M™ GoggleGear™ 500-Series is a low-profile design with an adjustable strap and indirect ventilation. These splash goggles with 3M™ Scotchgard™ Anti-Fog Coating help keep lenses clear in, steamy and wet environments.

3M™ Aura™ 9332+ Valved Respirator

A 3 panel flat fold design allows workers to move and speak more freely and provides an effective filtration of hazardous particles.

3M™ E-A-R™ UltraFit™ Earplugs

Flexible tri-flange design conforms to most ear canals. Soft and durable material improves comfort and wearability. No need to handle the plug tip making them more hygienically acceptable.

**Please read and follow all 3M instruction for proper use.*

For more information go to www.3M.co.uk/safetybuiltin

Using Abrasives

The tool

- ▶ Check power cable or air line
- ▶ Check stop/start switch works
- ▶ Does it run and sound smooth?
- ▶ Is the handle securely fitted?

The guard

- ▶ Check it's present
- ▶ Check it's in the right position
- ▶ Check it's secure
- ▶ Check for debris and remove

The method S-C-A-R-T

- ▶ **Sparks:** Check immediate surroundings for anything flammable
- ▶ **Communicate:** Tell others nearby you're about to start abrasive use
- ▶ **Abrasive selection:** Use the appropriate abrasives for the job
- ▶ **Rotation:** Minimise extended stress postures and vibration exposure
- ▶ **Tool angle:** Ensure angle of tool when in use is correct

The abrasive

- ▶ Are you trained to change?
- ▶ Check for defects and damage
- ▶ Check the date (see right)
- ▶ Check the substrate compatibility

Ensure the wheel has the EN mark and check the wheel expiry date:



| Code | Quarter |
|------|--------------------|
| V 01 | January – March |
| V 02 | April – June |
| V 03 | July – September |
| V 04 | October – December |

For more information go to www.3M.co.uk/safetybuiltin

Using Abrasives

What do the symbols on your disc mean?

EN 12413
declaration of conformity

Suitable for use on mild steel

Suitable for use on stainless steel

Wear appropriate hearing protection

Wear an apron designed to protect from sparks

Wear appropriate safety glasses

Wear gloves that protect from sparks

Wear appropriate respiratory protection

Wear protective visor in place of safety glasses

Do not use if damaged

Do not use the product on its face to grind substrate

Do not use water with the product - not suitable for wet grinding

Do not use different sized top and bottom flanges

3M bonded and coated abrasives are recognised with the oSa certification. Being certified with the oSa trademark means the highest level of tested safety of abrasives with EN standards compliance.

Using Abrasives

Safety first



Read safety insert before mounting or using product

Wear proper personal protective equipment

Always wear proper PPE as identified by your risk assessment to help protect against dust, grinding sparks and debris, noise and some wheel fragments.



- ▶ Full face shield
- ▶ Impact resistant protective eyewear marked as ANSI Z87.1 conformant



- ▶ Hearing protection
- ▶ NIOSH approved respirator

Safe operating procedures



Broken wheel hazard

Follow these precautions to reduce the risk of injury or death from a wheel breaking.



Tool selection:

1. Use only on tools designed for grinding wheels.
2. Check tool RPM rating. Never use a tool that runs faster than the max. Exceeding the wheel's maximum RPM can cause it to break apart.
3. Use only with proper guard. The guard helps direct fragments away from you if the wheel breaks.
4. Use only with flanges which are clean, matching and at least 1/3 of the wheel's diameter.



Mounting:

1. Inspect the wheel. Never use damaged wheels. Replace if damaged (e.g. cracks or chips).
2. Follow tool manufacturer's mounting instructions.
3. Never force wheel onto tool spindle or alter wheel centre hole size. Do not alter wheel in any way.
4. Use correct attachment system. Tighten nut only enough to firmly hold wheel. Ensure full 3 thread contact with spindle.

Follow good cutting practices:

- ▶ Secure workpiece
- ▶ Keep all body parts and objects clear of cutting path
- ▶ Only cut with edge of wheel
- ▶ Begin cutting by gradually engaging work piece
- ▶ Never bump or force wheel so that tool motor slows or stalls
- ▶ Make only straight cuts. Never twist or bend wheel
- ▶ Direct sparks away from face and body

Refer to ANSI B7.1 or EN 12413 for complete safety information.

For more information go to www.3M.co.uk/safetybuiltin

Links to Further Reading:

Health and Safety Executive

www.hse.gov.uk

British Abrasives Federation (BAF)

www.thebaf.org.uk

Federation of European Producers of Abrasives (FEPA)

www.fepa-abrasives.com

Organization for the Safety of Abrasives

www.osa-abrasives.org/

Institute of Local Exhaust Ventilation Engineers (ILEVE)

www.cibse.org/Institute-of-Local-Exhaust-Ventilation-Engineers-I

Industrial Noise Control:

www.industrialnoisecontrol.com/inc-library/noise-control-faqs

Hierarchy of Controls – National Institute
for Occupational Safety and Health

www.cdc.gov/NIOSH

For further formation on the independent test data carried out by the Fraunhofer Institute and the Flemish Institute for Technological Research (VITO), please contact us: abrasives.uk@mmm.com

Product Reference – For Right Angle Grinder

3M™ Cubitron™ II Cut-Off Wheel

| Stock ID (code) | Diameter | Thickness | Centre hole | Type | Case units | MOQ |
|-----------------|----------|-----------|-------------|------|------------|-----|
| 7100032406 | 75 mm | 1 mm | 9.53 mm | N/A | N/A | 6 |
| 7100032583 | 75 mm | 1.6 mm | 9.53 mm | N/A | N/A | 6 |
| 7100101771 | 100 mm | 1 mm | 9.53 mm | N/A | N/A | 6 |
| 7100032407 | 115 mm | 1 mm | 22.23 mm | N/A | N/A | 6 |
| 7100094853 | 75 mm | 1 mm | 6.35 mm | T41 | 50 | 50 |
| 7100094903 | 75 mm | 1 mm | 8 mm | T41 | 50 | 50 |
| 7100094854 | 75 mm | 1 mm | 9.53 mm | T41 | 50 | 50 |
| 7100228587 | 100 mm | 2 mm | 16 mm | T41 | 50 | 50 |
| 7100015141 | 100 mm | 2 mm | 15.88 mm | T41 | 50 | 50 |
| 7100094902 | 115 mm | 1 mm | 22.23 mm | T41 | 50 | 50 |
| 7100231330 | 115 mm | 1.6 mm | 22.23 mm | T41 | 50 | 50 |
| 7100094901 | 125 mm | 1 mm | 22.23 mm | T41 | 50 | 50 |
| 7100231356 | 125 mm | 1.26 mm | 22.23 mm | T41 | 50 | 50 |
| 7100231343 | 125 mm | 2 mm | 22.23 mm | T41 | 50 | 50 |
| 7100136995 | 180 mm | 2 mm | 22.23 mm | T41 | 50 | 50 |
| 7100136990 | 230 mm | 2 mm | 22.23 mm | T41 | 50 | 50 |
| 7100136991 | 230 mm | 2.5 mm | 22.23 mm | T41 | 50 | 50 |
| 7100136992 | 230 mm | 3 mm | 22.23 mm | T41 | 50 | 50 |
| 7100228947 | 115 mm | 2.5 mm | 22.23 mm | T42 | 50 | 50 |
| 7100228958 | 125 mm | 2.5 mm | 22.23 mm | T42 | 50 | 50 |
| 7100136993 | 180 mm | 2.5 mm | 22.23 mm | T42 | 50 | 50 |
| 7100136994 | 230 mm | 2.5 mm | 22.23 mm | T42 | 50 | 50 |

Product Reference – For Right Angle Grinder

3M™ Silver Cut-Off Wheel

| Stock ID (code) | Diameter | Thickness | Centre hole | Type | Case units | MOQ |
|-----------------|----------|-----------|-------------|------|------------|-----|
| 7100139207 | 75 mm | 0.9 mm | 6 mm | T41 | 50 | 50 |
| 7100139209 | 75 mm | 0.9 mm | 10 mm | T41 | 50 | 50 |
| 7100139211 | 75 mm | 1.6 mm | 10 mm | T41 | 50 | 50 |
| 7100139213 | 100 mm | 0.9 mm | 6 mm | T41 | 50 | 50 |
| 7100139216 | 100 mm | 1 mm | 10 mm | T41 | 50 | 50 |
| 7100139217 | 100 mm | 1 mm | 16 mm | T41 | 50 | 50 |
| 7100139218 | 100 mm | 1.3 mm | 16 mm | T41 | 50 | 50 |
| 7100139219 | 105 mm | 1 mm | 10 mm | T41 | 50 | 50 |
| 7100139220 | 105 mm | 1 mm | 16 mm | T41 | 50 | 50 |
| 7100139225 | 105 mm | 2 mm | 16 mm | T41 | 50 | 50 |
| 7100139227 | 115 mm | 1 mm | 22.23 mm | T41 | 50 | 50 |
| 7100139229 | 115 mm | 1.6 mm | 22.23 mm | T41 | 50 | 50 |
| 7100139232 | 125 mm | 1 mm | 22.23 mm | T41 | 50 | 50 |
| 7100139234 | 125 mm | 1.6 mm | 22.23 mm | T41 | 50 | 50 |
| 7100139235 | 150 mm | 1.6 mm | 22.23 mm | T41 | 50 | 50 |
| 7100139238 | 125 mm | 2 mm | 22.23 mm | T41 | 50 | 50 |
| 7100139239 | 180 mm | 1.6 mm | 22.23 mm | T41 | 50 | 50 |
| 7100139240 | 180 mm | 2 mm | 22.23 mm | T41 | 50 | 50 |
| 7100141045 | 180 mm | 3 mm | 22.23 mm | T41 | 50 | 50 |
| 7100141056 | 115 mm | 2.5 mm | 22.23 mm | T42 | 50 | 50 |
| 7100141067 | 180 mm | 2.5 mm | 22.23 mm | T42 | 50 | 50 |
| 7100141068 | 230 mm | 2 mm | 22.23 mm | T41 | 50 | 50 |

3M™ Cubitron™ II Cut and Grind Wheel

| Stock ID (code) | Diameter | Thickness | Centre hole | Type | Case units | MOQ |
|-----------------|----------|-----------|-------------|------|------------|-----|
| 7100017401 | 100 mm | 4.2 mm | 15.88 mm | T27 | 20 | 20 |
| 7100017404 | 115 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |
| 7100017402 | 125 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |
| 7100017403 | 150 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |
| 7100017411 | 180 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |
| 7100017410 | 230 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |

Product Reference – For Right Angle Grinder

3M™ Cut and Grind Wheel

| Stock ID (code) | Diameter | Thickness | Centre hole | Type | Case units | MOQ |
|-----------------|----------|-----------|-------------|------|------------|-----|
| 7100214038 | 115 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |
| 7100214085 | 127 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |
| 7100214087 | 150 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |
| 7100214088 | 180 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |
| 7100214089 | 230 mm | 4.2 mm | 22.23 mm | T27 | 20 | 20 |

3M™ Cubitron™ II Flexible Grinding Wheels

| Stock ID (code) | Diameter | Thickness | Centre hole | Type | Case units | MOQ |
|-----------------|----------|-----------|-------------|------|------------|-----|
| 7100140055 | 100 mm | 3 mm | 22.23 mm | T27 | 200 | 200 |
| 7100140056 | 115 mm | 3 mm | 22.23 mm | T27 | 200 | 200 |
| 7100140059 | 115 mm | 3 mm | 22.23 mm | T27 | 200 | 200 |
| 7100140057 | 125 mm | 3 mm | 22.23 mm | T27 | 200 | 200 |
| 7100140060 | 125 mm | 3 mm | 22.23 mm | T27 | 200 | 200 |
| 7100140058 | 180 mm | 4 mm | 22.23 mm | T27 | 100 | 100 |

3M™ Cubitron™ II Depressed Centre Grinding Wheel

| Stock ID (code) | Diameter | Thickness | Centre hole | Type | Case units | MOQ |
|-----------------|----------|-----------|-------------|------|------------|-----|
| 7000118427 | 101.6 mm | 6.35 mm | 15.875 mm | T27 | 20 | 20 |
| 7100074406 | 115 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |
| 7100074405 | 125 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |
| 7100074524 | 150 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |
| 7100074407 | 180 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |
| 7100074408 | 230 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |

Product Reference – For Right Angle Grinder

3M™ Silver Depressed Centre Grinding Wheel

| Stock ID (code) | Diameter | Thickness | Centre hole | Type | Case units | MOQ |
|-----------------|----------|-----------|-------------|------|------------|-----|
| 7100141123 | 100 mm | 7 mm | 16 mm | T27 | 20 | 20 |
| 7100141083 | 115 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |
| 7100141086 | 125 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |
| 7100141089 | 150 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |
| 7100141096 | 180 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |
| 7100141099 | 230 mm | 7 mm | 22.23 mm | T27 | 20 | 20 |

3M™ Cubitron™ II Flap Disc 969F

| Stock ID (code) | Diameter | Centre hole | Grade | Type | Case units | MOQ |
|-----------------|----------|-------------|-------|---------|------------|-----|
| 7100105847 | 115 mm | 22 mm | 40+ | Conical | 10 | 10 |
| 7100105848 | 115 mm | 22 mm | 60+ | Conical | 10 | 10 |
| 7100105849 | 115 mm | 22 mm | 80+ | Conical | 10 | 10 |
| 7100105850 | 125 mm | 22 mm | 40+ | Conical | 10 | 10 |
| 7100105851 | 125 mm | 22 mm | 60+ | Conical | 10 | 10 |
| 7100105852 | 125 mm | 22 mm | 80+ | Conical | 10 | 10 |
| 7100105853 | 150 mm | 22 mm | 40+ | Conical | 15 | 15 |
| 7100105854 | 150 mm | 22 mm | 60+ | Conical | 15 | 15 |
| 7100105855 | 150 mm | 22 mm | 80+ | Conical | 15 | 15 |
| 7100105856 | 180 mm | 22 mm | 40+ | Conical | 10 | 10 |
| 7100105857 | 180 mm | 22 mm | 60+ | Conical | 10 | 10 |
| 7100105858 | 180 mm | 22 mm | 80+ | Conical | 10 | 10 |
| 7100105859 | 115 mm | 22 mm | 40+ | Flat | 10 | 10 |
| 7100105860 | 115 mm | 22 mm | 60+ | Flat | 10 | 10 |
| 7100105861 | 115 mm | 22 mm | 80+ | Flat | 10 | 10 |
| 7100105862 | 125 mm | 22 mm | 40+ | Flat | 10 | 10 |
| 7100105863 | 125 mm | 22 mm | 60+ | Flat | 10 | 10 |
| 7100105864 | 125 mm | 22 mm | 80+ | Flat | 10 | 10 |
| 7100105865 | 180 mm | 22 mm | 40+ | Flat | 10 | 10 |
| 7100105866 | 180 mm | 22 mm | 60+ | Flat | 10 | 10 |
| 7100105867 | 180 mm | 22 mm | 80+ | Flat | 10 | 10 |

Product Reference – For Right Angle Grinder

3M™ Cubitron™ II Flap Disc 967A

| Stock ID (code) | Diameter | Centre hole | Grade | Type | Case units | MOQ |
|-----------------|----------|-------------|-------|---------|------------|-----|
| 7000104359 | 115 mm | 22 mm | 40+ | Conical | 10 | 10 |
| 7000104360 | 115 mm | 22 mm | 60+ | Conical | 10 | 10 |
| 7000104361 | 115 mm | 22 mm | 80+ | Conical | 10 | 10 |
| 7100011310 | 125 mm | 22.225 mm | 40+ | Conical | 10 | 10 |
| 7100011144 | 125 mm | 22.225 mm | 60+ | Conical | 10 | 10 |
| 7100011569 | 125 mm | 22.225 mm | 80+ | Conical | 10 | 10 |
| 7100026188 | 150 mm | 22 mm | 40+ | Conical | 15 | 15 |
| 7000104365 | 180 mm | 22 mm | 40+ | Conical | 10 | 10 |
| 7000104366 | 180 mm | 22 mm | 60+ | Conical | 10 | 10 |
| 7000104367 | 180 mm | 22 mm | 80+ | Conical | 10 | 10 |
| 7000104371 | 115 mm | 22 mm | 40+ | Flat | 10 | 10 |
| 7000104372 | 115 mm | 22 mm | 60+ | Flat | 10 | 10 |
| 7000104373 | 115 mm | 22 mm | 80+ | Flat | 10 | 10 |
| 7000104374 | 125 mm | 22 mm | 40+ | Flat | 10 | 10 |
| 7000104375 | 125 mm | 22 mm | 60+ | Flat | 10 | 10 |
| 7000104376 | 125 mm | 22 mm | 80+ | Flat | 10 | 10 |
| 7000104377 | 180 mm | 22 mm | 40+ | Flat | 10 | 10 |
| 7000104378 | 180 mm | 22 mm | 60+ | Flat | 10 | 10 |
| 7000104379 | 180 mm | 22 mm | 80+ | Flat | 10 | 10 |

Product Reference – For Right Angle Grinder

3M™ Flap Disc 769F

| Stock ID (code) | Diameter | Centre hole | Grade | Type | Case units | MOQ |
|-----------------|----------|-------------|-------|---------|------------|-----|
| 7100196818 | 115 mm | 22.23 mm | 40+ | Conical | 100 | 10 |
| 7100196816 | 115 mm | 22.23 mm | 60+ | Conical | 100 | 10 |
| 7100196789 | 115 mm | 22.23 mm | 80+ | Conical | 100 | 10 |
| 7100196539 | 115 mm | 22.23 mm | 120+ | Conical | 100 | 10 |
| 7100196812 | 125 mm | 22.23 mm | 40+ | Conical | 100 | 10 |
| 7100196797 | 125 mm | 22.23 mm | 60+ | Conical | 100 | 10 |
| 7100196791 | 125 mm | 22.23 mm | 80+ | Conical | 100 | 10 |
| 7100196815 | 125 mm | 22.23 mm | 120+ | Conical | 100 | 10 |
| 7100239219 | 150 mm | 22.23 mm | 40+ | Conical | 20 | 20 |
| 7100239223 | 150 mm | 22.23 mm | 60+ | Conical | 20 | 20 |
| 7100240279 | 150 mm | 22.23 mm | 80+ | Conical | 20 | 20 |
| 7100239224 | 150 mm | 22.23 mm | 120+ | Conical | 20 | 20 |
| 7100197061 | 180 mm | 22.23 mm | 40+ | Conical | 20 | 5 |
| 7100196798 | 180 mm | 22.23 mm | 60+ | Conical | 20 | 5 |
| 7100196794 | 180 mm | 22.23 mm | 80+ | Conical | 20 | 5 |
| 7100196793 | 180 mm | 22.23 mm | 120+ | Conical | 20 | 5 |
| 7100196540 | 115 mm | 22.23 mm | 40+ | Flat | 100 | 10 |
| 7100196817 | 115 mm | 22.23 mm | 60+ | Flat | 100 | 10 |
| 7100196820 | 115 mm | 22.23 mm | 80+ | Flat | 100 | 10 |
| 7100196819 | 115 mm | 22.23 mm | 120+ | Flat | 100 | 10 |
| 7100196813 | 125 mm | 22.23 mm | 40+ | Flat | 100 | 10 |
| 7100196799 | 125 mm | 22.23 mm | 60+ | Flat | 100 | 10 |
| 7100196790 | 125 mm | 22.23 mm | 80+ | Flat | 100 | 10 |
| 7100196821 | 125 mm | 22.23 mm | 120+ | Flat | 100 | 10 |
| 7100196538 | 180 mm | 22.23 mm | 40+ | Flat | 20 | 5 |
| 7100196800 | 180 mm | 22.23 mm | 60+ | Flat | 20 | 5 |
| 7100197431 | 180 mm | 22.23 mm | 80+ | Flat | 20 | 5 |
| 7100196792 | 180 mm | 22.23 mm | 120+ | Flat | 20 | 5 |

Product Reference – For Right Angle Grinder

3M™ Cubitron™ II Fibre Disc 982CX Pro

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|-------|------------|-----|
| 7100242886 | 100 mm | 16 mm | 36+ | 100 | 100 |
| 7100242885 | 115 mm | 22.23 mm | 36+ | 100 | 100 |
| 7100246096 | 125 mm | 22.23 mm | 36+ | 100 | 100 |
| 7100242966 | 150 mm | 22.23 mm | 36+ | 100 | 100 |
| 7100242965 | 180 mm | 22.23 mm | 36+ | 100 | 100 |
| 7100242967 | 180 mm | 22.23 mm | 36+ | 100 | 100 |

3M™ Cubitron™ II Fibre Disc 982C

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|-------|------------|-----|
| 7000000402 | 100 mm | 16 mm | 36+ | 100 | 100 |
| 7000000403 | 100 mm | 16 mm | 60+ | 100 | 100 |
| 7000000404 | 100 mm | 16 mm | 80+ | 100 | 100 |
| 7000028192 | 114.3 mm | 22.225 mm | 36+ | 100 | 100 |
| 7000028194 | 115 mm | 22 mm | 60+ | 100 | 100 |
| 7000028196 | 115 mm | 22 mm | 80+ | 100 | 100 |
| 7000028191 | 127 mm | 22.225 mm | 36+ | 100 | 100 |
| 7000028195 | 125 mm | 22 mm | 60+ | 100 | 100 |
| 7000028197 | 125 mm | 22 mm | 80+ | 100 | 100 |
| 7000045230 | 150 mm | 22 mm | 36+ | 100 | 100 |
| 7000000393 | 177.8 mm | 22.225 mm | 36+ | 100 | 100 |
| 7000028201 | 180 mm | 22 mm | 36+ | 100 | 100 |
| 7000028203 | 180 mm | 22 mm | 60+ | 100 | 100 |
| 7000028204 | 180 mm | 22 mm | 80+ | 100 | 100 |
| 7000144562 | 230 mm | 22 mm | 36+ | 100 | 100 |

Product Reference – For Right Angle Grinder

3M™ Cubitron™ II Fibre Disc 987C

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|-------|------------|-----|
| 700000405 | 100 mm | 16 mm | 36+ | 100 | 100 |
| 700000406 | 100 mm | 16 mm | 60+ | 100 | 100 |
| 700000407 | 100 mm | 16 mm | 80+ | 100 | 100 |
| 7000045159 | 115 mm | 22 mm | 36+ | 100 | 100 |
| 7000045160 | 115 mm | 22 mm | 60+ | 100 | 100 |
| 7000045161 | 115 mm | 22 mm | 80+ | 100 | 100 |
| 7000028193 | 125 mm | 22 mm | 36+ | 100 | 100 |
| 7000028199 | 125 mm | 22 mm | 60+ | 100 | 100 |
| 7000028200 | 125 mm | 22 mm | 80+ | 100 | 100 |
| 7000045188 | 180 mm | 22 mm | 36+ | 100 | 100 |
| 7000045186 | 180 mm | 22 mm | 60+ | 100 | 100 |
| 7000045187 | 180 mm | 22 mm | 80+ | 100 | 100 |
| 7000062842 | 115 mm | 22 mm | 36+ | 50 | 50 |
| 7000062843 | 115 mm | 22 mm | 60+ | 50 | 50 |
| 7000062845 | 115 mm | 22 mm | 80+ | 50 | 50 |
| 7000062841 | 125 mm | 22 mm | 36+ | 50 | 50 |
| 7000062844 | 125 mm | 22 mm | 60+ | 50 | 50 |
| 7000062846 | 125 mm | 22 mm | 80+ | 50 | 50 |

Product Reference – For Right Angle Grinder

3M™ Fibre Disc 787C

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|-------|------------|-----|
| 7100099238 | 100 mm | 16 mm | 36+ | 100 | 100 |
| 7100099258 | 100 mm | 16 mm | 60+ | 100 | 100 |
| 7100099252 | 100 mm | 16 mm | 80+ | 100 | 100 |
| 7100099241 | 100 mm | 16 mm | 120+ | 100 | 100 |
| 7100099787 | 115 mm | 22 mm | 36+ | 100 | 100 |
| 7100099260 | 115 mm | 22 mm | 60+ | 100 | 100 |
| 7100099254 | 115 mm | 22 mm | 80+ | 100 | 100 |
| 7100099791 | 115 mm | 22 mm | 120+ | 100 | 100 |
| 7100099788 | 125 mm | 22 mm | 36+ | 100 | 100 |
| 7100099245 | 125 mm | 22 mm | 60+ | 100 | 100 |
| 7100099256 | 125 mm | 22 mm | 80+ | 100 | 100 |
| 7100099546 | 125 mm | 22 mm | 120+ | 100 | 100 |
| 7100099257 | 180 mm | 22 mm | 36+ | 100 | 100 |
| 7100099247 | 180 mm | 22 mm | 60+ | 100 | 100 |
| 7100099240 | 180 mm | 22 mm | 80+ | 100 | 100 |
| 7100099243 | 180 mm | 22 mm | 120+ | 100 | 100 |

3M™ Fibre Disc 782C

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|-------|------------|-----|
| 7100099264 | 100 mm | 16 mm | 36+ | 100 | 100 |
| 7100099249 | 100 mm | 16 mm | 60+ | 100 | 100 |
| 7100099092 | 100 mm | 16 mm | 80+ | 100 | 100 |
| 7100099545 | 115 mm | 22 mm | 36+ | 100 | 100 |
| 7100099250 | 115 mm | 22 mm | 60+ | 100 | 100 |
| 7100099093 | 115 mm | 22 mm | 80+ | 100 | 100 |
| 7100099576 | 125 mm | 22 mm | 36+ | 100 | 100 |
| 7100099094 | 125 mm | 22 mm | 60+ | 100 | 100 |
| 7100099095 | 125 mm | 22 mm | 80+ | 100 | 100 |
| 7100099284 | 180 mm | 22 mm | 36+ | 100 | 100 |
| 7100099091 | 180 mm | 22 mm | 60+ | 100 | 100 |
| 7100099237 | 180 mm | 22 mm | 80+ | 100 | 100 |

Product Reference – For Right Angle Grinder

Scotch-Brite™ Light Grinding and Blending Disc GB-DH

| Stock ID (code) | Diameter | Centre hole | Grade | Colour | Case units | MOQ |
|-----------------|----------|-------------|------------|--------|------------|-----|
| 7000046244 | 114.3 mm | 22.225 mm | Heavy duty | Purple | 50 | 50 |
| 7000046263 | 115 mm | 22 mm | Heavy duty | Purple | 50 | 50 |
| 7000046264 | 115 mm | 22 mm | Super duty | Blue | 50 | 50 |
| 7000046245 | 127 mm | 22.225 mm | Heavy duty | Purple | 50 | 50 |
| 7000046247 | 127 mm | 22.225 mm | Super duty | Blue | 50 | 50 |
| 7000046248 | 177.8 mm | 22.225 mm | Heavy duty | Purple | 25 | 25 |
| 7000046249 | 177.8 mm | 22.225 mm | Heavy duty | Purple | 25 | 25 |

Scotch-Brite™ Precision Surface Conditioning Disc PN-DH

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|--------------|------------|-----|
| 7100274706 | 100 mm | No Hole | Extra coarse | 100 | 100 |
| 7100274705 | 100 mm | No Hole | Coarse | 100 | 100 |
| 7100274669 | 100 mm | No Hole | Medium | 100 | 100 |
| 7100274670 | 100 mm | No Hole | Fine | 100 | 100 |
| 7100274671 | 100 mm | No Hole | Very fine | 100 | 100 |
| 7100274270 | 115 mm | No Hole | Extra coarse | 100 | 100 |
| 7100274273 | 115 mm | No Hole | Coarse | 100 | 100 |
| 7100274223 | 115 mm | No Hole | Medium | 100 | 100 |
| 7100274222 | 115 mm | No Hole | Fine | 100 | 100 |
| 7100274224 | 115 mm | No Hole | Very fine | 100 | 100 |
| 7100274272 | 125 mm | No Hole | Extra coarse | 100 | 100 |
| 7100274275 | 125 mm | No Hole | Coarse | 100 | 100 |
| 7100274271 | 125 mm | No Hole | Medium | 100 | 100 |
| 7100274274 | 125 mm | No Hole | Fine | 100 | 100 |
| 7100274277 | 125 mm | No Hole | Very fine | 100 | 100 |
| 7100274661 | 150 mm | No Hole | Extra coarse | 100 | 100 |
| 7100274660 | 150 mm | No Hole | Coarse | 100 | 100 |
| 7100274662 | 150 mm | No Hole | Medium | 100 | 100 |

Continued...

Product Reference – For Right Angle Grinder

Scotch-Brite™ Precision Surface Conditioning Disc PN-DH (Cont.)

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|--------------|------------|-----|
| 7100274663 | 150 mm | No Hole | Fine | 100 | 100 |
| 7100274704 | 150 mm | No Hole | Very fine | 100 | 100 |
| 7100275256 | 178 mm | No Hole | Extra coarse | 100 | 100 |
| 7100275259 | 178 mm | No Hole | Coarse | 100 | 100 |
| 7100275258 | 178 mm | No Hole | Medium | 100 | 100 |
| 7100275255 | 178 mm | No Hole | Fine | 100 | 100 |
| 7100275253 | 178 mm | No Hole | Very fine | 100 | 100 |
| 7100275260 | 100 mm | 16 mm | Extra coarse | 100 | 100 |
| 7100275261 | 100 mm | 16 mm | Coarse | 100 | 100 |
| 7100275899 | 100 mm | 16 mm | Medium | 100 | 100 |
| 7100275837 | 100 mm | 16 mm | Fine | 100 | 100 |
| 7100275838 | 100 mm | 16 mm | Very fine | 100 | 100 |
| 7100274225 | 115 mm | 22.23 mm | Extra coarse | 100 | 100 |
| 7100274279 | 115 mm | 22.23 mm | Coarse | 100 | 100 |
| 7100275844 | 115 mm | 22.23 mm | Medium | 100 | 100 |
| 7100275836 | 115 mm | 22.23 mm | Fine | 100 | 100 |
| 7100275845 | 115 mm | 22.23 mm | Very fine | 100 | 100 |
| 7100274226 | 125 mm | 22.23 mm | Extra coarse | 100 | 100 |
| 7100274227 | 125 mm | 22.23 mm | Coarse | 100 | 100 |
| 7100274229 | 125 mm | 22.23 mm | Medium | 100 | 100 |
| 7100276268 | 125 mm | 22.23 mm | Fine | 100 | 100 |
| 7100274228 | 125 mm | 22.23 mm | Very fine | 100 | 100 |
| 7100274664 | 178 mm | 22.23 mm | Extra coarse | 100 | 100 |
| 7100274665 | 178 mm | 22.23 mm | Coarse | 100 | 100 |
| 7100274666 | 178 mm | 22.23 mm | Medium | 100 | 100 |
| 7100274667 | 178 mm | 22.23 mm | Fine | 100 | 100 |
| 7100274668 | 178 mm | 22.23 mm | Very fine | 100 | 100 |

Product Reference – For Right Angle Grinder

Scotch-Brite™ Surface Conditioning Disc SC-DH

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|-------------|------------|-----|
| 7100233605 | 100 mm | 16 mm | A coarse | 20 | 20 |
| 7100233780 | 100 mm | 16 mm | A medium | 20 | 20 |
| 7100233781 | 100 mm | 16 mm | A very fine | 20 | 20 |
| 7100233608 | 115 mm | 22 mm | A coarse | 20 | 20 |
| 7100233812 | 115 mm | 22 mm | A medium | 20 | 20 |
| 7100233795 | 115 mm | 22 mm | A very fine | 20 | 20 |
| 7100233609 | 125 mm | 22 mm | A coarse | 20 | 20 |
| 7100233803 | 125 mm | 22 mm | A medium | 20 | 20 |
| 7100234045 | 125 mm | 22 mm | A very fine | 20 | 20 |
| 7100233794 | 178 mm | 22 mm | A coarse | 20 | 20 |
| 7100233775 | 178 mm | 22 mm | A medium | 20 | 20 |
| 7100233809 | 178 mm | 22 mm | A very fine | 20 | 20 |

Scotch-Brite™ Deburr and Finish PRO Unitized Disc DP-UD

| Stock ID (code) | Diameter | Centre hole | Grade | Case units | MOQ |
|-----------------|----------|-------------|---------|------------|-----|
| 7010412238 | 114.3 mm | 22.225 mm | 2S FIN | 5 | 5 |
| 7100081369 | 114.3 mm | 22.225 mm | MED | 5 | 5 |
| 7100109111 | 114.3 mm | 22.225 mm | 8C CRS+ | 5 | 5 |

Product Reference – For Right Angle Grinder

Scotch-Brite™ Clean and Strip XT Pro Disc

| Stock ID (code) | Diameter | Centre hole | Grade | Colour | Case units | MOQ |
|-----------------|----------|-------------|--------|--------|------------|-----|
| 7100192707 | 75 mm | 13 mm | S XCRS | Purple | 10 | 10 |
| 7100192708 | 75 mm | 6 mm | S XCRS | Purple | 10 | 10 |
| 7100192709 | 100 mm | 13 mm | S XCRS | Purple | 10 | 10 |
| 7100176374 | 100 mm | 13 mm | S XCRS | Purple | 30 | 30 |
| 7100192711 | 100 mm | 6 mm | S XCRS | Purple | 10 | 10 |
| 7100192330 | 115 mm | 22 mm | S XCRS | Purple | 10 | 10 |
| 7100192333 | 115 mm | 22 mm | S XCRS | Purple | 10 | 10 |
| 7100192331 | 125 mm | 22 mm | S XCRS | Purple | 10 | 10 |
| 7100192335 | 125 mm | 0 NP | S XCRS | Purple | 10 | 10 |
| 7100192710 | 150 mm | 13 mm | S XCRS | Purple | 6 | 6 |
| 7100176347 | 150 mm | 13 mm | S XCRS | Purple | 20 | 20 |
| 7100192332 | 177.8 mm | 22 mm | S XCRS | Purple | 10 | 10 |
| 7100192334 | 177.8 mm | 22 mm | S XCRS | Purple | 10 | 10 |
| 7100176348 | 200 mm | 13 mm | S XCRS | Purple | 12 | 12 |

Scotch-Brite™ Clean and Strip XT Pro Extra Cut Disc

| Stock ID (code) | Diameter | Centre hole | Grade | Colour | Case units | MOQ |
|-----------------|----------|-------------|--------|--------|------------|-----|
| 7100192735 | 75 mm | 6 mm | A XCRS | Green | 10 | 10 |
| 7100192736 | 75 mm | 6 mm | A XCRS | Green | 10 | 10 |
| 7100192737 | 100 mm | 6 mm | A XCRS | Green | 10 | 10 |
| 7100175138 | 100 mm | 13 mm | A XCRS | Green | 30 | 30 |
| 7100192739 | 100 mm | 6 mm | A XCRS | Green | 10 | 10 |
| 7100192336 | 115 mm | 22 mm | A XCRS | Green | 10 | 10 |
| 7100192339 | 115 mm | 22 mm | A XCRS | Green | 10 | 1 |
| 7100192337 | 125 mm | 22 mm | A XCRS | Green | 10 | 10 |
| 7100192341 | 125 mm | 0 NP | A XCRS | Green | 10 | 10 |
| 7100192738 | 150 mm | 8 mm | A XCRS | Green | 6 | 6 |
| 7100175139 | 150 mm | 13 mm | A XCRS | Green | 20 | 20 |
| 7100191877 | 150 mm | 22 mm | A XCRS | Green | 20 | 20 |
| 7100192338 | 177.8 mm | 22 mm | A XCRS | Green | 10 | 10 |
| 7100192340 | 177.8 mm | 22 mm | A XCRS | Green | 10 | 10 |

Product Reference – For Right Angle Grinder

Scotch-Brite™ Radial Bristle Disc RD-ZB

| Stock ID (code) | Diameter | Centre hole | Grade | Type | Case units | MOQ |
|-----------------|------------|-------------|----------|--------|------------|-----|
| 7100002321 | 14.2875 mm | 1.524 mm | P220 | Type C | 192 | 192 |
| 7000046125 | 14.2875 mm | 1.524 mm | P400 | Type C | 192 | 192 |
| 7000046127 | 14.2875 mm | 1.524 mm | Pol 1 | Type C | 192 | 192 |
| 7000000764 | 14.2875 mm | 1.524 mm | P120 | Type C | 192 | 192 |
| 7000000766 | 19.05 mm | 1.524 mm | 1 Micron | Type C | 192 | 192 |
| 7000000765 | 19.05 mm | 1.524 mm | 6 Micron | Type C | 192 | 192 |
| 7100138342 | 19.05 mm | 1.524 | P120 | Type C | 192 | 192 |
| 7000000758 | 19.05 mm | 1.524 mm | P220 | Type C | 192 | 192 |
| 7000000759 | 19.05 mm | 1.524 mm | P400 | Type C | 192 | 192 |
| 7000000757 | 19.05 mm | 1.524 mm | P80 | Type C | 192 | 192 |
| 7000000760 | 19.05 mm | 1.524 mm | Pumice | Type C | 192 | 192 |
| 7000000763 | 25.4 mm | 3.048 mm | P120 | Type C | 96 | 96 |
| 7100138326 | 25.4 mm | 3.048 mm | P36 | Type C | 96 | 96 |
| 7000000761 | 25.4 mm | 3.048 mm | P50 | Type C | 96 | 96 |
| 7000000762 | 25.4 mm | 3.048 mm | P80 | Type C | 96 | 96 |
| 7000046159 | 50.8 mm | 9.398 mm | 6 Micron | Type C | 80 | 80 |
| 7100138294 | 50.8 mm | 9.398 | P120 | Type C | 80 | 80 |
| 7100138295 | 50.8 mm | 9.398 mm | P220 | Type C | 80 | 80 |
| 7000028529 | 50.8 mm | 9.398 mm | P400 | Type C | 80 | 80 |
| 7100138293 | 50.8 mm | 9.398 | P80 | Type C | 80 | 80 |
| 7000046158 | 50.8 mm | 9.398 mm | Type C | Type C | 80 | 80 |
| 7000046161 | 76.2 mm | 9.398 mm | Type C | Type C | 80 | 80 |
| 7100138297 | 76.2 mm | 9.398 mm | P220 | Type C | 80 | 80 |
| 7000028532 | 76.2 mm | 9.398 mm | P400 | Type C | 80 | 80 |
| 7100138323 | 76.2 mm | 9.398 | P50 | Type C | 40 | 40 |
| 7100138324 | 76.2 mm | 9.398 mm | P80 | Type A | 40 | 40 |
| 7000000771 | 76.2 mm | 9.398 mm | P80 | Type C | 80 | 80 |
| 7100007341 | 76.2 mm | 9.398 mm | 1 Micron | Type C | 80 | 80 |
| 7000000749 | 76.2 mm | 9.398 mm | P120 | Type C | 40 | 40 |
| 7100138296 | 76.2 mm | 9.398 | P120 | Type C | 80 | 80 |

Product Reference – For Right Angle Grinder

Scotch-Brite™ Bristle Disc BD-ZB

| Stock ID (code) | Diameter | Grade/type | Case units | MOQ |
|-----------------|----------|----------------|------------|-----|
| 7100138287 | 115 mm | P50/Green/M14 | 10 | 10 |
| 7100138288 | 115 mm | P80/Yellow/M14 | 10 | 10 |
| 7100138289 | 115 mm | P120/White/M14 | 10 | 10 |

3M™ High Performance Ribbed Back-Up Pad

| Stock ID (code) | Diameter | Colour | Case units | MOQ |
|-----------------|----------|--------|------------|-----|
| 7000032409 | 115 mm | Red | 10 | 10 |
| 7100135643 | 115 mm | Red | 50 | 50 |
| 7000105441 | 115 mm | Black | 10 | 10 |
| 7000032410 | 127 mm | Red | 10 | 10 |
| 7000105442 | 127 mm | Black | 10 | 10 |
| 7100016545 | 178 mm | Black | 5 | 5 |
| 7000032411 | 180 mm | Red | 15 | 15 |

3M™ Centre Pin Back-Up Pad

| Stock ID (code) | Diameter | Size/type | Case units | MOQ |
|-----------------|----------|-----------|------------|-----|
| 7000086469 | 100 mm | 5/8 | 5 | 5 |
| 7000086456 | 100 mm | M10 | 5 | 5 |
| 7000086468 | 100 mm | M14 | 5 | 5 |
| 7000061390 | 115 mm | M14 | 5 | 5 |
| 7000061389 | 125 mm | M14 | 5 | 5 |
| 7000086464 | 180 mm | M14 | 5 | 5 |
| 7000032411 | 180 mm | Red | 15 | 15 |

3M™ Flat Fibre Disc Back-Up Pad

| Stock ID (code) | Diameter | Size/type | Case units | MOQ |
|-----------------|----------|--------------------|------------|-----|
| 7000062869 | 115 mm | M14, IPS | 10 | 10 |
| 7000062870 | 125 mm | IPS | 10 | 10 |
| 7100097174 | 125 mm | Low Profile | 50 | 100 |
| 7000110550 | 127 mm | M14-2.0, Semi-Flex | 10 | 10 |

Product Reference – For Right Angle Grinder

3M™ Electric Angle Grinder

| Stock ID (code) | Diameter | Speed | Power | Case units | MOQ |
|-----------------|----------|----------|--------|------------|-----|
| 7100249667 | 115 mm | Variable | 1900 W | 1 | 1 |
| 7100249668 | 125 mm | Variable | 1900 W | 1 | 1 |
| 7100249666 | 115 mm | Fix | 1900 W | 1 | 1 |
| 7100249665 | 125 mm | Fix | 1900 W | 1 | 1 |

Product Reference – For Abrasive Belts

3M™ Trizact™ Cloth Belt 237AA

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|------------------|-------|------------|-----|
| 7000060078 | 50 mm x 450 mm | A30 | 30 | 30 |
| 7100219029 | 50 mm x 2500 mm | A100 | 30 | 30 |
| 7000059968 | 75 mm x 2000 mm | A65 | 20 | 20 |
| 7000060897 | 75 mm x 2000 mm | A45 | 20 | 20 |
| 7000060033 | 75 mm x 2000 mm | A30 | 20 | 20 |
| 7100219060 | 100 mm x 289 mm | A160 | 20 | 20 |
| 7100219061 | 100 mm x 289 mm | A100 | 20 | 20 |
| 7100219067 | 100 mm x 289 mm | A80 | 20 | 20 |
| 7100219145 | 100 mm x 289 mm | A65 | 20 | 20 |
| 7100219066 | 100 mm x 289 mm | A45 | 20 | 20 |
| 7100219073 | 100 mm x 289 mm | A30 | 20 | 20 |
| 7100219035 | 100 mm x 289 mm | A16 | 20 | 20 |
| 7100219009 | 100 mm x 4000 mm | A100 | 20 | 20 |
| 7100219002 | 100 mm x 9000 mm | A160 | 10 | 10 |
| 7100218951 | 100 mm x 9000 mm | A100 | 10 | 10 |
| 7100218952 | 100 mm x 9000 mm | A80 | 10 | 10 |
| 7000059967 | 300 mm x 3500 mm | A30 | 10 | 10 |

3M™ Cloth Belt 307D

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|-----------------|-------|------------|-----|
| 7100219063 | 12 mm x 2000 mm | P400 | 100 | 100 |
| 7100219072 | 50 mm x 2000 mm | P220 | 30 | 30 |
| 7100219070 | 50 mm x 2000 mm | P600 | 30 | 30 |

Product Reference – For Abrasive Belts

3M™ Trizact™ Cloth Belt 307EA

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|------------------|-------|------------|-----|
| 7100168938 | 25 mm x 4000 mm | A16 | 40 | 40 |
| 7100218983 | 40 mm x 3500 mm | A16 | 30 | 30 |
| 7100218961 | 50 mm x 1520 mm | A100 | 30 | 30 |
| 7000060356 | 50 mm x 1525 mm | A16 | 30 | 30 |
| 7100218974 | 50 mm x 2500 mm | A16 | 30 | 30 |
| 7100218960 | 50 mm x 2500 mm | A30 | 30 | 30 |
| 7000059979 | 50 mm x 3500 mm | A30 | 30 | 30 |
| 7100166994 | 50 mm x 4000 mm | A16 | 30 | 30 |
| 7100219020 | 100 mm x 4000 mm | A45 | 20 | 20 |
| 7100218922 | 300 mm x 3500 mm | A100 | 10 | 10 |
| 7100218957 | 300 mm x 3500 mm | A65 | 10 | 10 |
| 7100218956 | 300 mm x 3500 mm | A30 | 10 | 10 |

3M™ Trizact™ Cloth Belt 337DC

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|-----------------|-------|------------|-----|
| 7100218992 | 100 mm x 289 mm | A160 | 20 | 20 |
| 7100219064 | 100 mm x 289 mm | A65 | 20 | 20 |
| 7100219074 | 100 mm x 289 mm | A30 | 20 | 20 |

3M™ Cubitron™ II Cloth Belt 784F

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|----------------|-------|------------|-----|
| 7100219054 | 10 mm x 330 mm | 60+ | 100 | 100 |
| 7100219053 | 10 mm x 330 mm | 80+ | 100 | 100 |
| 7100218971 | 12 mm x 330 mm | 60+ | 100 | 100 |
| 7100218959 | 13 mm x 305 mm | 60+ | 100 | 100 |
| 7100218935 | 13 mm x 305 mm | 80+ | 100 | 100 |
| 7100218942 | 13 mm x 457 mm | 60+ | 100 | 100 |
| 7100218934 | 13 mm x 457 mm | 80+ | 100 | 100 |
| 7100218941 | 13 mm x 610 mm | 60+ | 100 | 100 |

Continued...

Product Reference – For Abrasive Belts

3M™ Cubitron™ II Cloth Belt 784F (Cont.)

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|------------------|-------|------------|-----|
| 7100219038 | 13 mm x 610 mm | 80+ | 100 | 100 |
| 7100142081 | 20 mm x 457 mm | 50+ | 100 | 100 |
| 7100218938 | 20 mm x 457 mm | 60+ | 100 | 100 |
| 7100218937 | 20 mm x 520 mm | 60+ | 100 | 100 |
| 7100181788 | 20 mm x 520 mm | 80+ | 100 | 100 |
| 7100219050 | 50 mm x 2010 mm | 36+ | 30 | 30 |
| 7100219030 | 50 mm x 4000 mm | 36+ | 30 | 30 |
| 7100219028 | 75 mm x 2000 mm | 36+ | 20 | 20 |
| 7100146406 | 75 mm x 2000 mm | 60+ | 20 | 20 |
| 7100218932 | 75 mm x 2000 mm | 80+ | 20 | 20 |
| 7100219046 | 75 mm x 2000 mm | 120+ | 20 | 20 |
| 7100219056 | 100 mm x 289 mm | 60+ | 20 | 20 |
| 7100219055 | 100 mm x 289 mm | 80+ | 20 | 20 |
| 7100219057 | 100 mm x 2250 mm | 80+ | 20 | 20 |
| 7100219071 | 100 mm x 3000 mm | 36+ | 20 | 20 |
| 7100144567 | 100 mm x 3150 mm | 50+ | 20 | 20 |
| 7100219023 | 100 mm x 3500 mm | 50+ | 20 | 20 |
| 7100219043 | 100 mm x 9000 mm | 80+ | 20 | 20 |
| 7100219037 | 150 mm x 2000 mm | 36+ | 10 | 10 |
| 7100218940 | 150 mm x 2000 mm | 60+ | 10 | 10 |
| 7100219051 | 150 mm x 2000 mm | 120+ | 10 | 10 |
| 7100219036 | 150 mm x 2500 mm | 36+ | 10 | 10 |
| 7100218933 | 150 mm x 2500 mm | 80+ | 10 | 10 |
| 7100218939 | 150 mm x 3000 mm | 60+ | 10 | 10 |
| 7100219045 | 150 mm x 3500 mm | 36+ | 10 | 10 |
| 7100219013 | 150 mm x 3500 mm | 50+ | 10 | 10 |
| 7100169532 | 190 mm x 2360 mm | 120+ | 10 | 10 |

Continued...

Product Reference – For Abrasive Belts

3M™ Cubitron™ II Cloth Belt 784F (Cont.)

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|-------------------|-------|------------|-----|
| 7100219033 | 220 mm x 2000 mm | 36+ | 10 | 10 |
| 7100219004 | 220 mm x 2000 mm | 50+ | 10 | 10 |
| 7100181358 | 300 mm x 16900 mm | 36+ | 45 | 45 |
| 7100218936 | 300 mm x 22285 mm | 60+ | 1 | 1 |
| 7100219052 | 1300 mm x 1900 mm | 36+ | 2 | 2 |

3M™ Cubitron™ II Cloth Belt 947A

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|----------------|-------|------------|-----|
| 7100176940 | 10 mm x 330 mm | 40+ | 100 | 100 |
| 7100069960 | 10 mm x 330 mm | 60+ | 100 | 100 |
| 7100070629 | 10 mm x 330 mm | 80+ | 100 | 100 |
| 7100218984 | 10 mm x 330 mm | 120+ | 100 | 100 |
| 7100219058 | 12 mm x 330 mm | 60+ | 100 | 100 |
| 7100219040 | 13 mm x 305 mm | 60+ | 100 | 100 |
| 7100219041 | 13 mm x 305 mm | 80+ | 100 | 100 |
| 7100026792 | 13 mm x 457 mm | 40+ | 100 | 100 |
| 7100026527 | 13 mm x 457 mm | 60+ | 100 | 100 |
| 7100026427 | 13 mm x 457 mm | 80+ | 100 | 100 |
| 7100026526 | 13 mm x 610 mm | 60+ | 100 | 100 |
| 7100026755 | 13 mm x 610 mm | 80+ | 100 | 100 |
| 7100026547 | 13 mm x 610 mm | 120+ | 100 | 100 |
| 7100028819 | 19 mm x 457 mm | 40+ | 100 | 100 |
| 7100027081 | 19 mm x 457 mm | 60+ | 100 | 100 |
| 7100027618 | 19 mm x 457 mm | 120+ | 100 | 100 |
| 7100026793 | 19 mm x 520 mm | 40+ | 100 | 100 |
| 7100026791 | 19 mm x 520 mm | 80+ | 100 | 100 |
| 7100218955 | 20 mm x 480 mm | 60+ | 100 | 100 |
| 7100218954 | 20 mm x 520 mm | 60+ | 100 | 100 |
| 7100047970 | 20 mm x 520 mm | 80+ | 100 | 100 |
| 7100218950 | 20 mm x 520 mm | 120+ | 100 | 100 |

Continued...

Product Reference – For Abrasive Belts

3M™ Cubitron™ II Cloth Belt 947A (Cont.)

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|------------------|-------|------------|-----|
| 7100219049 | 40 mm x 314 mm | 120+ | 30 | 30 |
| 7100218993 | 50 mm x 450 mm | 120+ | 30 | 30 |
| 7100218953 | 50 mm x 2500 mm | 40+ | 30 | 30 |
| 7100026498 | 50 mm x 4000 mm | 120+ | 30 | 30 |
| 7100025847 | 75 mm x 2000 mm | 60+ | 20 | 20 |
| 7100026546 | 75 mm x 2000 mm | 120+ | 20 | 20 |
| 7100026426 | 100 mm x 289 mm | 60+ | 20 | 20 |
| 7100026670 | 100 mm x 289 mm | 80+ | 20 | 20 |
| 7100219001 | 100 mm x 9000 mm | 60+ | 20 | 20 |
| 7100219068 | 100 mm x 9000 mm | 80+ | 20 | 20 |
| 7100026529 | 100 mm x 9000 mm | 120+ | 20 | 20 |
| 7100219007 | 120 mm x 9000 mm | 120+ | 10 | 10 |
| 7100219146 | 345 mm x 1615 mm | 120+ | 5 | 5 |

3M™ Cubitron™ II Cloth Belt 984F

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|----------------|-------|------------|-----|
| 7100218943 | 10 mm x 305 mm | 80+ | 100 | 100 |
| 7000060872 | 10 mm x 330 mm | 60+ | 100 | 100 |
| 7000060879 | 10 mm x 330 mm | 80+ | 100 | 100 |
| 7000060889 | 12 mm x 330 mm | 60+ | 100 | 100 |
| 7000060887 | 12 mm x 330 mm | 80+ | 100 | 100 |
| 7100218990 | 12 mm x 520 mm | 36+ | 100 | 100 |
| 7000060873 | 13 mm x 305 mm | 60+ | 100 | 100 |
| 7000060865 | 13 mm x 457 mm | 60+ | 100 | 100 |
| 7000060866 | 13 mm x 457 mm | 80+ | 100 | 100 |
| 7000060862 | 13 mm x 610 mm | 36+ | 100 | 100 |
| 7000060867 | 13 mm x 610 mm | 60+ | 100 | 100 |
| 7000060868 | 13 mm x 610 mm | 80+ | 100 | 100 |
| 7000060870 | 20 mm x 457 mm | 60+ | 100 | 100 |
| 7000060880 | 20 mm x 520 mm | 80+ | 100 | 100 |

Continued...

Product Reference – For Abrasive Belts

3M™ Cubitron™ II Cloth Belt 984F (Cont.)

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|-----------------|-------|------------|-----|
| 7000060863 | 20 mm x 520 mm | 36+ | 100 | 100 |
| 7000060823 | 25 mm x 4000 mm | 36+ | 40 | 40 |
| 7100030136 | 25 mm x 4000 mm | 60+ | 40 | 40 |
| 7100219014 | 30 mm x 1250 mm | 80+ | 40 | 40 |
| 7000060768 | 38 mm x 1525 mm | 36+ | 40 | 40 |
| 7100218988 | 50 mm x 1000 mm | 36+ | 30 | 30 |
| 7100219008 | 50 mm x 1500 mm | 36+ | 30 | 30 |
| 7000060748 | 50 mm x 2000 mm | 36+ | 30 | 30 |
| 7000060848 | 50 mm x 2000 mm | 60+ | 30 | 30 |
| 7000060849 | 50 mm x 2000 mm | 80+ | 30 | 30 |
| 7000060741 | 50 mm x 2500 mm | 36+ | 30 | 30 |
| 7100218978 | 50 mm x 2500 mm | 60+ | 30 | 30 |
| 7100218982 | 50 mm x 2740 mm | 60+ | 30 | 30 |
| 7100218948 | 50 mm x 3500 mm | 60+ | 30 | 30 |
| 7100218973 | 50 mm x 3500 mm | 80+ | 30 | 30 |
| 7000060754 | 50 mm x 4000 mm | 36+ | 30 | 30 |
| 7000060780 | 50 mm x 4000 mm | 60+ | 30 | 30 |
| 7100218996 | 50 mm x 787 mm | 36+ | 30 | 30 |
| 7000060743 | 50mm x 3500mm | 36+ | 30 | 30 |
| 7100219016 | 60 mm x 2175 mm | 36+ | 30 | 30 |
| 7000060749 | 60 mm x 3500 mm | 36+ | 30 | 30 |
| 7100219021 | 70 mm x 2000 mm | 60+ | 30 | 30 |
| 7100219059 | 70 mm x 4000 mm | 36+ | 20 | 30 |
| 7000060753 | 75 mm x 2000 mm | 36+ | 20 | 20 |
| 7000060778 | 75 mm x 2000 mm | 60+ | 20 | 20 |
| 7000060777 | 75 mm x 2000 mm | 80+ | 20 | 20 |
| 7000060762 | 75 mm x 2250 mm | 36+ | 20 | 20 |
| 7000060742 | 75 mm x 2500 mm | 36+ | 20 | 20 |
| 7000060766 | 75 mm x 3000 mm | 36+ | 20 | 20 |
| 7100219024 | 75 mm x 4000 mm | 36+ | 20 | 30 |

Continued...

Product Reference – For Abrasive Belts

3M™ Cubitron™ II Cloth Belt 984F (Cont.)

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|-------------------|-------|------------|-----|
| 7100219005 | 80 mm x 9000 mm | 80+ | 20 | 20 |
| 7000060773 | 100 mm x 1000 mm | 36+ | 20 | 20 |
| 7000060767 | 100 mm x 1220 mm | 36+ | 20 | 20 |
| 7000060755 | 100 mm x 2000 mm | 36+ | 20 | 20 |
| 7100218981 | 100 mm x 2000 mm | 60+ | 20 | 20 |
| 7100219022 | 100 mm x 2200 mm | 36+ | 20 | 20 |
| 7100218972 | 100 mm x 2250 mm | 36+ | 20 | 20 |
| 7100218969 | 100 mm x 2500 mm | 36+ | 20 | 20 |
| 7000060776 | 100 mm x 2740 mm | 36+ | 20 | 20 |
| 7000060756 | 100 mm x 3000 mm | 36+ | 20 | 20 |
| 7100219000 | 100 mm x 3450 mm | 36+ | 20 | 20 |
| 7000060746 | 100 mm x 3500 mm | 36+ | 20 | 20 |
| 7100218977 | 100 mm x 9000 mm | 80+ | 20 | 20 |
| 7100218999 | 102 mm x 4270 mm | 36+ | 20 | 20 |
| 7100218968 | 120 mm x 1000 mm | 36+ | 10 | 10 |
| 7100218991 | 120 mm x 2300 mm | 36+ | 10 | 10 |
| 7000060757 | 120 mm x 2500 mm | 36+ | 10 | 10 |
| 7100218967 | 120 mm x 2800 mm | 36+ | 10 | 10 |
| 7100219017 | 120 mm x 9000 mm | 36+ | 10 | 10 |
| 7100219011 | 145 mm x 4000 mm | 36+ | 10 | 10 |
| 7100219025 | 150 mm x 1900 mm | 36+ | 10 | 10 |
| 7000060771 | 150 mm x 10700 mm | 36+ | 6 | 6 |
| 7000060751 | 150 mm x 2000 mm | 36+ | 10 | 10 |
| 7000060775 | 150 mm x 2000 mm | 60+ | 10 | 10 |
| 7000060789 | 150 mm x 2000 mm | 80+ | 10 | 10 |
| 7000060822 | 150 mm x 2250 mm | 36+ | 10 | 10 |
| 7100218966 | 150 mm x 2500 mm | 36+ | 10 | 10 |
| 7100218980 | 150 mm x 2500 mm | 60+ | 10 | 10 |
| 7100218975 | 150 mm x 2500 mm | 80+ | 10 | 10 |
| 7000060752 | 150 mm x 3500 mm | 36+ | 10 | 10 |
| 7000060790 | 150 mm x 3500 mm | 60+ | 10 | 10 |

Continued...

Product Reference – For Abrasive Belts

3M™ Cubitron™ II Cloth Belt 984F (Cont.)

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|-------------------|-------|------------|-----|
| 7000060788 | 150 mm x 3500 mm | 80+ | 10 | 10 |
| 7100038905 | 190 mm x 2360 mm | 80+ | 10 | 10 |
| 7000060772 | 200 mm x 4250 mm | 36+ | 5 | 5 |
| 7100218965 | 300 mm x 2000 mm | 36+ | 10 | 10 |
| 7100218964 | 300 mm x 3000 mm | 36+ | 10 | 10 |
| 7100218976 | 300 mm x 3000 mm | 80+ | 10 | 10 |
| 7100218962 | 300 mm x 3500 mm | 36+ | 5 | 5 |
| 7100218985 | 300 mm x 3500 mm | 60+ | 10 | 10 |
| 7100218945 | 300 mm x 3500 mm | 80+ | 10 | 10 |
| 7100144158 | 300 mm x 16900 mm | 36+ | 45 | 45 |

3M™ Cubitron™ II Cloth Belt 994F

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|-----------------|-------|------------|-----|
| 7000060890 | 50 mm x 3500 mm | 36+ | 30 | 30 |

Scotch-Brite™ Durable Flex Belt DF-BL

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|----------------|-------|------------|-----|
| 7000067935 | 6 mm x 457 mm | A CRS | 25 | 25 |
| 7100219034 | 6 mm x 457 mm | A MED | 25 | 25 |
| 7100219015 | 6 mm x 610 mm | A MED | 25 | 25 |
| 7000067940 | 6 mm x 610 mm | A FIN | 25 | 25 |
| 7100219018 | 10 mm x 330 mm | A CRS | 25 | 25 |
| 7100218994 | 10 mm x 330 mm | A FIN | 25 | 25 |
| 7100219026 | 12 mm x 330 mm | A CRS | 25 | 25 |
| 7100218947 | 13 mm x 457 mm | A CRS | 25 | 25 |
| 7100218963 | 13 mm x 457 mm | A MED | 25 | 25 |
| 7100219042 | 13 mm x 457 mm | A FIN | 25 | 25 |

Continued...

Product Reference – For Abrasive Belts

Scotch-Brite™ Durable Flex Belt DF-BL (Cont.)

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|-----------------|-------|------------|-----|
| 7100218986 | 13 mm x 610 mm | A CRS | 25 | 25 |
| 7100218979 | 13 mm x 610 mm | A MED | 25 | 25 |
| 7100219006 | 13 mm x 610 mm | A FIN | 25 | 25 |
| 7100218946 | 20 mm x 520 mm | A CRS | 10 | 10 |
| 7100218970 | 25 mm x 457 mm | A FIN | 10 | 10 |
| 7100219010 | 50 mm x 1100 mm | A MED | 6 | 6 |
| 7100219027 | 50 mm x 2500 mm | A MED | 6 | 6 |
| 7100219003 | 60 mm x 2400 m | A CRS | 6 | 6 |
| 7100219048 | 100 mm x 289 mm | A CRS | 5 | 5 |
| 7100219044 | 100 mm x 289 mm | A MED | 5 | 5 |
| 7100219047 | 100 mm x 289 mm | A FIN | 5 | 5 |

Scotch-Brite™ Surface Conditioning Belt

| Stock ID (code) | Size | Grade | Type | Case units | MOQ |
|-----------------|------------------|-------|------------------------|------------|-----|
| 7000068145 | 50 mm x 2000 mm | A CRS | Low Stretch Belt SC-BL | 6 | 6 |
| 7000068146 | 50 mm x 2000 mm | A MED | Low Stretch Belt SC-BL | 6 | 6 |
| 7000067959 | 75 mm x 1500 mm | A VFN | Low Stretch Belt SC-BL | 6 | 6 |
| 7000068149 | 75 mm x 2000 mm | A CRS | Low Stretch Belt SC-BL | 6 | 6 |
| 7100176888 | 75 mm x 2000 mm | A MED | Low Stretch Belt SC-BL | 6 | 6 |
| 7000068151 | 75 mm x 2000 mm | A VFN | Low Stretch Belt SC-BL | 6 | 6 |
| 7100218989 | 75 mm x 3500 mm | A MED | Low Stretch Belt SC-BL | 6 | 6 |
| 7100219069 | 100 mm x 289 mm | A CRS | Film Backed Belt SC-BF | 5 | 5 |
| 7000068172 | 100 mm x 289 mm | A MED | Film Backed Belt | 5 | 5 |
| 7100175851 | 100 mm x 3000 mm | S SFN | Low Stretch Belt SC-BL | 3 | 3 |
| 7000068137 | 100 mm x 3500 mm | A MED | Low Stretch Belt SC-BL | 2 | 2 |
| 7000068138 | 100 mm x 3500 mm | A VFN | Low Stretch Belt SC-BL | 2 | 2 |
| 7100219019 | 100 mm x 9000 mm | A MED | Film Backed Belt | 1 | 1 |
| 7100218944 | 110 mm x 3000 mm | S SFN | Low Stretch Belt SC-BL | 3 | 3 |

Continued...

Product Reference – For Abrasive Belts

Scotch-Brite™ Surface Conditioning Belt (Cont.)

| Stock ID (code) | Size | Grade | Type | Case units | MOQ |
|-----------------|-------------------|-------|------------------------|------------|-----|
| 7000068128 | 120 mm x 2080 mm | A VFN | Low Stretch Belt SC-BL | 5 | 5 |
| 7000068139 | 150 mm x 2000 mm | A CRS | Low Stretch Belt SC-BL | 3 | 3 |
| 7100176884 | 150 mm x 2000 mm | A MED | Low Stretch Belt SC-BL | 3 | 3 |
| 7000068142 | 150 mm x 2500 mm | A MED | Low Stretch Belt SC-BL | 3 | 3 |
| 7100176893 | 300 mm x 2500 mm | A MED | Low Stretch Belt SC-BL | 3 | 3 |
| 7100218949 | 300 mm x 10300 mm | A MED | Film Backed Belt | 1 | 1 |

Scotch-Brite™ Surface Conditioning Belt SC-BS

| Stock ID (code) | Size | Grade | Case units | MOQ |
|-----------------|------------------|-------|------------|-----|
| 7000068164 | 6 mm x 610 mm | A MED | 25 | 25 |
| 7000068165 | 13 mm x 305 mm | A MED | 25 | 25 |
| 7100219031 | 13 mm x 457 mm | A CRS | 25 | 25 |
| 7000068161 | 13 mm x 457 mm | A MED | 25 | 25 |
| 7100219039 | 13 mm x 457 mm | A VFN | 25 | 25 |
| 7000068023 | 13 mm x 610 mm | A CRS | 25 | 25 |
| 7100218958 | 13 mm x 610 mm | A MED | 25 | 25 |
| 7100219032 | 13 mm x 610 mm | A VFN | 25 | 25 |
| 7000068163 | 19 mm x 457 mm | A MED | 25 | 25 |
| 7000068133 | 20 mm x 457 mm | A MED | 10 | 10 |
| 7000068152 | 20 mm x 520 mm | A MED | 10 | 10 |
| 7100218997 | 25 mm x 610 mm | A MED | 10 | 10 |
| 7000068155 | 30 mm x 533 mm | A MED | 10 | 10 |
| 7000068168 | 50 mm x 450 mm | A CRS | 10 | 10 |
| 7000067795 | 50 mm x 450 mm | A MED | 10 | 10 |
| 7100218998 | 90 mm x 395 mm | A CRS | 10 | 10 |
| 7100218987 | 90 mm x 395 mm | A MED | 10 | 10 |
| 7000068024 | 90 mm x 395 mm | A MED | 10 | 10 |
| 7100218995 | 100 mm x 3000 mm | A VFN | 3 | 3 |

Product Reference – For Abrasive Belts

Tools

| Stock ID (code) | Product description | Case units | MOQ |
|-----------------|---|------------|-----|
| 7000032216 | 3M™ Air Powered File Belt Sander,13 mm x 457 mm | 1 | 1 |
| 7000045264 | 3M™ File Belt Sander Platen Pad Material 13mm | 10 | 10 |
| 7000045266 | 3M™ File Belt Sander Platen Pad Material 13mm | 10 | 10 |

Product Reference – For Random Orbital Sander

3M Xtract™ Cubitron™ II Net disc 710W

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100254713 | 34 mm | 80+ | Hookit | No hole | 500 | 500 |
| 7100254714 | 34 mm | 120+ | Hookit | No hole | 500 | 500 |
| 7100254715 | 34 mm | 150+ | Hookit | No hole | 500 | 500 |
| 7100254754 | 34 mm | 180+ | Hookit | No hole | 500 | 500 |
| 7100254725 | 34 mm | 220+ | Hookit | No hole | 500 | 500 |
| 7100254723 | 34 mm | 240+ | Hookit | No hole | 500 | 500 |
| 7100254724 | 34 mm | 320+ | Hookit | No hole | 500 | 500 |
| 7100250115 | 75 mm | 80+ | Hookit | No hole | 300 | 300 |
| 7100250114 | 75 mm | 120+ | Hookit | No hole | 300 | 300 |
| 7100250120 | 75 mm | 150+ | Hookit | No hole | 300 | 300 |
| 7100250119 | 75 mm | 180+ | Hookit | No hole | 300 | 300 |
| 7100250118 | 75 mm | 220+ | Hookit | No hole | 300 | 300 |
| 7100250117 | 75 mm | 240+ | Hookit | No hole | 300 | 300 |
| 7100250116 | 75 mm | 320+ | Hookit | No hole | 300 | 300 |
| 7100251170 | 125 mm | 80+ | Hookit | No hole | 300 | 300 |
| 7100251171 | 125 mm | 120+ | Hookit | No hole | 300 | 300 |
| 7100251172 | 125 mm | 150+ | Hookit | No hole | 300 | 300 |
| 7100251173 | 125 mm | 180+ | Hookit | No hole | 300 | 300 |
| 7100251950 | 125 mm | 220+ | Hookit | No hole | 300 | 300 |
| 7100251167 | 125 mm | 240+ | Hookit | No hole | 300 | 300 |
| 7100251165 | 125 mm | 320+ | Hookit | No hole | 300 | 300 |
| 7100251206 | 150 mm | 80+ | Hookit | No hole | 300 | 300 |
| 7100251205 | 150 mm | 120+ | Hookit | No hole | 300 | 300 |
| 7100251204 | 150 mm | 150+ | Hookit | No hole | 300 | 300 |
| 7100251177 | 150 mm | 180+ | Hookit | No hole | 300 | 300 |
| 7100251178 | 150 mm | 220+ | Hookit | No hole | 300 | 300 |
| 7100251951 | 150 mm | 240+ | Hookit | No hole | 300 | 300 |
| 7100251168 | 150 mm | 320+ | Hookit | No hole | 300 | 300 |
| 7100251196 | 203 mm | 80+ | Hookit | No hole | 300 | 300 |
| 7100251189 | 203 mm | 120+ | Hookit | No hole | 300 | 300 |
| 7100251190 | 203 mm | 150+ | Hookit | No hole | 300 | 300 |

Continued...

Product Reference – For Random Orbital Sander

3M Xtract™ Cubitron™ II Net disc 710W (Cont.)

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------------------------|---------------|--------------|------------|-----|
| 7100251191 | 203 mm | 180+ | Hookit | No hole | 300 | 300 |
| 7100251952 | 203 mm | 220+ | Hookit | No hole | 300 | 300 |
| 7100251184 | 203 mm | 240+ | Hookit | No hole | 300 | 300 |
| 7100251185 | 203 mm | 320+ | Hookit | No hole | 300 | 300 |
| 7100254485 | 125 mm | 2×80+2×120+2×180+2×320+ | Hookit | No hole | 100 | 100 |
| 7100254484 | 150 mm | 2×80+2×120+2×180+2×320+ | Hookit | No hole | 100 | 100 |

3M Xtract™ Net Disc 310W

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100250481 | 75 mm | 80+ | Hookit | No hole | 500 | 500 |
| 7100250480 | 75 mm | 120+ | Hookit | No hole | 500 | 500 |
| 7100250478 | 75 mm | 150+ | Hookit | No hole | 500 | 500 |
| 7100250479 | 75 mm | 180+ | Hookit | No hole | 500 | 500 |
| 7100250477 | 75 mm | 220+ | Hookit | No hole | 500 | 500 |
| 7100250476 | 75 mm | 240+ | Hookit | No hole | 500 | 500 |
| 7100250475 | 75 mm | 320+ | Hookit | No hole | 500 | 500 |
| 7100250109 | 125 mm | 80+ | Hookit | No hole | 500 | 500 |
| 7100251169 | 125 mm | 120+ | Hookit | No hole | 500 | 500 |
| 7100251162 | 125 mm | 150+ | Hookit | No hole | 500 | 500 |
| 7100251163 | 125 mm | 180+ | Hookit | No hole | 500 | 500 |
| 7100251156 | 125 mm | 220+ | Hookit | No hole | 500 | 500 |
| 7100251153 | 125 mm | 240+ | Hookit | No hole | 500 | 500 |
| 7100250113 | 125 mm | 320+ | Hookit | No hole | 500 | 500 |
| 7100251183 | 150 mm | 80+ | Hookit | No hole | 300 | 300 |
| 7100251166 | 150 mm | 120+ | Hookit | No hole | 300 | 300 |
| 7100251949 | 150 mm | 150+ | Hookit | No hole | 300 | 300 |
| 7100251161 | 150 mm | 180+ | Hookit | No hole | 300 | 300 |

Continued...

Product Reference – For Random Orbital Sander

3M Xtract™ Net Disc 310W (Cont.)

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|----------------------------------|---------------|--------------|------------|-----|
| 7100251179 | 150 mm | 220+ | Hookit | No hole | 300 | 300 |
| 7100251180 | 150 mm | 240+ | Hookit | No hole | 300 | 300 |
| 7100251181 | 150 mm | 320+ | Hookit | No hole | 300 | 300 |
| 7100251187 | 203 mm | 80+ | Hookit | No hole | 500 | 500 |
| 7100251188 | 203 mm | 120+ | Hookit | No hole | 500 | 500 |
| 7100249781 | 203 mm | 150+ | Hookit | No hole | 500 | 500 |
| 7100251200 | 203 mm | 180+ | Hookit | No hole | 500 | 500 |
| 7100251201 | 203 mm | 220+ | Hookit | No hole | 500 | 500 |
| 7100251194 | 203 mm | 240+ | Hookit | No hole | 500 | 500 |
| 7100251195 | 203 mm | 320+ | Hookit | No hole | 500 | 500 |
| 7100254493 | 125 mm | Multi-pack 80+/120+/180+/320+ | Hookit | No hole | 100 | 100 |
| 7100254496 | 150 mm | Multi-pack 80+/120+/180+/320+ | Hookit | No hole | 100 | 100 |

3M Xtract™ Cubitron™ II Film Disc 775L

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100106678 | 76 mm | 80+ | Hookit | Clean sand | 250 | 250 |
| 7100106714 | 76 mm | 120+ | Hookit | Clean sand | 250 | 250 |
| 7100106717 | 76 mm | 150+ | Hookit | Clean sand | 250 | 250 |
| 7100111238 | 76 mm | 180+ | Hookit | Clean sand | 250 | 250 |
| 7100106716 | 76 mm | 220+ | Hookit | Clean sand | 250 | 250 |
| 7100145460 | 76 mm | 240+ | Hookit | Clean sand | 250 | 250 |
| 7100145433 | 76 mm | 320+ | Hookit | Clean sand | 250 | 250 |
| 7100145452 | 76 mm | 400+ | Hookit | Clean sand | 250 | 250 |
| 7100045070 | 127 mm | 80+ | Hookit | Clean sand | 250 | 250 |
| 7100064175 | 127 mm | 150+ | Hookit | Clean sand | 250 | 250 |
| 7100064177 | 127 mm | 180+ | Hookit | Clean sand | 250 | 250 |
| 7100064270 | 127 mm | 220+ | Hookit | Clean sand | 250 | 250 |
| 7100045071 | 127 mm | 120+ | Hookit | Clean sand | 250 | 250 |

Continued...

Product Reference – For Random Orbital Sander

3M Xtract™ Cubitron™ II Film Disc 775L (Cont.)

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100145362 | 127 mm | 240+ | Hookit | Clean sand | 250 | 250 |
| 7100145363 | 127 mm | 320+ | Hookit | Clean sand | 250 | 250 |
| 7100145404 | 127 mm | 400+ | Hookit | Clean sand | 250 | 250 |
| 7100045072 | 152 mm | 80+ | Hookit | Clean sand | 250 | 250 |
| 7100045073 | 152 mm | 120+ | Hookit | Clean sand | 250 | 250 |
| 7100065918 | 152 mm | 150+ | Hookit | Clean sand | 250 | 250 |
| 7100064178 | 152 mm | 180+ | Hookit | Clean sand | 250 | 250 |
| 7100064271 | 152 mm | 220+ | Hookit | Clean sand | 250 | 250 |
| 7100145316 | 152 mm | 240+ | Hookit | Clean sand | 250 | 250 |
| 7100141692 | 152 mm | 320+ | Hookit | Clean sand | 250 | 250 |
| 7100145455 | 152 mm | 400+ | Hookit | Clean sand | 250 | 250 |
| 7100246422 | 203 mm | 80+ | Hookit | Clean sand | 250 | 250 |
| 7100246524 | 203 mm | 120+ | Hookit | Clean sand | 250 | 250 |
| 7100248339 | 203 mm | 150+ | Hookit | Clean sand | 250 | 250 |
| 7100248337 | 203 mm | 180+ | Hookit | Clean sand | 250 | 250 |
| 7100246533 | 203 mm | 220+ | Hookit | Clean sand | 250 | 250 |
| 7100246535 | 203 mm | 240+ | Hookit | Clean sand | 250 | 250 |
| 7100246534 | 203 mm | 320+ | Hookit | Clean sand | 250 | 250 |
| 7100246525 | 203 mm | 400+ | Hookit | Clean sand | 250 | 250 |

3M™ Cubitron™ II Hookit™ Film Disc 775L

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100106742 | 76 mm | 80+ | Hookit | No hole | 250 | 250 |
| 7100106764 | 76 mm | 120+ | Hookit | No hole | 250 | 250 |
| 7100106762 | 76 mm | 150+ | Hookit | No hole | 250 | 250 |
| 7100106768 | 76 mm | 180+ | Hookit | No hole | 250 | 250 |
| 7100106766 | 76 mm | 220+ | Hookit | No hole | 250 | 250 |
| 7100145430 | 76 mm | 240+ | Hookit | No hole | 250 | 250 |
| 7100145431 | 76 mm | 320+ | Hookit | No hole | 250 | 250 |

Continued...

Product Reference – For Random Orbital Sander

3M™ Cubitron™ II Hookit™ Film Disc 775L (Cont.)

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100145477 | 76 mm | 400+ | Hookit | No hole | 250 | 250 |
| 7100046325 | 127 mm | 80+ | Hookit | No hole | 250 | 250 |
| 7100046326 | 127 mm | 120+ | Hookit | No hole | 250 | 250 |
| 7100064174 | 127 mm | 150+ | Hookit | No hole | 250 | 250 |
| 7100064176 | 127 mm | 180+ | Hookit | No hole | 250 | 250 |
| 7100064179 | 127 mm | 220+ | Hookit | No hole | 250 | 250 |
| 7100145403 | 127 mm | 240+ | Hookit | No hole | 250 | 250 |
| 7100145405 | 127 mm | 320+ | Hookit | No hole | 250 | 250 |
| 7100145436 | 127 mm | 400+ | Hookit | No hole | 250 | 250 |
| 7100046327 | 152 mm | 80+ | Hookit | No hole | 250 | 250 |
| 7100046328 | 152 mm | 120+ | Hookit | No hole | 250 | 250 |
| 7100064273 | 152 mm | 150+ | Hookit | No hole | 250 | 250 |
| 7100064272 | 152 mm | 180+ | Hookit | No hole | 250 | 250 |
| 7100064274 | 152 mm | 220+ | Hookit | No hole | 250 | 250 |
| 7100145407 | 152 mm | 240+ | Hookit | No hole | 250 | 250 |
| 7100145462 | 152 mm | 320+ | Hookit | No hole | 250 | 250 |
| 7100145469 | 152 mm | 400+ | Hookit | No hole | 250 | 250 |
| 7100249319 | 203 mm | 80+ | Hookit | No hole | 250 | 250 |
| 7100249473 | 203 mm | 120+ | Hookit | No hole | 250 | 250 |
| 7100249427 | 203 mm | 150+ | Hookit | No hole | 250 | 250 |
| 7100249431 | 203 mm | 180+ | Hookit | No hole | 250 | 250 |
| 7100249320 | 203 mm | 220+ | Hookit | No hole | 250 | 250 |
| 7100249321 | 203 mm | 240+ | Hookit | No hole | 250 | 250 |
| 7100249322 | 203 mm | 320+ | Hookit | No hole | 250 | 250 |
| 7100249443 | 203 mm | 400+ | Hookit | No hole | 250 | 250 |

Product Reference – For Random Orbital Sander

3M™ Cubitron™ II Hookit™ Disc 950U

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100187013 | 127 mm | 180+ | Hookit | No hole | 250 | 250 |
| 7100187014 | 127 mm | 150+ | Hookit | No hole | 250 | 250 |
| 7100187015 | 127 mm | 120+ | Hookit | No hole | 4000 | 250 |
| 7100187016 | 127 mm | 80+ | Hookit | No hole | 4000 | 250 |
| 7100187017 | 127 mm | 60+ | Hookit | No hole | 250 | 250 |
| 7100190717 | 152 mm | 180+ | Hookit | No hole | 250 | 250 |
| 7100190718 | 152 mm | 60+ | Hookit | No hole | 250 | 250 |
| 7100190719 | 152 mm | 80+ | Hookit | No hole | 250 | 250 |
| 7100190720 | 152 mm | 150+ | Hookit | No hole | 250 | 250 |
| 7100190721 | 152 mm | 120+ | Hookit | No hole | 250 | 250 |
| 7100190726 | 127 mm | 60+ | Hookit | 5-Hole | 250 | 250 |
| 7100190724 | 127 mm | 80+ | Hookit | 5-Hole | 250 | 250 |
| 7100190722 | 127 mm | 120+ | Hookit | 5-Hole | 250 | 250 |
| 7100190725 | 127 mm | 150+ | Hookit | 5-Hole | 250 | 250 |
| 7100190723 | 127 mm | 180+ | Hookit | 5-Hole | 250 | 250 |
| 7100226878 | 152 mm | 60+ | Hookit | 15-Hole | 250 | 250 |
| 7100226892 | 152 mm | 80+ | Hookit | 15-Hole | 250 | 250 |
| 7100226879 | 152 mm | 120+ | Hookit | 15-Hole | 250 | 250 |
| 7100226891 | 152 mm | 150+ | Hookit | 15-Hole | 250 | 250 |
| 7100226890 | 152 mm | 180+ | Hookit | 15-Hole | 250 | 250 |
| 7100226887 | 152 mm | 60+ | Hookit | 17-Hole | 250 | 250 |
| 7100226884 | 152 mm | 80+ | Hookit | 17-Hole | 250 | 250 |
| 7100226886 | 152 mm | 120+ | Hookit | 17-Hole | 250 | 250 |
| 7100226885 | 152 mm | 150+ | Hookit | 17-Hole | 250 | 250 |
| 7100226888 | 152 mm | 180+ | Hookit | 17-Hole | 250 | 250 |

Product Reference – For Random Orbital Sander

3M™ Cubitron™ II Hookit™ Cloth Disc 947A

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100113114 | 76 mm | 40+ | Hookit | No hole | 200 | 200 |
| 7100113109 | 76 mm | 60+ | Hookit | No hole | 200 | 200 |
| 7100113126 | 76 mm | 80+ | Hookit | No hole | 200 | 200 |
| 7100113117 | 76 mm | 120+ | Hookit | No hole | 200 | 200 |
| 7100169959 | 115 mm | 40+ | Hookit | No hole | 200 | 200 |
| 7100169950 | 115 mm | 60+ | Hookit | No hole | 200 | 200 |
| 7100169962 | 115 mm | 80+ | Hookit | No hole | 200 | 200 |
| 7100169949 | 115 mm | 120+ | Hookit | No hole | 200 | 200 |
| 7100113120 | 127 mm | 40+ | Hookit | No hole | 200 | 200 |
| 7100113137 | 127 mm | 60+ | Hookit | No hole | 200 | 200 |
| 7100112980 | 127 mm | 80+ | Hookit | No hole | 200 | 200 |
| 7100085514 | 127 mm | 120+ | Hookit | No hole | 200 | 200 |
| 7100113121 | 152 mm | 40+ | Hookit | No hole | 200 | 200 |
| 7100113142 | 152 mm | 60+ | Hookit | No hole | 200 | 200 |
| 7100113080 | 152 mm | 80+ | Hookit | No hole | 200 | 200 |
| 7100113139 | 152 mm | 120+ | Hookit | No hole | 200 | 200 |
| 7100113118 | 76 mm | 40+ | Hookit | 3-Hole | 200 | 200 |
| 7100113145 | 76 mm | 80+ | Hookit | 3-Hole | 200 | 200 |
| 7100113113 | 76 mm | 120+ | Hookit | 3-Hole | 200 | 200 |
| 7100113110 | 127 mm | 40+ | Hookit | 5-Hole | 200 | 200 |
| 7100113096 | 127 mm | 60+ | Hookit | 5-Hole | 200 | 200 |
| 7100113111 | 127 mm | 80+ | Hookit | 5-Hole | 200 | 200 |
| 7100113075 | 127 mm | 120+ | Hookit | 5-Hole | 200 | 200 |
| 7100113143 | 152 mm | 40+ | Hookit | 6-Hole | 200 | 200 |
| 7100113076 | 152 mm | 60+ | Hookit | 6-Hole | 200 | 200 |
| 7100113107 | 152 mm | 80+ | Hookit | 6-Hole | 200 | 200 |
| 7100113871 | 152 mm | 120+ | Hookit | 6-Hole | 200 | 200 |

Product Reference – For Random Orbital Sander

3M™ Hookit™ Paper Disc 255P

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7000034177 | 125 mm | P80 | Hookit | N/A | 500 | 500 |
| 7000034234 | 125 mm | P120 | Hookit | No hole | 500 | 500 |
| 7000034138 | 127 mm | P150 | Hookit | No hole | 500 | 500 |
| 7000082667 | 125 mm | P180 | Hookit | No hole | 500 | 500 |
| 7000034139 | 127 mm | P220 | Hookit | No hole | 500 | 500 |
| 7000034140 | 125 mm | P240 | Hookit | No hole | 500 | 500 |
| 7000034161 | 125 mm | P320 | Hookit | No hole | 500 | 500 |
| 7000034160 | 125 mm | P400 | Hookit | No hole | 500 | 500 |
| 7000082604 | 152 mm | P80 | Hookit | No hole | 500 | 500 |
| 7000082603 | 152 mm | P100 | Hookit | No hole | 500 | 500 |
| 7100015154 | 152 mm | P120 | Hookit | No hole | 500 | 500 |
| 7000082602 | 152 mm | P150 | Hookit | No hole | 500 | 500 |
| 7000082601 | 152 mm | P180 | Hookit | No hole | 500 | 500 |
| 7000082600 | 152 mm | P220 | Hookit | No hole | 500 | 500 |
| 7000082599 | 152 mm | P240 | Hookit | No hole | 500 | 500 |
| 7100015135 | 152 mm | P320 | Hookit | No hole | 500 | 500 |
| 7000082598 | 150 mm | P360 | Hookit | No hole | 500 | 500 |
| 7000082597 | 152 mm | P400 | Hookit | No hole | 500 | 500 |
| 7000082596 | 152 mm | P500 | Hookit | No hole | 500 | 500 |
| 7000084993 | 150 mm | P800 | Hookit | No hole | 500 | 500 |
| 7000085770 | 150 mm | P400 | Hookit | N/A | 100 | 100 |
| 7000085769 | 150 mm | P500 | Hookit | N/A | 100 | 100 |
| 7000085768 | 150 mm | P600 | Hookit | N/A | 100 | 100 |
| 7000043160 | 77 mm | P400 | Hookit | 6 Hole | 500 | 500 |
| 7000043159 | 77 mm | P800 | Hookit | 6 Hole | 500 | 500 |
| 7000034159 | 127 mm | P80 | Hookit | 5-Hole | 500 | 500 |
| 7000034157 | 125 mm | P120 | Hookit | 5 Hole | 500 | 500 |
| 7000034156 | 127 mm | P150 | Hookit | 5-Hole | 500 | 500 |
| 7000034155 | 127 mm | P180 | Hookit | 5-Hole | 500 | 500 |
| 7000034153 | 127 mm | P320 | Hookit | 5-Hole | 500 | 500 |
| 7000034152 | 127 mm | P400 | Hookit | 5-Hole | 500 | 500 |

Continued...

Product Reference – For Random Orbital Sander

3M™ Hookit™ Paper Disc 255P (Cont.)

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7000034151 | 125 mm | P500 | Hookit | Holed | 500 | 500 |
| 7000034174 | 125 mm | P180 | Hookit | N/A | 500 | 500 |
| 7000034173 | 125 mm | P240 | Hookit | Holed | 500 | 500 |
| 7000034099 | 152 mm | P80 | Hookit | 6-Hole | 500 | 500 |
| 7000034123 | 152 mm | P100 | Hookit | 6-Hole | 500 | 500 |
| 7000034102 | 152 mm | P120 | Hookit | 6-Hole | 500 | 500 |
| 700006851 | 152 mm | P150 | Hookit | 6-Hole | 500 | 500 |
| 7000034098 | 152 mm | P180 | Hookit | 6-Hole | 500 | 500 |
| 7000034122 | 152 mm | P220 | Hookit | 6-Hole | 500 | 500 |
| 700006850 | 152 mm | P240 | Hookit | 6-Hole | 500 | 500 |
| 7000034121 | 152 mm | P280 | Hookit | 6-Hole | 500 | 500 |
| 7000034097 | 152 mm | P320 | Hookit | 6-Hole | 500 | 500 |
| 7000034120 | 150 mm | P360 | Hookit | 6 Hole | 500 | 500 |
| 7000034096 | 152 mm | P400 | Hookit | 6-Hole | 500 | 500 |
| 7000034119 | 152 mm | P500 | Hookit | 6-Hole | 500 | 500 |
| 7000034182 | 150 mm | P600 | Hookit | 6 Hole | 500 | 500 |
| 7000034128 | 152 mm | P80 | Hookit | 9-Hole | 500 | 500 |
| 7000082645 | 152 mm | P100 | Hookit | 9-Hole | 500 | 500 |
| 7000034129 | 152 mm | P120 | Hookit | 9-Hole | 500 | 500 |
| 7000034130 | 152 mm | P150 | Hookit | 9-Hole | 500 | 500 |
| 7000034131 | 152 mm | P180 | Hookit | 9-Hole | 500 | 500 |
| 7000034132 | 152 mm | P220 | Hookit | 9-Hole | 500 | 500 |
| 7000034133 | 152 mm | P240 | Hookit | 9-Hole | 500 | 500 |
| 7000034134 | 150 mm | P280 | Hookit | 9 Hole | 500 | 500 |
| 7000034135 | 152 mm | P320 | Hookit | 9-Hole | 500 | 500 |
| 7000034136 | 152 mm | P400 | Hookit | 9-Hole | 500 | 500 |
| 7000034137 | 152 mm | P500 | Hookit | 9-Hole | 500 | 500 |
| 7000034344 | 152 mm | P80 | Hookit | 15-Hole | 500 | 500 |
| 7000084286 | 150 mm | P100 | Hookit | 15 Hole | 500 | 500 |
| 7000034345 | 152 mm | P120 | Hookit | 15-Hole | 500 | 500 |
| 7000034346 | 152 mm | P150 | Hookit | 15-Hole | 500 | 500 |

Continued...

Product Reference – For Random Orbital Sander

3M™ Hookit™ Paper Disc 255P (Cont.)

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|------|
| 7000034347 | 152 mm | P180 | Hookit | 15-Hole | 500 | 500 |
| 7000034348 | 152 mm | P220 | Hookit | 15-Hole | 500 | 500 |
| 7000084287 | 152 mm | P240 | Hookit | 15-Hole | 500 | 500 |
| 7000034349 | 150 mm | P280 | Hookit | 15 Hole | 500 | 500 |
| 7000034350 | 152 mm | P320 | Hookit | 15-Hole | 500 | 500 |
| 7000084288 | 150 mm | P360 | Hookit | 15 Hole | 500 | 1000 |
| 7000034351 | 150 mm | P400 | Hookit | 15 Hole | 500 | 500 |
| 7000084289 | 150 mm | P600 | Hookit | 15 Hole | 500 | 500 |
| 7000034485 | 152 mm | P800 | Hookit | 15-Hole | 500 | 500 |
| 7000085780 | 150 mm | P80 | Hookit | N/A | 100 | 100 |
| 7000085778 | 150 mm | P120 | Hookit | N/A | 100 | 100 |
| 7000085776 | 150 mm | P180 | Hookit | N/A | 100 | 100 |
| 7000085774 | 150 mm | P240 | Hookit | N/A | 100 | 100 |
| 710017281 | 150mm | P280 | Hookit | N/A | 500 | 500 |
| 7000082545 | 203 mm | P120 | Hookit | 8-Hole | 250 | 250 |
| 7000082543 | 203 mm | P180 | Hookit | 8-Hole | 250 | 250 |
| 7000034352 | 150 mm | P500 | Hookit | Gold | 500 | 500 |
| 7000034154 | 125 mm | P240 | Hookit | N/A | 500 | 500 |
| 7000082554 | 203 mm | P320 | Hookit | Gold | 250 | 250 |
| 7000082646 | 150 mm | P360 | Hookit | Gold | 500 | 500 |
| 7100142541 | | | Hookit | N/A | | 1000 |

Scotch-Brite™ Hookit™ Cut and Polish Disc

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7000121099 | 127 mm | A MED | Hookit | No hole | 40 | 40 |
| 7100138343 | 152 mm | A MED | Hookit | No hole | 40 | 40 |

Product Reference – For Random Orbital Sander

Scotch-Brite™ Hookit™ Production Clean and Finish Disc

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|------|
| 7100138328 | 127 mm | A VFN | Hookit | No hole | 40 | 40 |
| 7100046176 | 127 mm | A VFN | Hookit | No hole | 40 | 1520 |
| 7100138329 | 150 mm | A VFN | Hookit | N/A | 40 | 40 |

3M™ Finesse-it™ Refining FR-DC Disc 3000

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100042004 | 127 mm | 3000 | No hole | No hole | 20 | 80 |
| 7100042005 | 150 mm | 3000 | No hole | No hole | 20 | 80 |

Scotch-Brite™ Hookit™ Clean and Finish CF-HA Disc

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|--------------|---------------|--------------|------------|-----|
| 7100138330 | 150 mm | S ultra fine | Hookit | No hole | 40 | 40 |

Scotch-Brite™ Hookit™ 7447 PRO PO-HA Disc

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------------|---------------|--------------|------------|-----|
| 7010329332 | 127 mm | A very fine | Hookit | No hole | 40 | 40 |
| 7010300879 | 150 mm | A very fine | Hookit | No hole | 40 | 40 |

Scotch-Brite™ Hookit™ 7448 PRO PO-HA Disc

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|--------------|---------------|--------------|------------|-----|
| 7010310033 | 150 mm | S ultra fine | Hookit | No hole | 40 | 40 |
| 7010365704 | 127 mm | S ultra fine | Hookit | No hole | 40 | 40 |

Product Reference – For Random Orbital Sander

3M™ Hookit™ Film Disc 375L

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|------|
| 7000045381 | 12.7 mm | P600 | Hookit | No hole | 250 | 250 |
| 7000045382 | 12.7 mm | P800 | Hookit | No hole | 250 | 250 |
| 7000045400 | 12.7 mm | N/A | Hookit | No hole | 250 | 250 |
| 7000045401 | 12.7 mm | P1200 | Hookit | No hole | 250 | 250 |
| 7000045384 | 15.24 mm | P800 | Hookit | No hole | 250 | 250 |
| 7000045405 | 15.24 mm | P1000 | Hookit | No hole | 250 | 250 |
| 7000045406 | 15.24 mm | P1200 | Hookit | No hole | 250 | 250 |
| 7000045407 | 15.24 mm | P1500 | Hookit | No hole | 250 | 250 |
| 7010518108 | 76.2 mm | P800 | Hookit | No hole | N/A | 1 |
| 7010537280 | 76.2 mm | P1200 | Hookit | No hole | N/A | 1 |
| 7100106749 | 127 mm | P180 | Hookit | No hole | 250 | 50 |
| 7100106649 | 127 mm | P240 | Hookit | No hole | 250 | 50 |
| 7100106637 | 127 mm | P400 | Hookit | No hole | 250 | 500 |
| 7100106631 | 150 mm | P80 | Hookit | No hole | 250 | 250 |
| 7100106585 | 150 mm | P100 | Hookit | No hole | 250 | 250 |
| 7100106586 | 150 mm | P120 | Hookit | No hole | 250 | 250 |
| 7100106620 | 150 mm | P180 | Hookit | No hole | 250 | 250 |
| 7100106625 | 150 mm | P240 | Hookit | No hole | 250 | 250 |
| 7100106632 | 150 mm | P320 | Hookit | No hole | 250 | 250 |
| 7100106630 | 150 mm | P400 | Hookit | No hole | 250 | 250 |
| 7000045404 | 150 mm | P500 | Hookit | No hole | 250 | 250 |
| 7000045383 | 150 mm | P600 | Hookit | No hole | 250 | 250 |
| 7000045421 | 150 mm | P600 | Hookit | 15 Hole | 250 | 250 |
| 7000045423 | 150 mm | P800 | Hookit | 15 Hole | 250 | 250 |
| 7000045413 | 150 mm | P1000 | Hookit | 15 Hole | 250 | 250 |
| 7000045414 | 150 mm | P1200 | Hookit | 15 Hole | 250 | 250 |
| 7000045415 | 150 mm | P1500 | Hookit | 15 Hole | 250 | 250 |
| 7100086041 | 150 mm | P600 | Hookit | No hole | 500 | 500 |
| 7100086042 | 150 mm | P800 | Hookit | No hole | 500 | 6000 |
| 7100106760 | 150 mm | P60 | Hookit | No hole | 250 | 50 |
| 7100106750 | 150 mm | P80 | Hookit | No hole | 250 | 250 |

Continued...

Product Reference – For Random Orbital Sander

3M™ Hookit™ Film Disc 375L (Cont.)

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7100106758 | 150 mm | P100 | Hookit | No hole | 250 | 50 |
| 7100106757 | 150 mm | P120 | Hookit | No hole | 250 | 50 |
| 7100106658 | 150 mm | P180 | Hookit | No hole | 250 | 50 |
| 7100106659 | 150 mm | P220 | Hookit | No hole | 250 | 50 |
| 7100106638 | 150 mm | P240 | Hookit | No hole | 250 | 250 |
| 7100106636 | 150 mm | P320 | Hookit | No hole | 250 | 250 |

3M Xtract™ Film Disc 360L

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|------|
| 7100140894 | 76 mm | P400 | Hookit | N/A | 1000 | 1000 |
| 7100136897 | 76 mm | P600 | Hookit | 300M | 1000 | 1000 |
| 7100112430 | 76 mm | P800 | Hookit | N/A | 1000 | 1000 |
| 7100084760 | 76 mm | P400 | Hookit | 300LG | 500 | 500 |
| 7100010261 | 76 mm | P600 | Hookit | 300LG | 500 | 500 |
| 7100010263 | 76 mm | P1000 | Hookit | 300LG | 500 | 500 |
| 7010029936 | 127 mm | P240 | Hookit | N/A | 500 | 500 |
| 7010029938 | 127 mm | P600 | Hookit | 500LG | 500 | 500 |
| 7010029939 | 127 mm | P800 | Hookit | N/A | 500 | 500 |
| 7000045589 | 127 mm | P240 | Hookit | No hole | 500 | 500 |
| 7010325748 | 127 mm | P400 | Hookit | No hole | 500 | 500 |
| 7100142948 | 127 mm | P400 | Hookit | No hole | 500 | 500 |
| 7100077620 | 152 mm | P220 | Hookit | N/A | 500 | 500 |
| 7100077621 | 152 mm | P240 | Hookit | 600LG | 500 | 500 |
| 7010029944 | 152 mm | P280 | Hookit | N/A | 500 | 500 |
| 7100077622 | 152 mm | P320 | Hookit | 600LG | 500 | 500 |
| 7100077623 | 152 mm | P400 | Hookit | N/A | 500 | 500 |
| 7100077624 | 152 mm | P500 | Hookit | N/A | 500 | 500 |
| 7100077625 | 152 mm | P600 | Hookit | N/A | 500 | 500 |
| 7100077626 | 152 mm | P800 | Hookit | N/A | 500 | 500 |
| 7100077975 | 152 mm | P1000 | Hookit | N/A | 500 | 500 |

Product Reference – For Random Orbital Sander

3M Xtract™ Paper Disc 236U

| Stock ID (code) | Diameter | Grade | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|-------|---------------|--------------|------------|-----|
| 7000119599 | 76 mm | P80 | Hookit | 300LG | 250 | 250 |
| 7000119602 | 76 mm | P150 | Hookit | 300LG | 250 | 250 |
| 7000119605 | 76 mm | P240 | Hookit | 300LG | 250 | 250 |
| 7000119606 | 76 mm | P320 | Hookit | 300LG | 250 | 250 |
| 7000119607 | 76 mm | P400 | Hookit | 300LG | 250 | 250 |
| 7000119608 | 76 mm | P500 | Hookit | 300LG | 250 | 250 |
| 7010029932 | 127 mm | P240 | Hookit | N/A | 250 | 250 |
| 7010029933 | 127 mm | P320 | Hookit | N/A | 250 | 250 |
| 7010029934 | 127 mm | P400 | Hookit | N/A | 250 | 250 |
| 7010029935 | 127 mm | P500 | Hookit | 500LG | 250 | 250 |
| 7100078152 | 152 mm | P80 | Hookit | P80 | 250 | 250 |
| 7100078154 | 152 mm | P120 | Hookit | No hole | 250 | 250 |
| 7100078156 | 152 mm | P180 | Hookit | No hole | 250 | 250 |
| 7100078153 | 152 mm | P100 | Hookit | 600LG | 250 | 250 |
| 7100078155 | 152 mm | P150 | Hookit | N/A | 250 | 250 |
| 7100078157 | 152 mm | P220 | Hookit | 600LG | 250 | 250 |
| 7100078158 | 152 mm | P240 | Hookit | N/A | 250 | 250 |
| 7100078159 | 152 mm | P320 | Hookit | N/A | 250 | 250 |
| 7100078180 | 152 mm | P400 | Hookit | 600LG | 250 | 250 |
| 7100078181 | 152 mm | P500 | Hookit | 600LG | 250 | 250 |

3M™ Hookit™ Clean sanding Low profile Disc Pad

| Stock ID (code) | Diameter | Fixing system | Hole config. | Case units | MOQ |
|-----------------|----------|---------------|---------------------|------------|-----|
| 7000028147 | 76 mm | Hookit | Low profile | 10 | 10 |
| 7100037832 | 127 mm | Hookit | Low profile 44 hole | 10 | 10 |
| 7100027464 | 152 mm | Hookit | Low profile 52 hole | 10 | 1 |

Product Reference – For Random Orbital Sander

3M™ Hookit™ D/F Disc Pad

| Stock ID (code) | Diameter | Fixing system | Product description | Case units | MOQ |
|-----------------|----------|---------------|--|------------|-----|
| 7100028484 | 125 mm | Hookit | Low profile finishing, 125 mm x 17 mm, 6/16-24 ExterN/Al | 10 | 1 |
| 7100032506 | 125mm | Hookit | 5 in x3/4 in5/16-24 ExterN/Al5 Holes | 10 | 10 |

3M™ Self-generated Vacuum Random Orbital Sander

| Stock ID (code) | Diameter | Orbit | Vacuum | Case units | MOQ | Comment |
|-----------------|---------------|--------------|----------------|------------|-----|-----------|
| 7000060301 | 70 mm x198 mm | 3 mm orbit | Self-generated | 1 | 1 | |
| 7000032234 | 125 mm | 2.5 mm orbit | Self-generated | 1 | 1 | Phase out |
| 7000032233 | 127 mm | 5 mm orbit | Self-generated | 1 | 1 | Phase out |
| 7000032236 | 152 mm | 2.5 mm orbit | Self-generated | 1 | 1 | Phase out |
| 7000032232 | 152 mm | 8 mm orbit | Self-generated | 1 | 1 | Phase out |

3M Xtract™ Pneumatic Random Orbital Sander

| Stock ID (code) | Diameter | Orbit | Vacuum | Case units | MOQ | Comment |
|-----------------|----------|--------------|----------------|------------|-----|-------------|
| 7100258112 | 125 mm | 2.5 mm orbit | Self-generated | 1 | 1 | Coming soon |
| 7100258783 | 125 mm | 5 mm orbit | Self-generated | 1 | 1 | Coming soon |
| 7100258708 | 150 mm | 2.5 mm orbit | Self-generated | 1 | 1 | Coming soon |
| 7100258798 | 150 mm | 5 mm orbit | Self-generated | 1 | 1 | Coming soon |
| 7100259323 | 150 mm | 8 mm orbit | Self-generated | 1 | 1 | Coming soon |

Product Reference – For Random Orbital Sander

3M™ Central Vacuum Random Orbital Sander Elite Series

| Stock ID (code) | Diameter | Orbit | Vacuum | Case units | MOQ | Comment |
|-----------------|---------------|--------------|----------------|------------|-----|-------------|
| 7000060297 | 70 mm x198 mm | 3.2 mm orbit | Central vacuum | 1 | 1 | |
| 7000032227 | 76 mm | 2.5 mm orbit | Central vacuum | 1 | 1 | |
| 7000060295 | 76 mm | 5 mm orbit | Central vacuum | 1 | 1 | |
| 7000032229 | 127 mm | 2.5 mm orbit | Central vacuum | 1 | 1 | Phase out |
| 7000032228 | 127 mm | 5 mm orbit | Central vacuum | 1 | 1 | Phase out |
| 7000032226 | 152 mm | 8 mm orbit | Central vacuum | 1 | 1 | Phase out |
| 7100258884 | 127 mm | 2.5 mm orbit | Central vacuum | 1 | 1 | Coming soon |
| 7100258886 | 127 mm | 5 mm orbit | Central vacuum | 1 | 1 | Coming soon |
| 7100259232 | 152 mm | 2.5 mm orbit | Central vacuum | 1 | 1 | Coming soon |
| 7100258801 | 152 mm | 5 mm orbit | Central vacuum | 1 | 1 | Coming soon |
| 7100258707 | 152 mm | 8 mm orbit | Central vacuum | 1 | 1 | Coming soon |

3M Xtract™ Electric Random Orbital Sander (240V)

| Stock ID (code) | Diameter | Orbit | Vacuum | Plug type | Case units | MOQ | Comment |
|-----------------|----------|--------------|----------------|-------------|------------|-----|------------------------|
| 7100263555 | 125 mm | 5 mm orbit | Central vacuum | Plug type E | 1 | 1 | Coming soon EU version |
| 7100263558 | 150 mm | 5 mm orbit | Central vacuum | Plug type E | 1 | 1 | Coming soon EU version |
| 7100263559 | 125 mm | 2.5 mm orbit | Central vacuum | Plug type E | 1 | 1 | Coming soon EU version |
| 7100263549 | 150 mm | 2.5 mm orbit | Central vacuum | Plug type E | 1 | 1 | Coming soon EU version |
| 7100263525 | 125 mm | 5 mm orbit | Central vacuum | Plug type G | 1 | 1 | Coming soon UK version |
| 7100263554 | 150 mm | 5 mm orbit | Central vacuum | Plug type G | 1 | 1 | Coming soon UK version |
| 7100263528 | 125 mm | 2.5 mm orbit | Central vacuum | Plug type G | 1 | 1 | Coming soon UK version |
| 7100263530 | 150 mm | 2.5 mm orbit | Central vacuum | Plug type G | 1 | 1 | Coming soon UK version |

3M Xtract™ Portable Dust Extractor

| Stock ID (code) | Type | Plug type | Case units | MOQ | Comment |
|-----------------|------|--------------------|------------|-----|------------------------|
| 7100259732 | 240V | Plug type E | 1 | 1 | Coming soon EU version |
| 7100260424 | 110V | Plug type EN 60309 | 1 | 1 | Coming soon UK version |

Product Reference – Roloc™ Products

3M™ Cubitron™ II Roloc™ Fibre Disc 982C

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|----------|-------|------------|-----|
| 7000118429 | 50 mm | 36+ | 200 | 200 |
| 7000118431 | 50 mm | 60+ | 200 | 200 |
| 7000118432 | 50 mm | 80+ | 200 | 200 |
| 7000044902 | 76 mm | 60+ | 200 | 200 |
| 7000044904 | 76 mm | 80+ | 200 | 200 |
| 7100126838 | 76 mm | 36+ | 200 | 200 |
| 7000118430 | 76mm | 36+ | 200 | 200 |
| 7100006575 | 100 mm | 36+ | 100 | 100 |
| 7100084495 | 100 mm | 36+ | 100 | 100 |

3M™ Cubitron™ II Roloc™ Cloth Disc 984F

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|----------|-------|------------|-----|
| 7000045233 | 25 mm | 60+ | 200 | 200 |
| 7000144102 | 26 mm | 80+ | 200 | 200 |
| 7000045166 | 38 mm | 36+ | 200 | 200 |
| 7000045171 | 38 mm | 60+ | 200 | 200 |
| 7000045175 | 38 mm | 80+ | 200 | 200 |
| 7000045168 | 38 mm | 36+ | 200 | 200 |
| 7000045177 | 38 mm | 80+ | 200 | 200 |
| 7100001474 | 50 mm | 36+ | 200 | 200 |
| 7100001475 | 50 mm | 60+ | 200 | 200 |
| 7010361116 | 50 mm | 60+ | 200 | 200 |
| 7100001473 | 50 mm | 80+ | 200 | 200 |
| 7000045173 | 50 mm | 60+ | 200 | 200 |
| 7000045178 | 50 mm | 80+ | 200 | 200 |
| 7000045167 | 76 mm | 36+ | 200 | 200 |
| 7000045172 | 76 mm | 60+ | 200 | 200 |
| 7000045176 | 76 mm | 80+ | 200 | 200 |

Product Reference – Roloc™ Products

Scotch-Brite™ Roloc™ Precision Surface Conditioning Disc PN-DR

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|----------|--------------|------------|------|
| 7100270872 | 101.6 mm | Extra Coarse | 100 | 100 |
| 7100264203 | 101.6 mm | Coarse | 100 | 100 |
| 7100264142 | 101.6 mm | Medium | 100 | 100 |
| 7100264204 | 101.6 mm | Fine | 100 | 100 |
| 7100264199 | 101.6 mm | Very Fine | 100 | 100 |
| 7100264150 | 25.4 mm | Extra Coarse | 200 | 200 |
| 7100271028 | 25.4 mm | Coarse | 200 | 200 |
| 7100264161 | 25.4 mm | Medium | 200 | 200 |
| 7100264159 | 25.4 mm | Fine | 200 | 200 |
| 7100264156 | 25.4 mm | Very Fine | 200 | 200 |
| 7100264165 | 38.1 mm | Extra Coarse | 100 | 100 |
| 7100264170 | 38.1 mm | Extra Coarse | 200 | 200 |
| 7100264164 | 38.1 mm | Coarse | 100 | 100 |
| 7100264169 | 38.1 mm | Coarse | 200 | 200 |
| 7100264163 | 38.1 mm | Medium | 100 | 100 |
| 7100264168 | 38.1 mm | Medium | 200 | 200 |
| 7100264152 | 38.1 mm | Fine | 100 | 100 |
| 7100264167 | 38.1 mm | Fine | 200 | 200 |
| 7100264151 | 38.1 mm | Very Fine | 100 | 100 |
| 7100264166 | 38.1 mm | Very Fine | 200 | 200 |
| 7100264091 | 50.8 mm | Extra Coarse | 200 | 200 |
| 7100264172 | 50.8 mm | Extra Coarse | 100 | 100 |
| 7100264193 | 50.8 mm | Extra Coarse | Bulk | Bulk |
| 7100264090 | 50.8 mm | Coarse | 200 | 200 |
| 7100264092 | 50.8 mm | Coarse | Bulk | Bulk |
| 7100272236 | 50.8 mm | Coarse | 100 | 100 |
| 7100264089 | 50.8 mm | Medium | 200 | 200 |
| 7100264141 | 50.8 mm | Medium | Bulk | Bulk |
| 7100272016 | 50.8 mm | Medium | 100 | 100 |
| 7100264139 | 50.8 mm | Fine | Bulk | Bulk |
| 7100264171 | 50.8 mm | Fine | 100 | 100 |

Continued...

Product Reference – Roloc™ Products

Scotch-Brite™ Roloc™ Precision Surface Conditioning Disc PN-DR (Cont.)

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|----------|--------------|------------|------|
| 7100264174 | 50.8 mm | Fine | 200 | 200 |
| 7100264138 | 50.8 mm | Very Fine | Bulk | Bulk |
| 7100264173 | 50.8 mm | Very Fine | 200 | 200 |
| 7100272237 | 50.8 mm | Very Fine | 100 | 100 |
| 7100264198 | 76.2 mm | Extra Coarse | 100 | 100 |
| 7100264438 | 76.2 mm | Extra Coarse | Bulk | Bulk |
| 7100264427 | 76.2 mm | Coarse | Bulk | Bulk |
| 7100264197 | 76.2 mm | Coarse | 100 | 100 |
| 7100264196 | 76.2 mm | Medium | 100 | 100 |
| 7100264428 | 76.2 mm | Medium | Bulk | Bulk |
| 7100264195 | 76.2 mm | Fine | 100 | 100 |
| 7100271030 | 76.2 mm | Fine | Bulk | Bulk |
| 7100264194 | 76.2 mm | Very Fine | 100 | 100 |
| 7100264429 | 76.2 mm | Very Fine | Bulk | Bulk |

Scotch-Brite™ Roloc™ Surface Conditioning Disc SC-DR

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|----------|--------------|------------|-----|
| 7000000704 | 25 mm | A Coarse | 200 | 200 |
| 7000021280 | 25 mm | A Medium | 200 | 200 |
| 7000021279 | 25 mm | A Very Fine | 200 | 200 |
| 7000000752 | 50 mm | A Coarse | 200 | 200 |
| 7000000751 | 50 mm | A Medium | 200 | 200 |
| 7000000750 | 50 mm | A Very Fine | 200 | 200 |
| 7000000753 | 50 mm | S Super Fine | 200 | 200 |
| 7000000756 | 76 mm | A Coarse | 100 | 100 |
| 7000000755 | 76 mm | A Medium | 100 | 100 |
| 7000000754 | 76 mm | A Very Fine | 100 | 100 |
| 7000028501 | 76 mm | S Super Fine | 100 | 100 |

Product Reference – Roloc™ Products

Scotch-Brite™ Roloc™ Light Grinding and Blending Disc GB-DR

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|----------|---------------------|------------|-----|
| 7100019197 | 25 mm | A Coarse Super Duty | 200 | 200 |
| 7000046250 | 50 mm | A Coarse Heavy Duty | 200 | 200 |
| 7000046251 | 50 mm | A Coarse Super Duty | 200 | 200 |
| 7100007318 | 76 mm | A Coarse Heavy Duty | 100 | 100 |
| 7100009310 | 76 mm | A Coarse Super Duty | 100 | 100 |

Scotch-Brite™ Roloc™ Clean and Strip XT Pro Disc

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|----------|--------|------------|-----|
| 7100175521 | 50 mm | S XCRS | 60 | 10 |
| 7100173795 | 76 mm | S XCRS | 40 | 10 |

Scotch-Brite™ Roloc™ Bristle Disc RD-ZB

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|-------------------|-------|------------|-----|
| 7000000740 | 25.4 mm x 15.8 mm | P50 | 80 | 80 |
| 7000000741 | 25.4 mm x 15.8 mm | P120 | 80 | 80 |
| 7100138285 | 50 mm x 15.8 mm | P50 | 40 | 40 |
| 7100138284 | 50 mm x 15.8 mm | P80 | 40 | 160 |
| 7100138319 | 50 mm x 15.8 mm | P80 | 80 | 80 |
| 7100138286 | 50 mm x 15.8 mm | P120 | 40 | 40 |
| 7100138305 | 76 mm x 15.8mm | P50 | 40 | 840 |
| 7100138307 | 76 mm x 15.8mm | P80 | 40 | 840 |
| 7100138306 | 76 mm x 15.8mm | P120 | 40 | 880 |

Product Reference – Roloc™ Products

3M™ Roloc™ Fibre Disc 787C

| Stock ID (code) | Diameter | Grade | Case units | MOQ |
|-----------------|----------|-------|------------|-----|
| 7100100974 | 50 mm | 36+ | 200 | 200 |
| 7100100982 | 50 mm | 60+ | 200 | 200 |
| 7100100962 | 50 mm | 80+ | 200 | 200 |
| 7100100964 | 50 mm | 120+ | 200 | 200 |
| 7100100981 | 75 mm | 36+ | 200 | 200 |
| 7100100979 | 75 mm | 60+ | 200 | 200 |
| 7100100966 | 75 mm | 120+ | 200 | 200 |
| 7100100976 | 50 mm | 36+ | 200 | 200 |
| 7100100989 | 50 mm | 60+ | 200 | 200 |
| 7100100999 | 50 mm | 80+ | 200 | 200 |
| 7100100942 | 76 mm | 36+ | 200 | 200 |
| 7100100885 | 76 mm | 60+ | 200 | 200 |
| 7100100961 | 76 mm | 80+ | 200 | 200 |
| 7100100986 | 76 mm | 80+ | 200 | 200 |

3M United Kingdom PLC

3M Centre
Cain Road
Bracknell
RG12 8HT
Tel: 0845 504 8772
abrasives.uk@mmm.com
www.3M.co.uk/abrasives

3M Ireland Limited

The Iveagh Building
Carrickmines Park
Carrickmines
Dublin 18
Tel: 1 800 320 500

DISCLAIMER: The information in this guide is based on 3M's experience of similar processes and applications and is correct to the best of our knowledge at the date of publication, but we do not accept any liability for any loss, damage or injury resulting from reliance on the statements contained in this guide (except as required by law). Because of the wide variety of processes and conditions in which these products may be used, it is important that customers carry out their own test(s) to evaluate 3M products before use and satisfy themselves as to the suitability of any 3M product(s) for their own intended applications. This document should be used for guidance only, it is not a substitute for a full risk assessment. 3M occupational and industrial products are intended, labelled, and packaged for sale to trained occupational and industrial customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labelled, or packaged for sale to or use by consumers (e.g. for home, personal, school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with applicable health and safety standards, as well as all product literature, user instructions, warnings, and limitations. Misuse of 3M occupational and industrial products may result in injury, sickness, or death. For further information relating to 3M products please visit www.3M.co.uk/abrasives

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Hand Tools](#) category:

Click to view products by [3M](#) manufacturer:

Other Similar products are found below :

[58284-1](#) [59773-1](#) [662908-1](#) [68764-0001](#) [690619-6](#) [7-354778-7](#) [768531-1](#) [810131](#) [81541-16](#) [854183-1](#) [854358-1](#) [90855-1](#) [992258-1](#) [1-21046-3](#) [121073-0047](#) [1-22278-0](#) [1-22278-2](#) [1-24954-2](#) [125529-5](#) [126513-1](#) [1-305579-8](#) [1-306027-0](#) [1338968-2](#) [1-354779-0](#) [1-354779-2](#) [1-354779-4](#) [1424443-1](#) [1424266-1](#) [1424289-1](#) [1424444-1](#) [1532195-2](#) [1538773-2](#) [1-692134-3](#) [HT-920A-124-HTELE-RPL-KIT](#) [1976923-1](#) [1976969-1](#) [2063795-1](#) [2-21002-1](#) [2-21002-4](#) [2-21002-7](#) [2-21002-9](#) [2-21004-0](#) [229707-1](#) [911737-2](#) [91348-2](#) [925980-R](#) [301185-9](#) [983533-1](#) [1-694433-7](#) [AD-1547-1-INSTALL-TOOL](#)