
3M[™] Pin Strip Header

.100" and .100" x .100", .093" Mating Length, Straight, Solder Tails

929 Series



- Low profile for close board stacking
- Solder stand-offs to facilitate production wave solder and board cleaning
- Board pin retention feature available
- See the Regulatory Information Appendix (RIA) in the "RoHS Compliance" section of www.3Mconnectors.com for compliance information.

Date Modified: February 3, 2012

TS-0816-B Sheet 1 of 2

Physical

Insulation:

Material: Glass Filled Polyester (PBT) or PCT

Flammability: UL 94V-0

Color: Black

Contact:

Material: Copper Alloy

Plating:

 $\label{eq:Underplating: 50 mm} Underplating: 50 \ \mu \ [\ 1.27 \ \mu m\] \ Nickel$ Wiping Area & Solder Tails: See ordering information

Marking: None

Electrical

Current Rating: 2.5 A

Insulation Resistance: $> 5 \times 10^9 \,\Omega$ at $500 \,V_{DC}$ **Withstanding Voltage:** $1500 \,V_{RMS}$ at Sea Level

Environmental

Temperature Rating: -40°C to +105°C


Process Rating: PCT Insulator: 260°C per J-STD-020

PBT Insulator: Maximum insulator temperature 191°C for solder wave process only

Moisture Sensitivity Level: 1 (per J-STD-020C) for PCT insulator only

UL File No.: E68080

.100" and .100" x .100", .093" Mating Length, Straight, Solder Tails

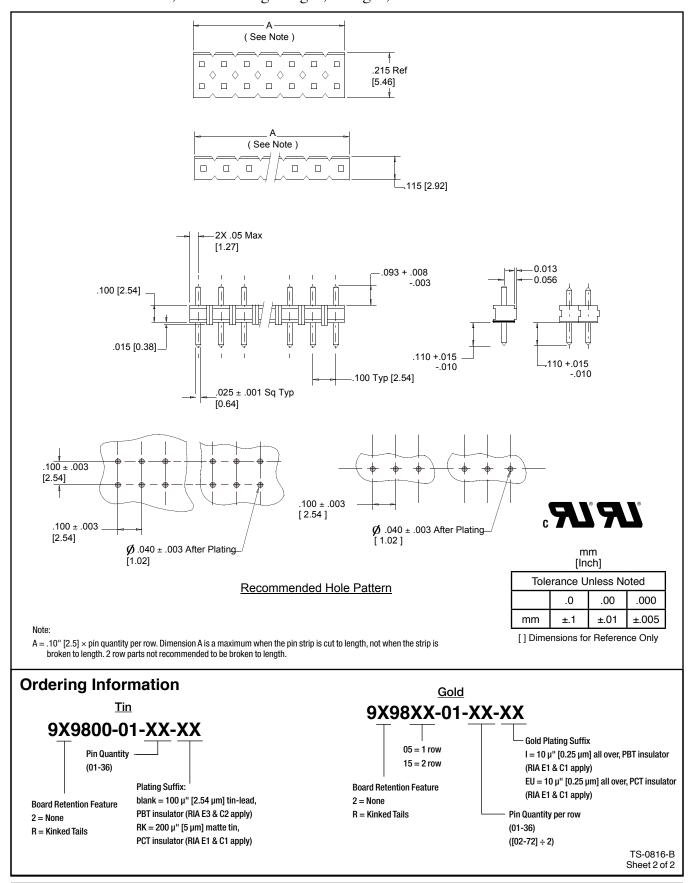

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.



3M Electronics Solutions Division

6801 River Place Blvd. Austin, TX 78726-9000 U.S.A. 1-800-225-5373 www.3Mconnectors.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for 3M manufacturer:

Other Similar products are found below:

SC401U 98-0003-3071-6 FP301-3/16-48"-RED-HDR-25 PCS 929665-01-03-EU 929710-10-07-RK N3428-6003RB 2516-6002UG 00-054007-70220-7 00-054007-34717-0 021200-40230 6-5-F9460PC 6840-2X50-GRAY 701-W FDV14-187C FE-5100-5290-8 812510-100 8204-3LFM MNG14BCX FP301-1-6"-Clear FP301-1/8-6"-Black FP301-2-48"-Black-Bulk FV14-6C 920102-01-25-R 923835-BK-C 927739-40 929835-01-28-RK 929974-01-40-R 951240-2520-AR-PR 960X/980X 98-0003-3075-7 1/2-5-5430 1/2-5-850S 1/2-5-3431 1/2-5-850R 12X12-6-4056B 12X12-6-433 12X12-6-4930 13-38-P 13-500-NB 1-4-4658F DSTK9013-3420 DSTK9015-3402 14B26-SZLB-A00-0LC 14T50-SZWB-100-0NC 152244-0110-GB 1-5-3437 1-5-4496W 1-5-4943F 1-5-363 1-5-5451