# 3M<sup>™</sup> Boardmount Socket

2 mm and 2 mm x 2 mm Straight, Solder Tail

950 Series

- Maximizes use of PC board spaceHigh temperature dielectric
- "No lead" wave and reflow solder compatible
- Single- and dual row design, 2–40 pins or 4–80 pins
- Mates with pin-strip header products
- RoHS Compliant. See the Regulatory Information Appendix (RIA) in the "RoHS compliance" section of www.3Mconnectors.com for compliance information (RIA E1 & C1 apply)



Date Modified: November 21, 2014

TS-2155-E Sheet 1 of 2

## **Physical**

#### **Insulation:**

Material: High Temperature Therropla

Flammability: UL 94V-0

Color: Black

Contact: Copper Allo

Material:

**Plating:** 

Underplating: \_\_\_\_\_ m [100 \mu"] Nickel

Wiping Are Fla Gold

Solder Tail  $\lambda$  ea:  $\frac{1}{3} \mu m \left[40-118 \mu^{2}\right]$  Matte Tin

## **Electrical**

Rating: 1A

Insultion Assistance:  $> 5 \times 10_8$  Ohm at 100 VDC

wh. tanding Voltage: 1000 V sition Resistance: ≤20 mOhm

## **Environmental**


**Temperature Range:** -40°C to +105°C


**Processing Temperature:** max. 260 °C (Profile per J-STD-020C)

**Moisture Sensitivity Level:** 1 (per J-STD-020C)

UL File No.: E68080

2 mm and 2 mm x 2 mm Straight, Solder Tail

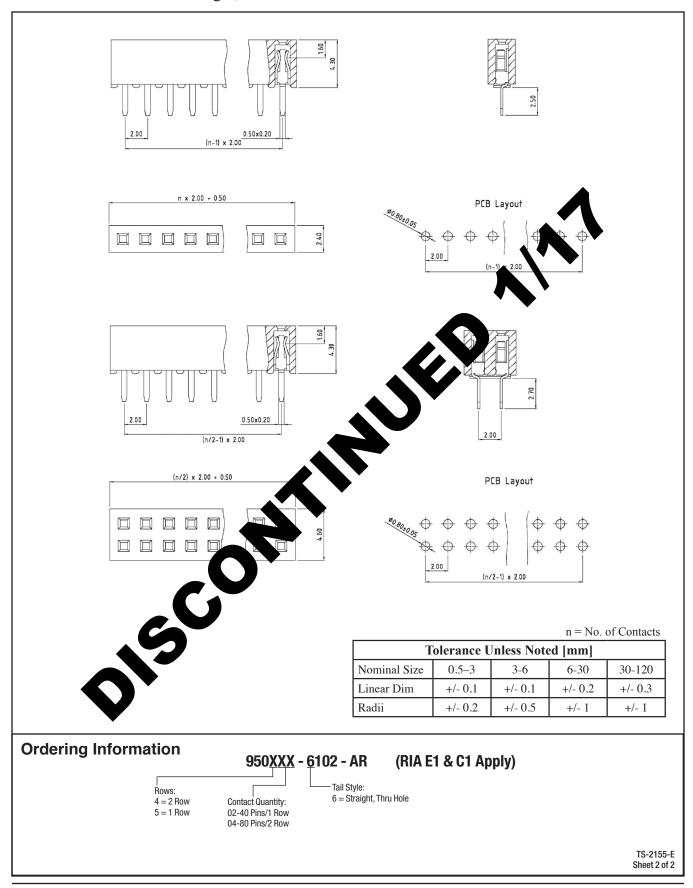

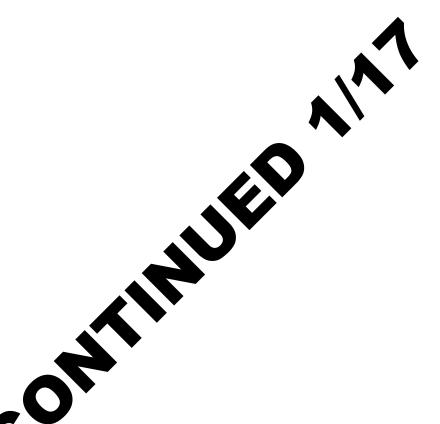

3M is a trademark of 3M Company.

### **Important Notice**

All statements, technical information and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements remains a formation believed to be reliable, but the accuracy or completeness is not guaranteed. Before using the product you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements remains a contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect these expenses expenses and another intended application.

## Warranty; Limited Linear Lhaned Liability.

This product will be from efects in material and manufacture for a period of one (1) year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.



#### **Electronic Materials Solutions Division**

6801 River Place Blvd. Austin, TX 78726-9000 U.S.A. 1-800-225-5373 www.3Mconnectors.com

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings category:

Click to view products by 3M manufacturer:

Other Similar products are found below:

95000-104TRLF 10135584-644402LF DF62W-EP2022PCA 95000-106TRLF DF62W-2022SCA DF62W-EP2022PC 2203348 DF62W-2022SC 1084018 1029039 1084017 802-10-012-10-002000 1112640 1112639 000-34000 0009482033 0009507031 57102-S06-03LF 57202-S52-04LF PCN6-15S-2.5E 0039019024 58102-G61-06LF 582553-1 0009508121 0022285053 0050291907 018731A LY20-4P-DT1-P1E-BR 02.125.8002.8 60101931 60598-1 (Cut Strip) M1625-3R/100 61062-3 61082-181009 636-1427 638009-1 641938-9 641991-4 644168-1 644827-2 647662-1 65039-019ELF 65817-002LF 65817-015LF 65863-015LF 66207-023LF 67016-026LF 67046-001LF 67095-007LF 68002-116