
3M[™] Through-Board Socket

2 mm x 2 mm Straight, Dual Entry, Solder Tail

953 Series

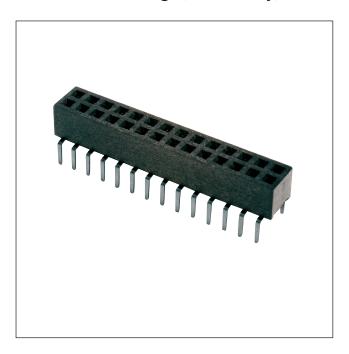

- Optimizes use of PC board space
- High temperature dielectric
- "No lead" wave and reflow solder compatible
- Dual row design, 4–80 pins
- Minimized PC Board stacking heights
- Mates with pin-strip header products
- RoHS Compliant. See the Regulatory Information Appendix (RIA) in the RoHS compliant section of www.3Mconnectors.com for compliant information (RIA E1 & C1 apply)

Date Modified: November

TS-2162-D Sheet 1 of 2

Physical

Insulation

Material: High Temperature Thermoplasti

Flammability: UL 94V-0 Color: Black

Contact

Material: Copper Alloy

Plating

Underplating: $1.25-2.5 \mu \text{m}$ [50] W μ] Nickel

Wiping Area: Flash Gol

Solder Tail Area: 1–3 μm 2–11 μ"] Matte Tin

Electrical

Current Rang:

Insulation Resistant $> 5 \times 10^8 \text{ Ohm at } 100 \text{ V}_{DC}$

Withstand $V_{\rm DC}$ $V_{\rm DC}$ $V_{\rm DC}$ Transition is nee: $\leq 20~{\rm mOhm}$

Environmental


Temperature Range: -40 °C to +105 °C


Processing Temperature: max. 260 °C (Profile per J-STD-020C)

Moisture Sensitivity Level: 1 (per J-STD-020C)

UL File No.: E68080

2 mm x 2 mm Straight, Dual Entry, Solder Tail

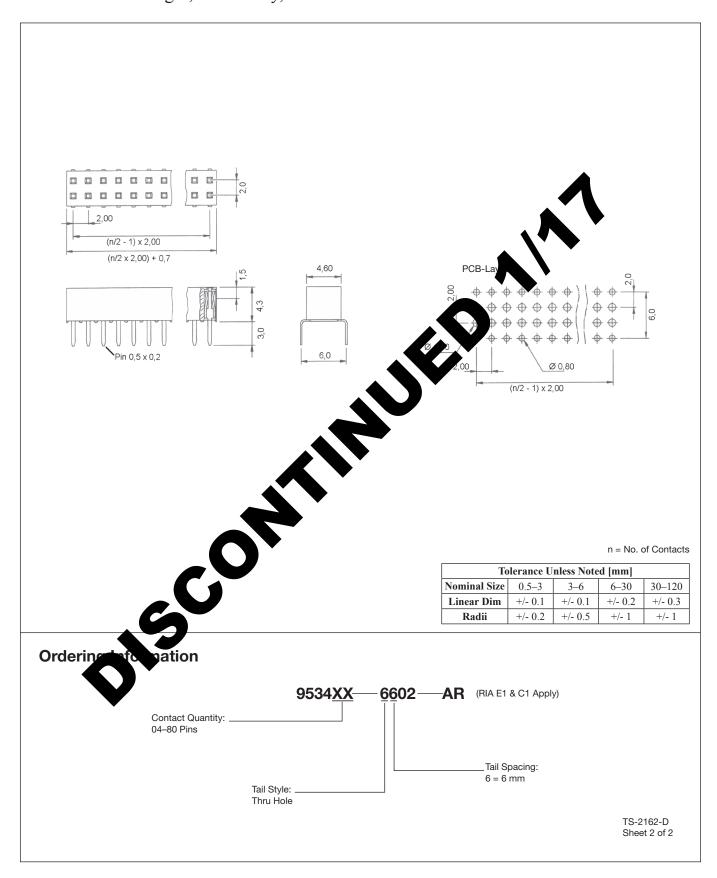

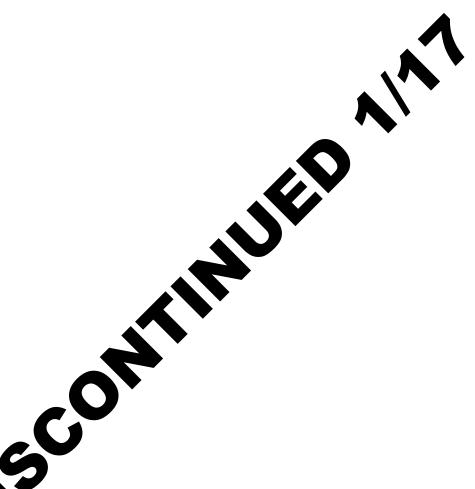

Important Notice

All statements, technical in the action of recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before asing this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements are ted to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effective as sexpressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of ninety (90) days from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.



3M Electronics Solutions Division

6801 River Place Blvd. Austin, TX 78726-9000 U.S.A. 1-800-225-5373 www.3Mconnectors.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings category:

Click to view products by 3M manufacturer:

Other Similar products are found below:

892-18-020-10-001101 58102-G61-06LF 582553-1 0009485154 009176003701906 0050291907 LY20-4P-DT1-P1E-BR 02.125.8002.8

609-3404 61062-3 622-0430 622-3653LF 63453-116 636-1030 636-1427 636-3427 636-4007 641938-9 641991-4 644827-2 65817-010LF

65817-015LF 65863-015LF 66207-023LF 67095-007LF 67601157 68648-049 70.362.1628.0 70-4210 70-4226B 70-4853B 707-5020 707
5028 71.350.2428.0 71918-208LF 71961-016LF 733-134 733-162 754199-000 760-3052 787-8014-00 79531-3000 FCN-360C032-B FCN
367T-T012/H FCN-723D010/2 80.063.4001.1 800-90-001-10-001000 800-90-010-10-002000 801-43-002-10-013000 801-43-006-10-002000