



### Electrical Commercial and Industrial

- Products
- Documentation & Literature
- News & Tradeshows
- Support

United States > Products & Services > Electronics, Electrical, and Communications > Electrical Commercial and Industrial > Products > Electrical Commercial & Industrial Products Catalog > Heat Shrink > Medium/Heavy Wall > 3M™ Heat Shrink HDT > 3M™ Heavy-Wall Flame-Retardant Cable Sleeve HDT-4500-48A, Black, cable range of 1000-2500 MCM, 4 ft. length, 5 per case

[Find An Account Rep](#)

[Where To Buy \(Find A Distributor\)](#)


[Contact Us](#)

## 3M™ Heavy-Wall Flame-Retardant Cable Sleeve HDT-4500-48A, Black, cable range of 1000-2500 MCM, 4 ft. length, 5 per case

UPC# 00054007406563 3M Product Number HDT-4500-48"-Black-5 Pcs 3M ID 80610294664

[Print](#)

[Share](#)

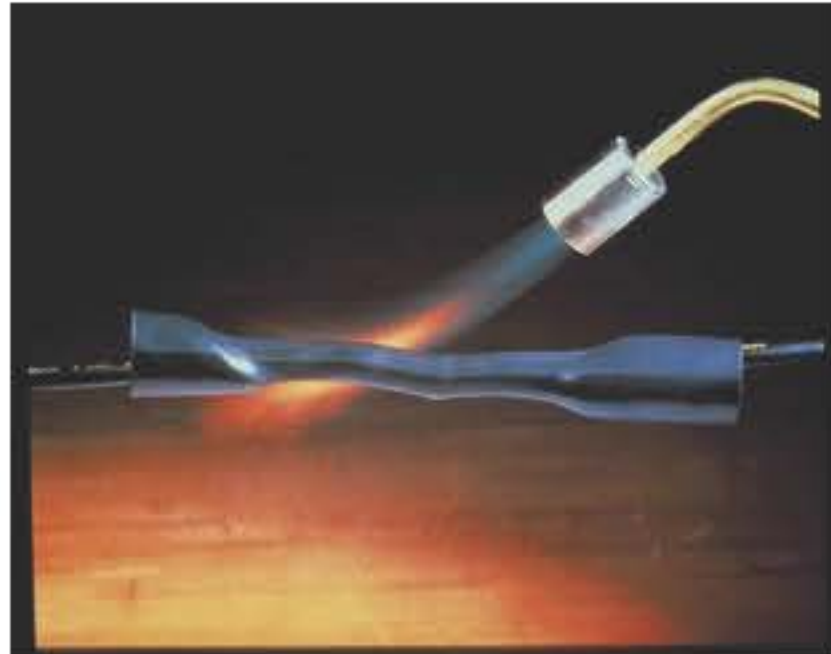

3M™ Heat Shrinkable Cable Sleeves HDT provide reliable performance for electrical splices, connections and terminations, as well as mechanical and environmental protection. This cable sleeve comes in a quantity of 5 four foot lengths per case.

#### Need Help?

Questions? We can help  
[Contact Us](#)

Network Access Message: The page

#### Overview

#### Support

3M™ Heat Shrinkable Heavy-wall Cable Sleeves HDT are cross-linked polyolefin. They are flame-retardant, highly split resistant and fast shrinking to provide rapid installation. The 48 in. (121,9 cm) sleeves come standard with a factory-applied adhesive/sealant. Order any of several packaging choices or look for the counter merchandiser assortment at a 3M authorized distributor and are not printed. MIL-DTL-23053/15, Class 1. Order in the size equivalent to expanded inside diameter required.

#### Specifications

China RoHS - Below MCV	Undetermined
Color	Black
EU RoHS Compliant	Undetermined
Expanded Inner Diameter	4.50 Inch
Expanded Inner Diameter (metric)	114.3 mm
Length	48 Inch
Length (metric)	1.22 Linear Metre
Material	Polyolefin
Operating Temperature Range (Celsius)	-55 Degrees C to -100 Degrees C
Operating Temperature Range (Fahrenheit)	-67 to 230 Degree Fahrenheit
Recovered Inner Diameter	1.50 Inch
Recovered Inner Diameter (metric)	38.1 mm
Shrink Ratio	3:1
Voltage Rating	1 kV

#### People who viewed this item also viewed



3M™ Heat Shrink Thin-Wall Tubing FP-301-1/4-Clear-100<sup>1</sup>: 100 ft spool length, 300 ft per case



3M™ Heat Shrink Very Flexible Polyolefin Tubing VFP-876-1/8-Black-500, 500 ft Length, 500 ft per spool, 3



3M™ Scotchlok™ IDC Butt Connector UY2 Cart



3M™ Novec™ Flux Remover, 12 oz can, 6 cans per case



3M™ Fastener SJ3527N Loop Black, 2 in x 50 yd 0.15 in (3.8 mm) Engaged Thickness, 2 per case Bulk



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular MIL Spec Connector](#) category:*

*Click to view products by [3M](#) manufacturer:*

Other Similar products are found below :

[89075GULPR](#) [0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-213-1208](#) [0134-213-2209](#) [0025-258-000](#) [60-042022-07P](#) [60-042022-19P](#)  
[60-042022-23P](#) [60-042217-10P](#) [0114-201-1278](#) [012-0467-000](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-213-1006](#) [6104-207-2302](#) [6104-](#)  
[208-1902](#) [61-168211-04P](#) [61-168617-10P](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-](#)  
[211-19149P](#) [6131-216-19149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3100A18-1P-472](#) [CS3100A-36-](#)  
[77P](#) [CS3101A-16-55P](#) [CS3102A-10SL-55P](#) [CS3102A-14S-58P](#) [CS3102A-32-17P](#) [CS3102A32-25S](#) [CS3102C18-4P-472](#)  
[CS3106A10SL3S004](#) [CS3106A-18-73S](#) [CS3108A-14S-52S](#) [CS3108A-28-51S](#) [6162-233-1277](#) [6162-324-1231](#) [M243082296Z](#)  
[M2884010AC1S1](#) [CT0-24-10SC](#) [CT0M20-7PCAU](#) [M28840/17AC1G3](#)