


Frame	PBT, UL94V-0	Notes
Impeller	PBT, UL94V-0	Date: 040912
Connection	Lead wires*	Available Options Tachometer- Thermal Control Alarm PWM Input
Motor	DC, impedance and polarity protected	
Bearing System	Dual ball bearing	* Connections UL type ~300mm Red (+) Black (-)
Insulation Resistance	10M ohm between lead wire and frame (500VDC)	
Dielectric Strength	60 second at 500VAC, max. leakage < 500 MicroAmp	
Temperature Range	-10C ~ +70C	Weight: 1150g
Life Expectancy	50000 hours (L10)	

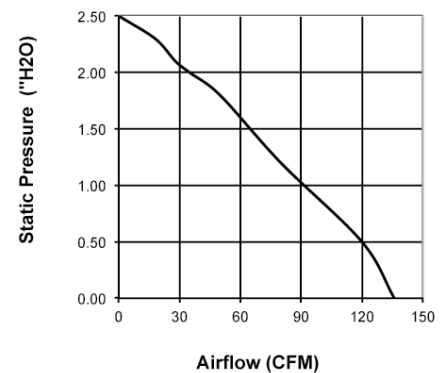

Model Number	ODB182-24HB	ODB182-48HB
Nominal Voltage	24 VDC	48 VDC
Voltage Range	12 ~ 27 VDC	24 ~ 55 VDC
Rated Current	2.2 A	1.1 A
Rated Speed (RPM)	2000	2000
Airflow (CFM)	136	136
Noise Level (dB)	63	63
Max. Static Pressure (" H ₂ O)	2.5	2.5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Blowers & Centrifugal Fans](#) category:

Click to view products by [Orion](#) manufacturer:

Other Similar products are found below :

[MKEL-DRB](#) [AIF60111](#) [AIF60112](#) [AIF62112](#) [AIF801724](#) [AIF82111](#) [AIF82112](#) [DOP-EXI014RAE](#) [BR300W100](#) [BR300W400](#)
[KFC1048DS-S45D](#) [AIF64111](#) [AIF641714](#) [AIF802714](#) [CME-COP01](#) [R2E180CH0312](#) [D2E160-AH02-15](#) [TP04G-AS2](#) [TP05G-BT2](#) [TP-PCC](#)
[BR200W250](#) [DFD0612H/SPECTRA](#) [DOP-EXI028RAE](#) [ENA01-MOD](#) [ENA01-EIP](#) [2234000A001-055](#) [2234000A00J000](#) [1396000K911-039](#)
[1319013K66E000](#) [1316037K66E000](#) [1301037K00E000](#) [1301037G00E002](#) [TP08G-BT2](#) [1232000A00E000](#) [1213000A07E000](#) [55442.40890](#)
[55462.19140](#) [G2E140-AG02-05](#) [55410.91750](#) [R2E190-RA18-96](#) [R2E225-RA02-47](#) [AB1212LB-Y01](#) [R4D450-AK03-05](#) [RLF100-11/14/19](#)
[BFB04512HD-R00](#) [G2D140-AC30-18](#) [R2E225-AB05-05](#) [M39012/24-0001](#) [K2E220-RA38-09](#) [55462.40760](#)