

TDE Instruments GmbH
 Gewerbestraße 8
 D-71144 Steinenbronn
 Germany

Tel.: +49(0)7157 20801
 Fax: +49(0)7157 20813
 Email: info@tde-instruments.de
 Web: www.digalox.com



Digalox DPM72-MPN

Graphical DIN-panelmeter for voltage, shunt and power with multiple display, RGB backlight and USB interface

Description


Graphical measuring instrument which unites the benefits of an analogue display with the accuracy of a digital instrument. The multi display with RGB backlight is able to display up to 4 parameters simultaneously. Thresholds can be associated with individual warning backlight colors. A variety of measure modes (volt AC/DC, ampere with shunt, frequency, power, cos phi) are supported. Scale endpoint of the indicator as well as scaling of the analogue signal and current transformer measurement can be adjusted freely via the DIP switch, alternatively there is an option for automatic adaption of the scale endpoint. The unit can be switched between measurement modes via an external switch. Minimum and maximum values for each parameter are recorded

and can be displayed optionally using an external switch. Measured values of one parameter are recorded over a timespan of 3 minutes up to 14 days. The timebase as well as the display of the measuring history can be activated by an external switch. The following parameters can be adjusted using the USB-Software: Scale endpoint, scale caption, display style (pointer, tachometer, bargraph, and more), splash display, backlight color, thresholds for alarm output, threshold warning color (light, blink), hysteresis, and more. Recorded measurement values can be read and a continuous transmission up to four measuring values can be enabled. Using the software, values can be viewed and exported as CSV.

Features

- Graphic display 16 grey levels with RGB backlight
- Pointer and digital display
- Multi display of up to 4 parameters
- USB interface, galvanically isolated
- Adjustable scale endpoint
- Recording of measurement over up to 14 days
- Alarm outputs with adjustable thresholds, galvanically isolated
- Individual alarm backlight color
- User splash display
- Different display styles, e.g. tachometer, bargraph, timebased view
- Transmission of measure value
- Integration of measure value
- Accuracy 1% true RMS
- Windows software for individual configuration and measure value recording

Samples adjustable display styles

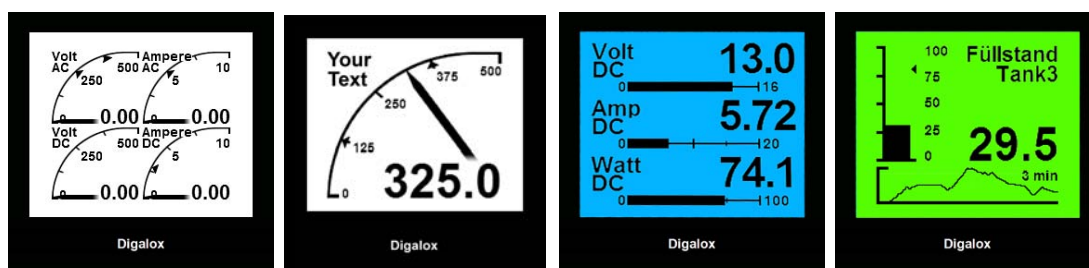




TDE Instruments GmbH
 Gewerbestraße 8
 D-71144 Steinenbronn
 Germany

Tel.: +49(0)7157 20801
 Fax: +49(0)7157 20813
 Email: info@tde-instruments.de
 Web: www.digalox.com

Software

The corresponding free software enables the individual configuration of the meter. Via software the measured values can be read from the memory, as well as continuous data transmission enabled.

Using the software, values can be viewed, recorded and be exported as CSV.

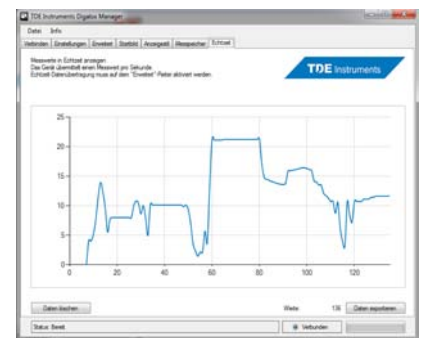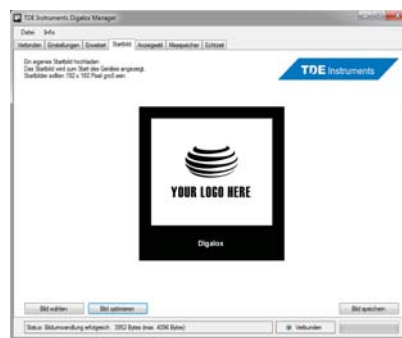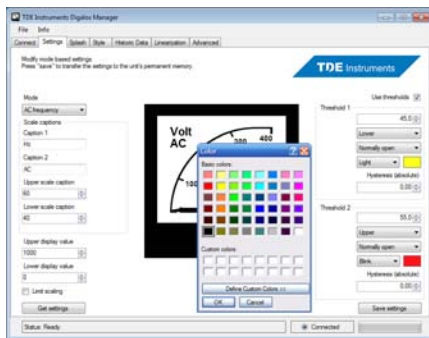

Spezifikation

Supply:
 10-30V AC/DC, galvanically isolated
 Display:
 LCD graphic display 192x160 pixels
 Measuring range voltage:
 AC 0-500V
 DC +/- 500V
 Accuracy voltage:
 1%
 Measuring range ampere:
 60mV DC shunt
 Accuracy ampere:
 1%
 Measuring range frequency:
 10-500Hz
 Accuracy frequency:
 0,1Hz

Recording of measurement:
 3 min to 14 days
 Alarm outputs:
 2 optocouple outputs max. 30V, 50mA
 Operating temperature:
 0°C to +50°C
 Storage temperature:
 -20°C bis +70°C
 Front panel:
 72 mm x 72 mm
 Panel cut out:
 68 mm x 68 mm
 Fixation:
 Bracket
 Protection front:
 IP65

Other Instruments of Digalox DPM72 series


Digalox DPM72-AV

Graphical DIN-panelmeter for Voltage and Ampere.



Digalox DPM72-AVP

Graphical DIN-panelmeter for Voltage and Ampere with USB interface.



Digalox DPM72-PP

Graphical DIN-panelmeter for DC shunt measurement and analog signal with USB interface.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Panel Meters](#) category:

Click to view products by [TDE](#) manufacturer:

Other Similar products are found below :

[M00558-00](#) [01.098.1658.1](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86427-26](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [25.350.0553.0](#) [20046-20](#) [20182-23](#) [AP1020](#) [AP1021](#) [25.320.5053.0](#) [25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#) [28000-03](#) [K3GN-NDT1-FLK 24VDC](#) [82322K-11](#) [86641-00](#) [87004-00](#) [MV15-DC-20V-110V-CU](#) [HB8260R4890](#) [20125-21](#) [86640-00](#) [2CMA100166R1000](#) [N27D 00M0](#) [DMG 100](#) [DMG 110](#) [DMG 800 L01](#) [DMK 01](#) [DMK 01 R1](#) [DMK 11](#)