



TDE Instruments GmbH
 Gewerbestraße 8
 D-71144 Steinenbronn
 Germany

Tel.: +49(0)7157 20801
 Fax: +49(0)7157 20813
 Email: info@tde-instruments.de
 Web: www.digalox.com

Digalox DPM72-PP

Graphical DIN-panelmeter for DC shunt measurement and analog signal with USB interface.



Description


Graphical measure instrument which unites the benefits of an analogue display with the accuracy of a digital instrument. The measure modes analog signal 0/4 to 20 mA and 60mV DC shunt are supported. Scale-endpoint of the indicator as well as scaling of the analog signal and current transformer measurement can be adjusted freely via the DIP-switch, alternatively there is an option for automatic adaption of the scale-endpoint. The unit can be switched between Volt and Ampere measurement via an external switch. Minimum and maximum values are recorded and can be displayed optionally using an external switch. Measure values are

recorded over a timespan of 3 minutes to 14 days. The timebase as well as the display of the measure history can be activated by an external switch. The following parameters can be adjusted using the USB-Software: Scale-endpoint, scale-caption, display-style (pointer, tachometer, bargraph and more), splash display, thresholds for alarm output, hysteresis and more. Recorded measurement values can be read as well as a continuous transmission of the actual measure value. Using the software, values can be viewed, recorded and be exported as CSV.

Features

- Graphic display 16 grey levels with white backlight
- Pointer and digital display
- USB interface
- Adjustable scale-endpoint
- Recording of measurement over up to 14 days
- Alarm outputs with adjustable thresholds, galvanically isolated
- User splash display
- Different display styles, e.g. tachometer, bargraph, timebased view
- Transmission of measure value
- Supply 10-30V AC/DC or USB, galvanically isolated
- Accuracy 1% (0,5%) true RMS
- Windows software for individual configuration and measure value recording

Adjustable display styles

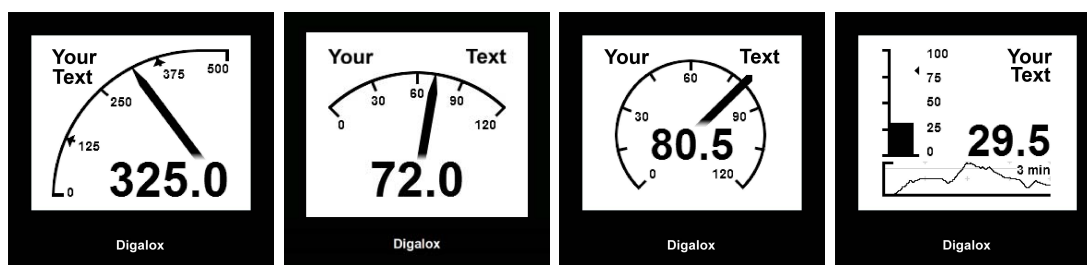




TDE Instruments GmbH
 Gewerbestraße 8
 D-71144 Steinenbronn
 Germany

Tel.: +49(0)7157 20801
 Fax: +49(0)7157 20813
 Email: info@tde-instruments.de
 Web: www.digalox.com

Software

The corresponding free software enables the individual configuration of the meter. Via software the measured values can be read from the memory, as well as continuous data transmission enabled.

Using the software, values can be viewed, recorded and be exported as CSV.

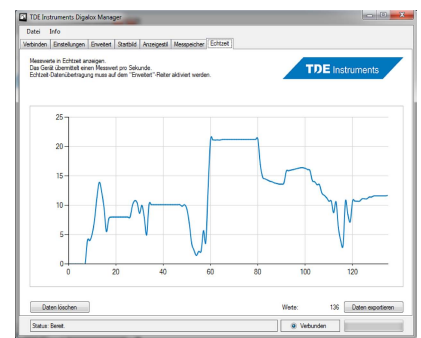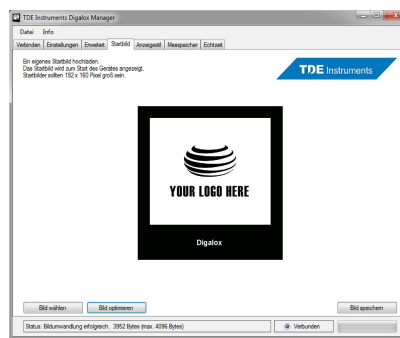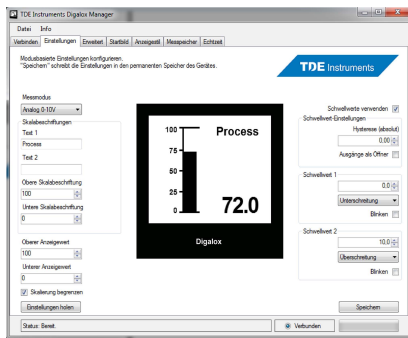

Specification

Supply:
 10-30V AC/DC
 Display:
 LCD graphic display 192x160 pixels
 Measure range voltage:
 60mV DC shunt
 Accuracy Voltage:
 1% (0,5%)
 Measure range Ampere:
 0/4 to 20mA DC analog signal
 Accuracy Ampere:
 1% (0,5%)
 Recording of measurement:
 3 Min. to 14 days
 Alarm outputs:
 2 optocouple outputs max. 30V, 50mA
 Operating temperature:
 0°C to +50°C

Storage temperature:
 -20°C bis +70°C
 Front panel:
 72 mm x 72 mm
 Panel cut out:
 68 mm x 68 mm
 Fixation:
 Bracket
 Protection front:
 IP65

Other Instruments of Digalox DPM72 series


Digalox DPM72-AV

Graphical DIN-panelmeter for Voltage and Ampere.



Digalox DPM72-AVP

Graphical DIN-panelmeter for Voltage and Ampere with USB interface.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Panel Meters](#) category:

Click to view products by [TDE](#) manufacturer:

Other Similar products are found below :

[M00558-00](#) [01.098.1658.1](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86427-26](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [25.350.0553.0](#) [20046-20](#) [20182-23](#) [AP1020](#) [AP1021](#) [25.320.5053.0](#) [25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#) [28000-03](#) [K3GN-NDT1-FLK 24VDC](#) [82322K-11](#) [86641-00](#) [87004-00](#) [MV15-DC-20V-110V-CU](#) [HB8260R4890](#) [20125-21](#) [86640-00](#) [2CMA100166R1000](#) [N27D 00M0](#) [DMG 100](#) [DMG 110](#) [DMG 800 L01](#) [DMK 01](#) [DMK 01 R1](#) [DMK 11](#)