

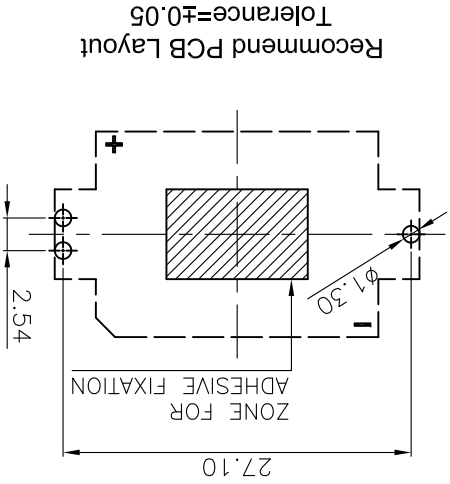
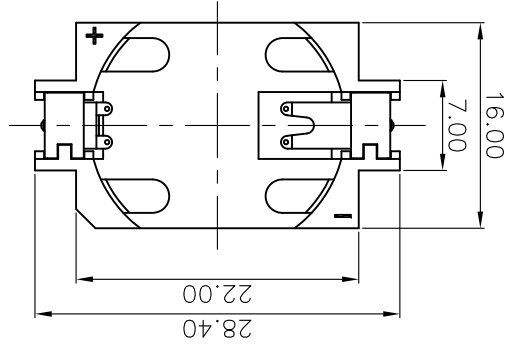


8 7 6 5 4 3 2 1

 晨翔电子有限公司 CONNLY ELECTRONIC CO., LTD		DRAWING NO. C-DS1092-07-XXX-A SCALE 1:1 SHEET 10F1	
SERIES DS1092-07 Series		DRAWING TYPE CUSTOMER	
SHEET SIZE A4		GENERAL TOLERANCE X. ±0.60 .X ±0.38 .XX ±0.25	
UNITS mm		ANGLE TOLERANCE X. ±5. .X ±3. .XX ±2.	
TITLE 2032 Lithium Coin Cell Battery Holders Horizontal Insert type		PROJECTION 	

GENERAL TOLERANCE	X. ±0.60	.X ±0.38	.XX ±0.25
ANGLE TOLERANCE	X. ±5.	.X ±3.	.XX ±2.

G F E D C B A

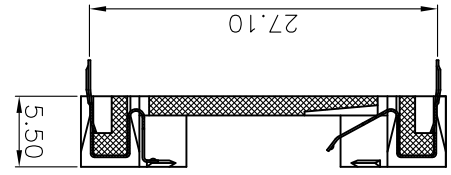

- NOTE:
- 1.1 Base: Thermoplastic, UL94 V-0, Color of black.
 - Temp. Range: -40°C to +105°C.
 - 1.2 Positive & Negative Contacts: Copper Alloy.
 2. Specification:
 - 2.1 Dielectric Withstanding Voltage: AC 500V AC.
 - 2.2 Insulation Resistance: 1000MΩ min.
 - 2.3 Contact Resistance: 100mΩ Max.
 3. Part Number Code: DS1092-07 - X X X X

- Housing material: L: LCP
- Contact plating: 6: Tin
- Housing color: W: White

REV.	A	NEW RELEASE	YCH 08/07/12'		
DESCRIPTION		DRAWN			
CHECKED					
APPROVED					

8 7 6 5 4 3 2 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coin Cell Battery Holders](#) category:

Click to view products by [Connfly](#) manufacturer:

Other Similar products are found below :

[3035](#) [1026](#) [1059](#) [1060](#) [1063](#) [1065](#) [1068](#) [1093](#) [D2](#) [D3](#) [46400000](#) [BC-0403](#) [BH-121-1B](#) [BH-1/2AA-2A](#) [BH-131A](#) [BH-3101A](#) [BH-3103B](#)
[BH-311-1A](#) [BH-311-1D](#) [BH-321-1B](#) [BH-321-1D](#) [BH-331-3D](#) [BH-331P](#) [BH-333A](#) [BH-341-1P](#) [BH-342-1A](#) [BH-351A](#) [BH-383A](#) [BH-421A](#)
[BH-422A](#) [BH-425A](#) [BH-431-1B](#) [BH-463A](#) [BH-511A](#) [BHC-18650-1P](#) [46300000](#) [46600000](#) [1058TR](#) [SBH-321-1AS](#) [SBH-331A](#) [SBH-341-](#)
[1A](#) [SBH-341-AS](#) [SBH-421-1A](#) [SBH-431-1AS](#) [SBH-441A](#) [SBH-9VA](#) [BH-121-1A](#) [BHC-18650-1A](#) [SBH-421-1AS](#) [SBH-441AS](#)