

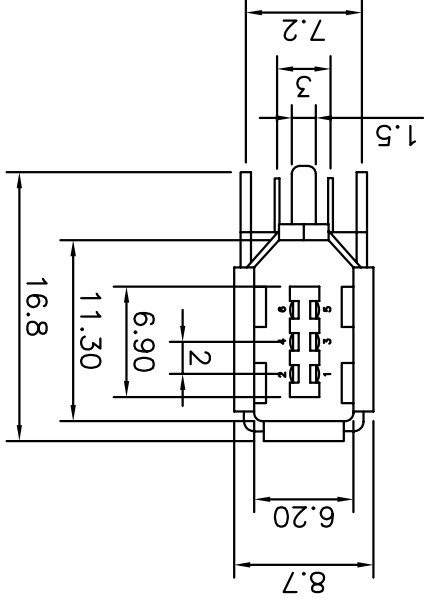


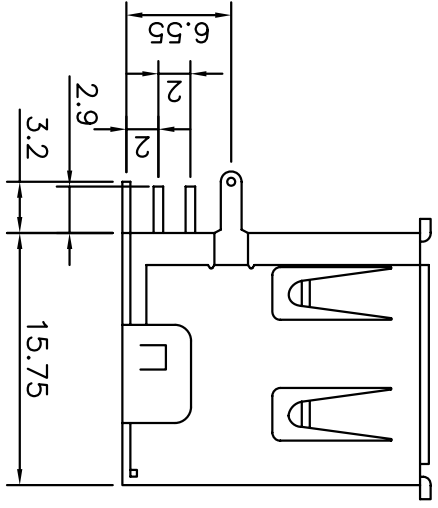

PROJECTION	UNIT	TITLE
IEEE 1394 Female 6 PIN R/A TYPE	mm	
SHEET SIZE	SERIES	DS1100
A4		

GENERAL TOLERANCE	X. ±0.60
	.X ±0.38
	.XX ±0.25
ANGLE TOLERANCE	X. ±5°
	.X ±3°
	.XX ±2°
DRAWING TYPE	CUSTOMER
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	C-DS1100-XXX

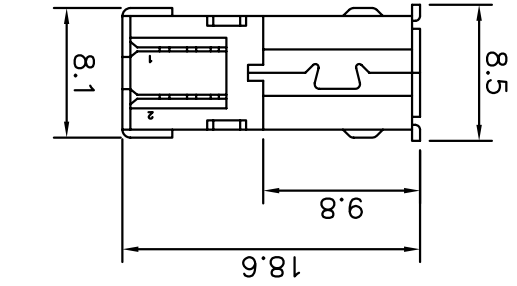

- C: Contact plating "3u" gold
- N: Nickel
- 6: Tin
- Color of housing
- B: Black

2. PRODUCT NUMBER CODE:  
DS1100 - X X X X

1. SPECIFICATIONS
- Contact Resistance: 50mΩ max
  - Insulator Resistance: 100MΩ min.
  - Current Rating: 1.5 A.
  - Rated Voltage: 30V DC
  - Dielectric withstanding voltage: AC 100V For 1 minute
  - Contact: Copper Alloy
  - Housing: Thermoplastic (UL 94V-0)

NOTES:

REV.	A	DESCRIPTION	NEW RELEASE	HP 21/06/05	DRAWN	CHECKED	APPROVED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Cables / IEEE 1394 Cables category](#):*

*Click to view products by [Connfly manufacturer](#):*

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [13805532](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [AC102012-2](#) [IP-USB1\(C10\)S-RW](#)  
[CABLE/RTP/USB/DT](#) [0847290003](#) [10115240-12200LF](#) [RS232-GTD](#) [USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [1689404-1](#) [FTP-](#)  
[629Y401](#) [FTP-628Y402](#) [943301-001](#) [FNY-W6022](#) [FNY-W6003-03](#) [1310-1015-05](#) [1310-1019-04](#) [0887283402](#) [UA-30AMFM-SL7B02](#) [UA-](#)  
[30AMFM-SL7B01](#) [UA-30AFM-LD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [UES-1001A160](#) [UES-1003A160](#)  
[USBFTVX7SA2N20A](#) [USBFTVX2SA2N20A](#) [USBFTV2PEMSA2N10A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F\\*2 to 2.54 2\\*5P-SH](#)  
[L=400mm](#) [EP-CBUSB10P2FLT](#) [1310-1033-01](#) [1310-1037-04](#) [ASR-USB](#) [68784-0075](#) [17-241361](#) [17-230471](#) [217B-BC02](#) [USB-29](#) [19800-](#)  
[010500-200-RS](#) [USB+MINI DIN 6P WITH BKT](#) [84729-0025](#)