**REVISION AG** 

DO NOT SCALE FROM THIS PRINT


REPRESENTS A CRITICAL DIMENSION. 2. MINIMUM PUSHOUT FORCE: 16 OZ FOR TERMINALS, 12 OZ FOR WELD TABS AND 8 OZ FOR LOCKING CLIPS.


3. MEASURED FROM BEND

NOTES:

4. MAXIMUM TERMINAL BURR: .003 [.08]

5. MAXIMUM HEIGHT VARIATION BETWEEN ANY TWO PINS: .005 [.13].
6. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT, SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION.

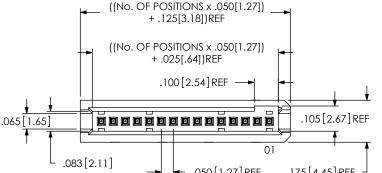

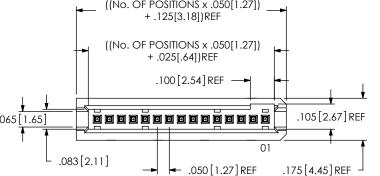

((No. OF POSITIONS x .050[1.27]) -.050[1.27]) 2° MAX SWAY (EITHER DIRECTION)  $\emptyset.018[0.46]$  REF "B" REF "A" ± .003 .014[0.36] REF 2° MAX SWAY (EITHER DIRECTION) ((No. OF POSITIONS x .050[1.27]) - .050[1.27])

TABLE 1				
POSITION	COPLANARITY			
-02 THRU -29	.004 [.10]			
-030 THRU -39	.006 [.15]			
-40 THRU -50	.008 [.20]			

FIG 1 (TFM-115-01-X-S-XX SHOWN)

TABLE 2						
LEAD STYLE	BODY	"A"	"B"	"C"	"E"	
-01	TFM-XX-S-01-XX	.078 [1.98]	.131 [3.33]	.428 [10.87]	.303 [7.70]	
-02	TFM-XX-S-01-XX	N/A	.131 [3.33]	.428 [10.87]	.231 [5.87]	
-03	TFM-XX-S-01-XX	.111 [3.33]	.139 [3.53]	.645 [16.38]	.356 [9.04]	

# TFM-1XX-XX-X-S-XX No OF POSITIONS-ALL POSITIONS AVAILABLE -02 THRU -50 LEAD STYLE

-01: T-1R16-01-X-2 THROUGH HOLE -02: T-1R16-01-X-2 SURFACE MOUNT -03: T-1R16-10-X THROUGH HOLE

#### PLATING SPECIFICATIONS

- -S: 30µ" SELECTIVE GOLD IN CONTACT AREA, MÂTTE TIN ON TAIL
- -F: 3µ" FLASH GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- -G: 30µ" GOLD IN CONTACT AREA, 3µ" GOLD ON TAIL
- -L: 15u" LIGHT GOLD IN CONTACT AREA. MATTE TIN ON TAIL
- -H: 50µ" HEAVY GOLD IN CONTACT AREA, 3u" GOLD ON TAIL
- -T: MATTE TIN CONTACT AND TAIL

**OPTION** 

- -A: ALIGNMENT PIN (USE TFM-XX-S-01-A) (NOT AVAILABLE` WITH -WT OPTION) SEE FIG 5, SHEET 2)
- -LC: LOCKING CLIP (USE LC-05-TM) (NOT AVAILABLE WITH -WT OPTION) SEE FIG 7, SHEET 3) (SEE NOTE 6)

-P: PICK AND PLACE PAD (USE PPP-15)

(SEE FIG 6, SHEET 2) (ONLY AVAILABLE ON -08 THRU -50 POSITIONS)

-K: POLYIMIDE FILM (SEE FIG 3, SHEET 2) (USE K-DOT-.217-.313-.005)

-WT: WELD TABS (USE WT-25-07-T)

(SEE FIG. 4, SHEET 2)
(AVAILABLE ON -02 THRU -30 POS ONLY) NOT AVAILABLE WITH -A OR -LC OPTIONS)


-TR: TAPE & REEL


(SEE SHEET 3, TAPE AND REEL VIEW) -SN: SOLDER NAIL (USE WT-27-03)


(NOT AVAILABLE WITH -A, -LC, -WT OPTIONS) (SEE FIG 8, SHEET 3)

> **BODY SPECIFICATION** -S: SINGLE ROW (USE TFM-XX-S-XX-XX)

\*\* NOT TOOLED







UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

DECIMALS **ANGLES** .XX: ±.01 [.3] .XXX: ±.005 [.13] .XXXX: ±.0020 [.051]

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN

SHEET SCALE: 1:0.4

DO NOT SCALE DRAWING INSULATOR: LCP, UL 94 V0, COLOR: BLACK TERMINAL: PHOSPHOR BRONZE


520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322


.050 C.L. SINGLE ROW SHROUDED TERMINAL STRIP


TFM-1XX-XX-X-S-XX

BY: D. SCHMELZ 8/21/2008 | SHEET 1 OF 3

E:\DWG\MISC\MKTG\TFM-1XX-XX-X-S-XX-MKT.SIDDRW

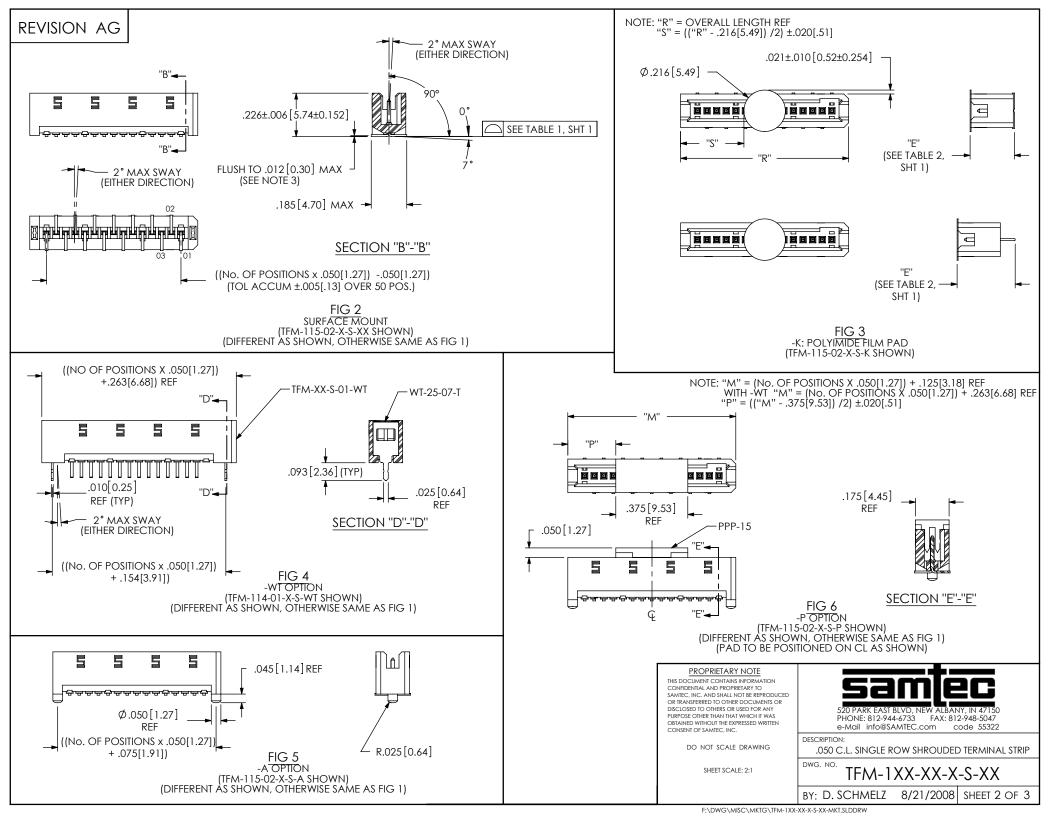


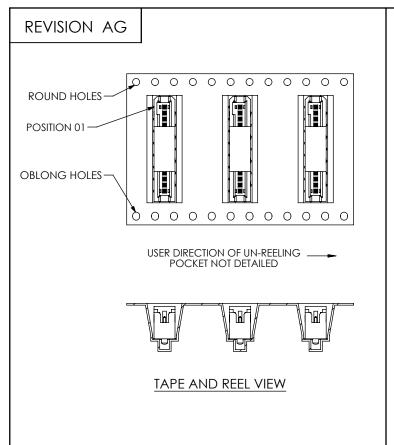


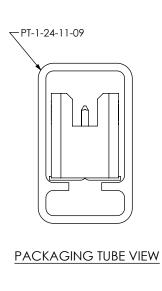

### NOTES:

- 1. USE PT-1-24-11-09 TUBE AND (2) TP-24 FOR -A, -LC, WT, AND -SN OPTIONS.
- 2. USE PT-1-24-03-09 TUBE AND (2) TP-09 FOR -P AND -K OPTIONS. 3. LOAD TUBE WITH 1ST POSITION IN SAME DIRECTION AS ARROW

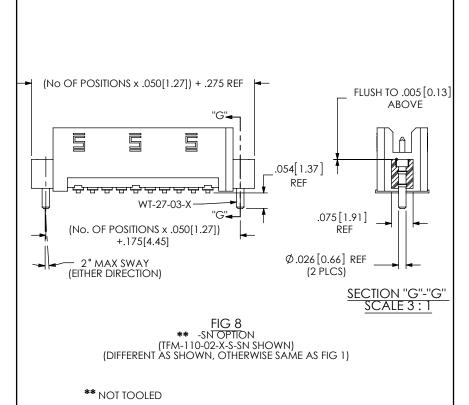

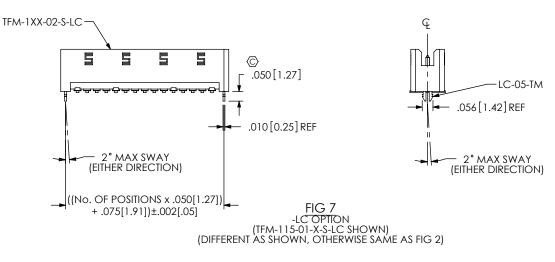

\* INSPECT ONLY WHEN APPLICABLE WITH RESPECT TO ASSEMBLY OPTION PROPRIETARY NOTE

#### THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC., AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PURPOSE OTHER THAN THAT WHICH IT WAS PHONE: 812-944-6733 FAX: 812-948-5047 OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC. e-Mail info@SAMTEC.com

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

.050 C.L. SINGLE ROW SHROUDED TERMINAL STRIP

code 55322

TFM-1XX-XX-X-S-XX

BY: D. SCHMELZ 8/21/2008 SHEET 3 OF 3

F:\DWG\MISC\MKTG\TFM-1XX-XX-X-S-XX-MKT.SLDDRW

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

95000-104TRLF 10135584-644402LF DF62W-EP2022PCA 95000-106TRLF DF62W-2022SCA DF62W-EP2022PC 2203348 DF62W-2022SC 1084018 1029039 1084017 802-10-012-10-002000 1112640 1112639 000-34000 0009482033 0009507031 57102-S06-03LF 57202-S52-04LF PCN6-15S-2.5E 0039019024 58102-G61-06LF 582553-1 0009485154 0009508121 0022285053 0050291907 018731A LY20-4P-DT1-P1E-BR 02.125.8002.8 60101931 60598-1 (Cut Strip) M1625-3R/100 61062-3 61082-181009 636-1427 638009-1 641938-9 641991-4 644168-1 647662-1 65039-019ELF 65781-047 65817-002LF 65817-015LF 65863-015LF 66207-023LF 67016-026LF 67046-001LF 67095-007LF