

(2,54mm) .100"

SS, SD, ESD, ESS, HSS SERIES

PRECISION MACHINED SOCKET STRIPS

Mates with:
TS, TD, HTS, BBS,
BBD, BBL, BDL, BHS,

SPECIFICATIONS

For complete specifications see www.samtec.com?SS, www.samtec.com?ESS, www.samtec.com?SD or www.samtec.com?ESD

SS, SD, ESS, ESD

Insulator Material:
Black G.F. Polyester
Contact:
BeCu
Shell:
Brass



except Style 5A
Phosphor Bronze
Current Rating:
1A

Plating:
Au over 50µ" (1,27µm) Ni or
Sn over 50µ" (1,27µm) Ni
Operating Temp Range:
-55°C to +125°C

Contact Resistance:
10 mΩ max
Lead Size Range:
(0,38mm to 0,56mm) .015" to
.022" DIA and most IC leads

Insertion Force:

(Single contact only)

Standard=
9oz (2,50N) avg.,
16oz (4,45N) max

Low Insertion Force=
2.5oz (0,70N) avg.,
5.5oz (1,53N) max

Withdrawal Force:

(Single contact only)

Standard=
2.5oz (0,70N) avg.,
1.5oz (0,42N) min

Low Insertion Force=
2.0oz (0,56N) avg.,
0.35oz (0,10N) min

Insertion Depth:

(-05, -1X & -21X, -5A)

(3,18mm) .125" to
(3,99mm) .157"

Insertion Depth: (-2, -22, -38)

(2,41mm) .095" to
(3,68mm) .145"

RoHS Compliant:

Yes

Lead-Free Solderable:

Yes

Wave only

SPECIFICATIONS

For complete specifications see www.samtec.com?HSS

HSS



Same as SS except:
Insulator Material:
Black Liquid Crystal Polymer
Lead-Free Solderable:
Wave, or reflow with all Au



TYPE STRIP	1	NO. PINS PER ROW	PLATING OPTION	LEAD STYLE	OPTION	OTHER OPTION
		01 thru 32 = SS, ESS Series	-S = 10µ" (0,25µm) Gold contact, Tin shell (Styles 2 & 22 only)		-L = Locking Socket Add -L suffix for locking lead socket in end positions. Requires Style -2 or -22 and .035" ± .003" DIA board hole.	-N = Non Flush
		01 thru 36 = HSS, SD & ESD Series	-T = 30µ" (0,76µm) Gold contact, Tin shell			
			-G = 30µ" (0,76µm) Gold contact, 10µ" (0,25µm) Gold shell			
	SS = Standard Single Row Socket	HSS = High Temp Single Row Socket				
	ESS = Elevated Single Row Socket					
	SD = Standard Double Row Socket					
	ESD = Elevated Double Row Socket					
	-TT = Tin contact and shell (Styles 1, 2, 4, 18 only) (and 05, except LIF N/A)					

ALSO AVAILABLE

Locking lead option on ESS and ESD series. Contact Samtec.

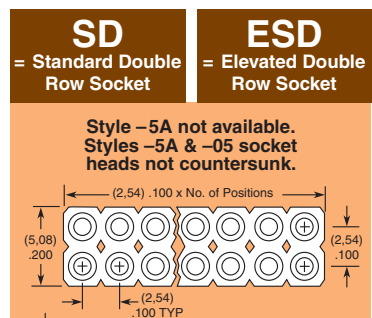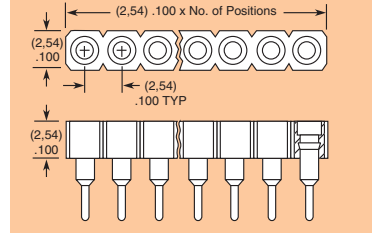

LIF= Low Insertion Force

Note:
Some lengths, styles and options are non-standard, non-returnable.

-1A, -1B or -1C

For LIF specify -21A, -21B or -21C (SS, HSS, SD)

LEAD STYLE	Y
-1A or -21A	(9,14) .360
-1B or -21B	(12,95) .510
-1C or -21C	(6,60) .260

-03, -04, -05

For LIF specify -23 (ESS, ESD)

-2, -22*, -5A, or -38*

*For LIF specify -22 or -38 (SS, HSS, SD)

LEAD STYLE	X DIA	Y	Z
-2 or -22	(0,51) .020	(3,18) .125	(7,62) .300
-38	(0,51) .020	(4,57) .180	(8,89) .350
-5A	(0,89) .035	(12,95) .510	(17,86) .703

Locking lead available. See OPTION.

LEAD STYLE	A	B	C
05	(17,86) .703	(13,46) .530	(4,39) .173
03 or 23	(11,51) .453	(7,62) .300	(3,89) .153
04	(14,05) .553	(10,16) .400	(3,89) .153

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IC & Component Sockets](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[714-43-102-31-012000](#) [0066-3-17-15-30-14-02-0](#) [0134-0-15-15-32-27-04-0](#) [614-DG5](#) [6527-0-00-15-00-00-03-0](#) [670](#) [672](#) [673](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-003101](#) [807-22-001-10-004101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [835-43-014-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-306-41-003000](#) [116-43-308-41-007000](#) [116-87-308-41-007101](#) [PX-68LCC](#) [PX-84LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [123-43-636-41-001000](#) [123-87-320-41-001101](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [123-43-322-41-801000](#) [123-43-428-41-001000](#) [123-43-624-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#)