

UNLESS OTHERWISE NOTED
 DIMENSIONS ARE IN INCHES TOLERANCES ARE:
 ONE PLACE DECIMALS ±.1[2.5] THREE PLACE DECIMALS ±.005[.13]
 TWO PLACE DECIMALS ±.01[.3] FOUR PLACE DECIMALS ±.0020[.051] ANGLES ± 2°

TITLE:
 2mm x 2mm
 TERMINAL STRIP ASSEMBLY
 DWG NO:
 TMMH-1XX-XX-XX-D-XXX-XXX
 SHEET 1 OF 3

TABLE 1				
LEAD STYLE	"A"	"B"	TERMINAL	"C"
-01	.126 [3.20]	.302 [7.67]	T-1S13-07-XX-2	.097 [2.46] REF
-04	.075 [1.91]	.255 [6.48]	T-1S13-04-XX-2	.101 [2.57] REF
* -05	.065 [1.65]	.234 [5.94] REF	T-1S13-07-XX-2	.090 [2.29]
-21	.126 [3.20]	.255 [6.48]	T-1S13-04-XX-2	.050 [1.27] REF
-22	.075 [1.91]	.204 [5.18]	T-1S13-25-XX-2	.050 [1.27] REF
-06	.126 [3.20]	.344 [8.74]	T-1S13-31-XX-2	.139 [3.53] REF

* SEE NOTE 5

TMMH-1XX-XX-XX-D-XXX-XXX

No. OF POSITIONS
 -02 THRU -50
 (PER ROW)


LEAD STYLE
 SEE TABLE 1

POLARIZATION
 SPECIFY POSITION -XXX TO BE OMITTED



OPTIONS (IF NO OPTIONS USE TMMC-50-D)
 -ES: END SHROUDS (SEE FIG. 2- SHT 2, 9 POS MIN)
 -EL: BOARD LOCK (SEE FIG. 3- SHT 2, 9 POS MIN)
 -EC: LOCKING CLIP (SEE FIG. 4- SHT. 2, 9 POS MIN) (SEE NOTE 10)
 -EP: GUIDE POST (SEE FIG. 5- SHT. 2, 9 POS MIN)
 -EA: ALIGNMENT PIN (SEE FIG. 6- SHT. 2, 9 POS MIN)
 -EBC: BOARD LOCK WITH LOCKING CLIP (SEE FIG. 7- SHT. 3, 9 POS MIN)
 (SEE NOTE 10)
 -EPC: GUIDE POST WITH LOCKING CLIP (SEE FIG. 8- SHT. 3, 9 POS MIN)
 (SEE NOTE 10)
 ** -MW: METAL WASHER (SEE FIG. 9- SHT. 3)
 (5 POS PER ROW MIN, 30 POS PER ROW MAX)
 -RC: RETAINING CLIP FOR IDC, USE LTC-09, DOUBLE ROW ONLY, REQUIRES
 4 POSITIONS MIN, NOT FOR USE WITH OTHER OPTIONS,
 SEE NOTES 8 & 9.

ROW OPTION
 -D: DOUBLE
 (USE TMMH-XX-D-X)
 (IF NO OPTIONS USE TMMC-50-D)

PLATING
 -L: LIGHT SELECTIVE GOLD (USE T-1S13-XX-L-2)
 -F: FLASH GOLD (USE T-1S13-XX-F-2)
 -S: SELECTIVE GOLD (USE T-1S13-XX-S-2)
 -G: GOLD (USE T-1S13-XX-G-2)
 -H: HEAVY GOLD (USE T-1S13-XX-H-2)
 -T: TIN (USE T-1S13-XX-T-2)
 -TM: MATTE TIN (USE T-1S13-XX-T-2)
 -LM: LIGHT SELECTIVE GOLD/MATTE TIN TAIL (USE T-1S13-XX-L-2)
 -FM: FLASH GOLD/MATTE TIN TAIL (USE T-1S13-XX-F-2)
 -SM: SELECTIVE GOLD/MATTE TIN (USE T-1S13-XX-S-2)

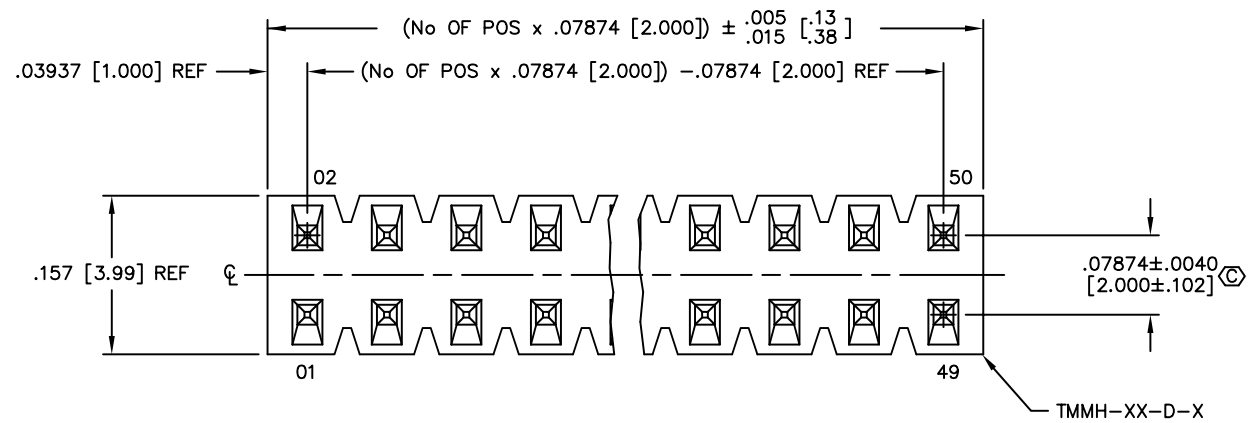

** -MW OPTION, DO NOT DESIGN IN. SAMTEC WILL ONLY SUPPORT EXISTING BUSINESS 2/05/02.

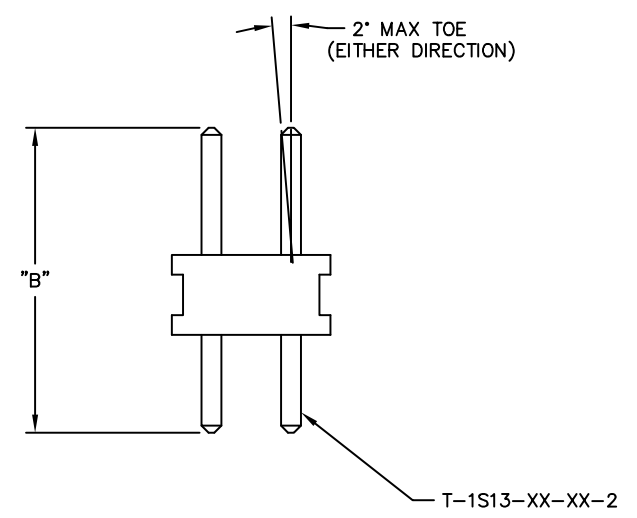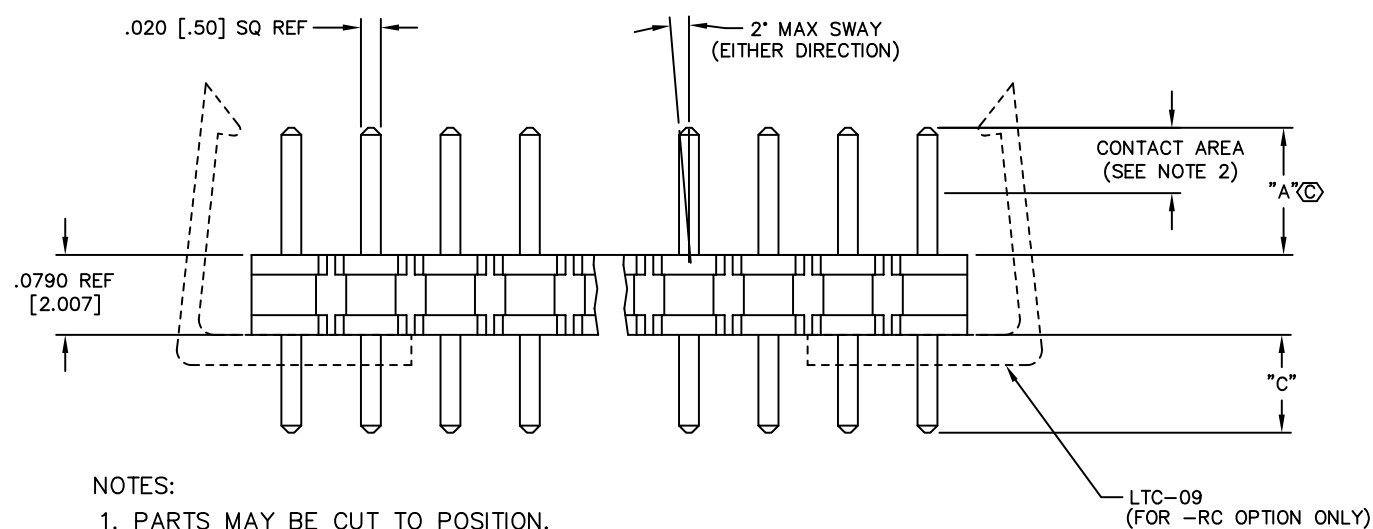

- NOTES:
- PARTS MAY BE CUT TO POSITION.
 - GOLD PLATING TO BE ON POST, TIN PLATING ON TAIL.
 - Ⓢ REPRESENTS A CRITICAL DIMENSION.
 - MINIMUM PUSHOUT FORCE: 1.0 LB.
 - MUST SHEAR TO DIMENSION SHOWN.
 - NOTE DELETED
 - MAX CUT FLASH: .020 [.51]
 - WAVE SOLDER APPLICATION ONLY.
 - RETAINING CLIP FOR -06 LEAD STYLE ONLY.
 - DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -EC, -EBC, AND -EPC OPTION.

FIG. 1

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

MATERIAL: BLACK, LCP	 520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150 PHONE (812) 944-6733 P.O. BOX 1147 CODE 55322	EXISPROD\ASSEMBLY\2MM TMMH-TH
TERMINAL: PHOSPHOR BRONZE		MADE BY: PURVIS 12-17-96

This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65781-047](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#)