



NPN Medium Power Silicon Transistor


2N3418, 2N3419, 2N3420 & 2N3421

2N3418S, 2N3419S, 2N3420S & 2N3421S



Features

- Available in commercial, JAN, JANTX, JANTXV, JANS and JANSR 100K rads (Si) per MIL-PRF-19500/393
- TO-5, TO-39 (TO-205AD) Package



Maximum Ratings

Ratings	Symbol	2N3418, S 2N3420, S	2N3419, S 2N3421, S	Units
Collector - Emitter Voltage	V_{CEO}	60	80	Vdc
Collector - Base Voltage	V_{CBO}	85	125	Vdc
Emitter - Base Voltage	V_{EBO}	8.0		Vdc
Collector Current $T_p \leq 1.0$ ms, duty cycle $\leq 50\%$	I_C	3.0 5.0		Adc
Total Power Dissipation @ $T_A = +25$ °C @ $T_C = +100$ °C	P_T	1.0 5.0		W W
Operating & Storage Temperature Range	T_{Op}, T_{Stg}	-65 to +200		°C

Electrical Characteristics


OFF Characteristics	Symbol	Mimimum	Maximum	Units
Collector - Emitter Breakdown Voltage $I_C = 50$ mAdc 2N3418, S, 2N3420, S 2N3419, S, 2N3421, S	$V_{(BR)CEO}$	60 80	---	Vdc
Collector - Emitter Cutoff Current $V_{CE} = 80$ Vdc, $V_{BE} = -0.5$ Vdc $V_{CE} = 120$ Vdc, $V_{BE} = -0.5$ Vdc 2N3418, S, 2N3420, S 2N3419, S, 2N3421, S	I_{CEX}	---	0.3 0.3	μ Adc
Collector - Emitter Cutoff Current $V_{CE} = 45$ Vdc $V_{CE} = 60$ Vdc 2N3418, S, 2N3420, S 2N3419, S, 2N3421, S	I_{CEO}	---	5.0 5.0	μ Adc
Emitter - Base Cutoff Current $V_{EB} = 6.0$ Vdc, $I_C = 0$ $V_{EB} = 8.0$ Vdc, $I_C = 0$	I_{EBO}	---	0.5 10.0	μ Adc



Electrical Characteristics -con't

ON Characteristics (1)		Symbol	Minimum	Maximum	Unit
Forward Current Transfer Ratio					
$I_C = 100 \text{ mAdc}, V_{CE} = 2.0 \text{ Vdc}$	2N3418, S, 2N3419, S	H_{FE}	20	60	
	2N3420, S, 2N3421, S		40		
$I_C = 1.0 \text{ Adc}, V_{CE} = 2.0 \text{ Vdc}$	2N3418, S, 2N3419, S		20	120	
	2N3420, S, 2N3421, S		40		
$I_C = 2.0 \text{ Adc}, V_{CE} = 2.0 \text{ Vdc}$	2N3418, S, 2N3419, S		15		
	2N3420, S, 2N3421, S		30		
$I_C = 5.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$	2N3418, S, 2N3419, S		10		
	2N3420, S, 2N3421, S		15		
Base - Emitter Voltage		$V_{BE(sat)}$			Vdc
$I_C = 1.0 \text{ Adc}, I_B = 0.1 \text{ Adc}$			0.6	1.2	
$I_C = 2.0 \text{ Adc}, I_B = 0.2 \text{ Adc}$			0.7	1.4	
Collector - Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
$I_C = 1.0 \text{ Adc}, I_B = 0.1 \text{ Adc}$			---	0.25	
$I_C = 2.0 \text{ Adc}, I_B = 0.2 \text{ Adc}$			---	0.5	
DYNAMIC Characteristics					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio					
$I_C = 0.1 \text{ Adc}, V_{CE} = 10.0 \text{ Vdc}, f = 20 \text{ MHz}$		$ h_{fe} $	1.3	8.0	
Output Capacitance					pF
$V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$		C_{obo}	---	150	
Switching Characteristics					
Delay Time	$V_{BE(off)} = -3.7 \text{ Vdc}$	t_d	---	0.08	μs
Rise Time	$I_C = 1.0 \text{ Adc}, I_{B2} = 100 \text{ mAdc}$	t_r	---	0.22	μs
Storage Time	$V_{BE(off)} = -3.7 \text{ Vdc}$	t_s	---	1.10	μs
Fall Time	$I_C = 1.0 \text{ Adc}, I_{B2} = -100 \text{ mAdc}$	t_f	---	0.20	μs
SAFE OPERATING AREA					
DC Tests:	$T_C = 100 \text{ }^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s s}$				
Test 1:	$V_{CE} = 5.0 \text{ Vdc}, I_C = 3.0 \text{ Adc}$				
Test 2:	$V_{CE} = 37 \text{ Vdc}, I_C = 0.4 \text{ Adc}$				
Test 3:	$V_{CE} = 60 \text{ Vdc}, I_C = 0.185 \text{ mAdc}$	2N3418, S;	2N3420, S		
	$V_{CE} = 80 \text{ Vdc}, I_C = 0.12 \text{ mAdc}$	2N3419, S;	2N3421, S		

Outline Drawing

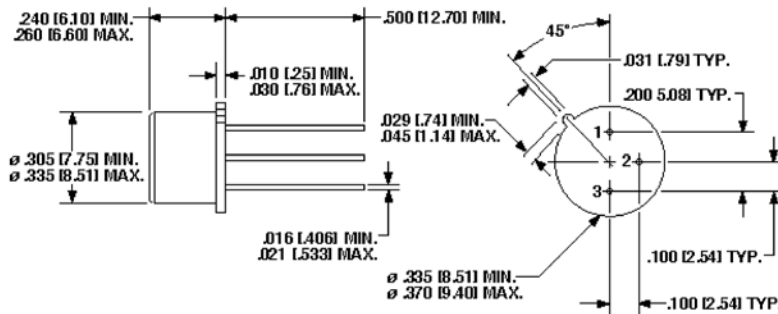

NOTE: Dimensions in Inches [mm]

Aeroflex / Metelics, Inc.

975 Stewart Drive,
Sunnyvale, CA 94085
Tel: (408) 737-8181
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

Hi-Rel Components

9 Hampshire Street,
Lawrence, MA 01840
Tel: (603) 641-3800
Fax: (978) 683-3264

www.aeroflex.com/metelicsHRC

54 Grenier Field Road,
Londonderry, NH 03053
Tel: (603) 641-3800
Fax: (603)-641-3500

ISO 9001: 2008 certified companies



www.aeroflex.com/metelics metelics-sales@aeroflex.com

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2013 Aeroflex / Metelics. All rights reserved.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [vpt components manufacturer](#):

Other Similar products are found below :

[JANTX2N3716](#) [2N3868JANTX](#) [2N2324AJANTX](#) [2N2328AJANTXV](#) [2N6341JANTX](#) [2N2328JANTX](#) [JANSR2N2907AUB](#)

[JANTX2N6052](#) [2N6059JANTX](#) [2N3771JANTX](#) [JANTX2N5672](#) [JANTX2N3441](#) [JANTX2N3055](#) [2N2323JAN](#) [2N6193JANTX](#)

[JANS2N2222A](#) [2N6301JANTX](#) [2N3421JANTX](#) [2N5153JANTX](#) [2N4150JANTX](#) [2N5154JANTX](#) [2N2222AJANTX](#)