

- ▶ Compact and low profile
- ▶ RoH Compliant (2011/65/EU)
- ▶ MSL 1
- ▶ Lead Finish: Au
- ▶ AEC-Q200 Qualified

ECX-53BQ

SMD QUARTZ CRYSTAL

The ECX-53BQ is a miniature SMD Crystal with a 5.0 x 3.2 mm footprint. AEC-Q200 Qualified.


OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECX-53BQ			UNITS
		MIN	TYP	MAX	
Frequency Range		10.000		40.000	MHz
Frequency Tolerance	at +25°C			± 30 *	ppm
Frequency Stability	-40 to +125°C (DS Option)			± 100 *	ppm
Shunt Capacitance				7	pF
Load Capacitance	Specify in P/N	10	20	Series	pF
Drive Level				100	µW
Operating Temperature	DS Option	-40		+125	°C
Storage Temperature		-55		+125	°C
Aging (Per Year)	@ +25°C ±3°C			±5	ppm

EQUIVALENT SERIES RESISTANCE/MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω	FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω
10.000 ~ 15.999	Fundamental	80	20.000 ~ 23.999	Fundamental	40
16.000 ~ 19.999	Fundamental	50	24.000 ~ 40.000	Fundamental	30

DIMENSIONS (mm)

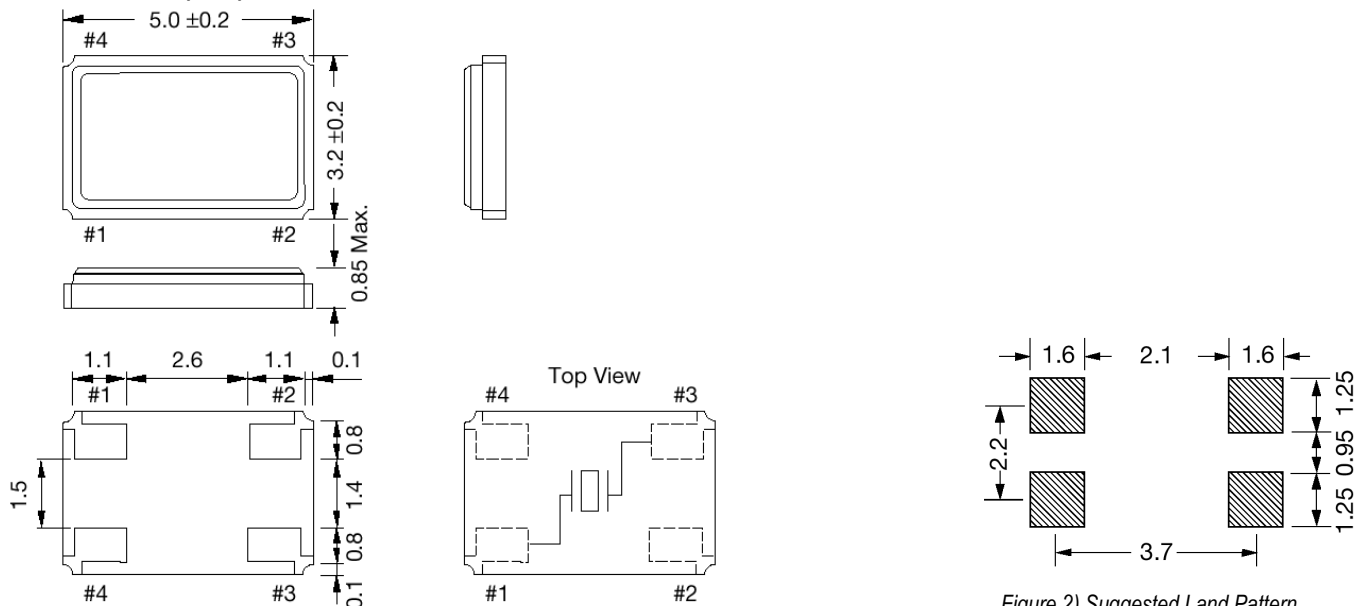

PART NUMBERING GUIDE: Example ECS-200-20-30BQ-DU-TR

ECS - Frequency Abbreviation - Load Capacitance - Package

200 = 20.000 MHz
See P/N Guide

20 = 20 pF
S=Series

30BQ =
ECX-53BQ

Custom Options

Tolerance

Blank = Std
A = ± 25 ppm
J = ± 20 ppm
R = ± 15 ppm
C = ± 10 ppm

* Stability

Blank = Std
D = ± 100 ppm
E = ± 50 ppm
G = ± 30 ppm
H = ± 25 ppm
T = ± 20 ppm
W = ± 15 ppm
K = ± 10 ppm

Temp Range

Blank = Std
M = -20 ~ +70°C
N = -40 ~ +85°C
P = -40 ~ +105°C
S = -40 ~ +125°C
U = -55 ~ +125°C

Packaging

TR= Tape
& Reel
1K/Reel

*Consult Factory for available stability options over extended temp range.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ecs inc manufacturer](#):

Other Similar products are found below :

[ECS-122.8-20-4 X](#) [ECS-3518-800-B-TR](#) [ECS-35-17-4XDN](#) [ECS-160-20-46X](#) [ECS-160-S-20A-TR](#) [ECS-P53-33.000MHZ-B](#) [ECS-80-8-30Q-VY-TR](#) [ECS-320-12-37-CKM-TR](#) [ECOC-2522-16.384-3GS](#) [ECXV-P37C2N-12.000](#) [ECXV-P37C2M-110.000](#) [ECS-P8F3-1.000-AN](#) [ECOC-2522-10.000-3FC](#) [ECS-36-18-4X](#) [ECOC-2522-38.880-3FC](#) [ECOC-2522-10.000-3GC](#) [ECS-P143-10-AN](#) [ECX-L37BN-1030.000](#) [ECS-.327-12.5-34R-TR](#) [ECS-80-20-1X](#) [ECS-P55-39.2832MHZ-BN](#) [ECOC-2522-20.000-3FC](#) [ECOC-2522-10.000-3HC](#) [ECS-SR1-8.00-B-TR](#) [ECXV-P37C2N-122.880](#) [ECS-TXO-3225MV-160-TR](#) [ECS-800-8-36CKM-TR](#) [ECS-80-16-28AX-TR](#) [ECOC-2522-100.000-5FC](#) [ECOC-2522-100.000-3FC](#) [ECXV-P37C2M-640.000](#) [ECX-L27CM-62.500](#) [ECS-2532VXO-270B-2.8](#) [ECS-36-S-1X](#) [ECXV-L37C2N-148.500](#) [ECX-L35BN-100.000](#) [ECS-200-8-37-CWN-TR](#) [ECS-080-18-1X](#) [ECS-120-32-5P-TR](#) [ECS-147.4-20-7S-TR](#) [ECS-327MV-CN-TR](#) [ECX-P35BN-125.000](#) [ECS-1612MV-120-CN-TR](#) [ECS-240-20-4X](#) [ECS-2520S33-250-FN-TR](#) [ECS-160-18-23A-EN-TR](#) [ECS-MPI2520R0-3R3-R](#) [ECXV-L37C2N-1152.000](#) [ECS-85-S-4X](#) [ECS-35-17-4X](#)