

INCH-POUND

MIL-PRF-83536/9D  
10 May 2011  
SUPERSEDING  
MIL-PRF-83536/9C  
10 December 2009

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT,  
LOW LEVEL TO 10 AMPERES, PERMANENT MAGNET DRIVE,  
HERMETICALLY SEALED, ALL WELDED, DC COILS

This specification is approved for use by all Departments  
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein  
shall consist of this specification sheet and [MIL-PRF-83536](#).

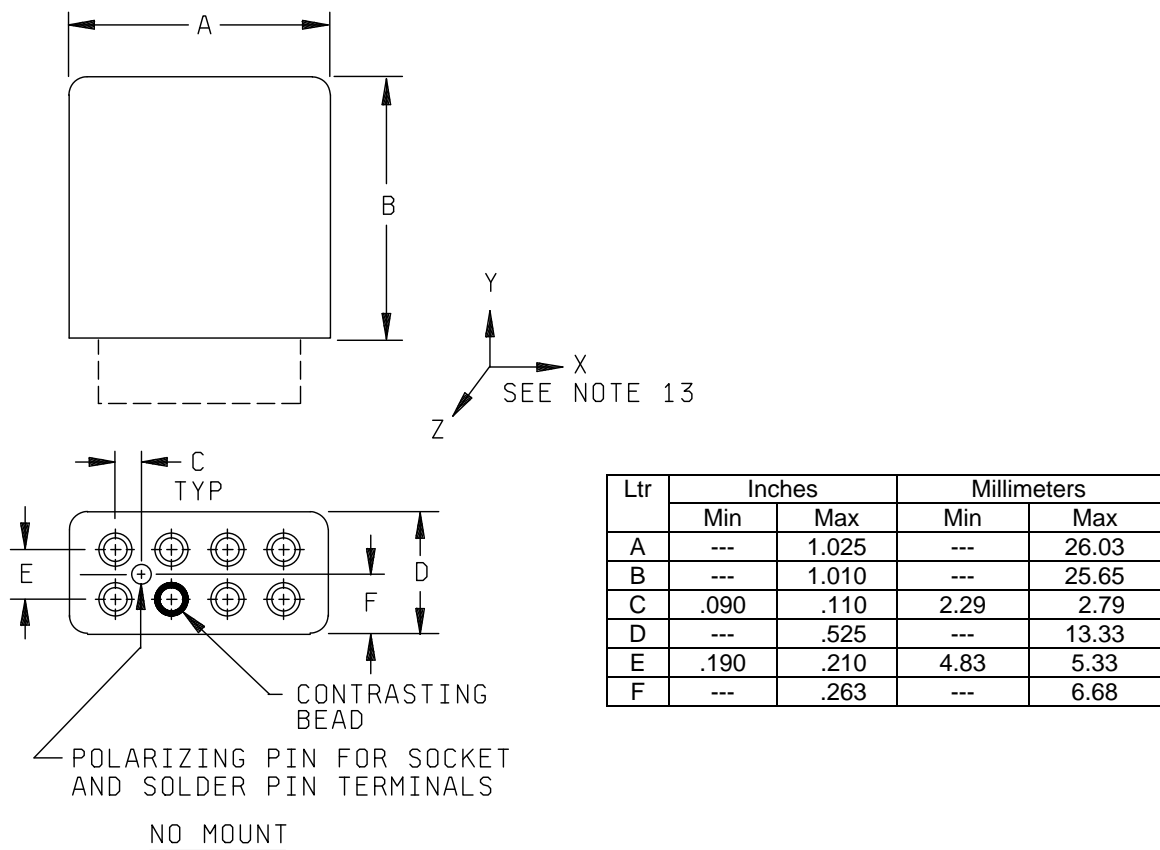


FIGURE 1. Dimensions and configurations.

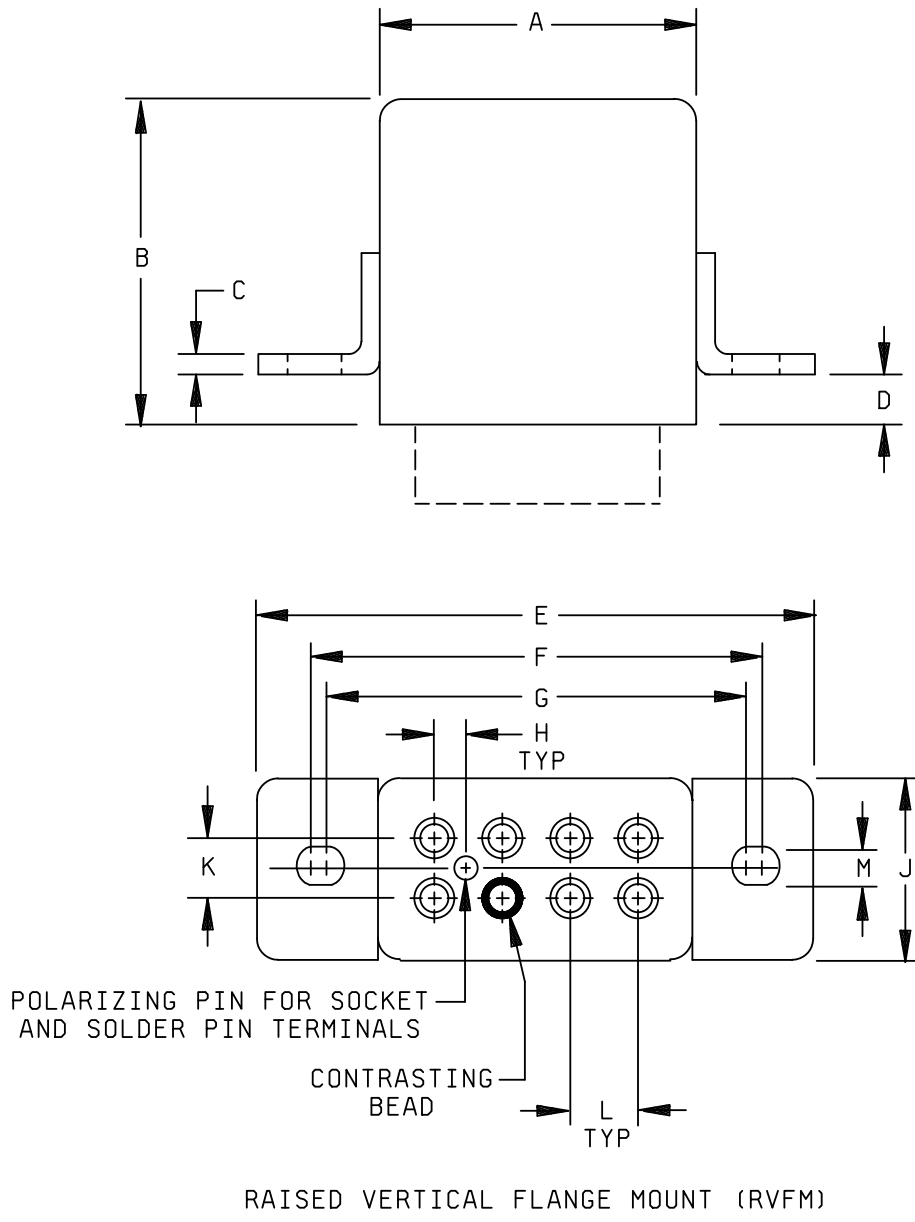


FIGURE 1. Dimensions and configurations - Continued.

Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	---	1.025	---	26.03
B	---	1.010	---	25.65
C	.030	.050	0.76	1.27
D	.146	.166	3.71	4.22
E	---	1.718	---	43.64
F	1.436	1.456	36.47	36.98
G	1.386	1.406	35.20	35.71
H	.090	.110	2.29	2.79
J	---	.525	---	13.34
K	.190	.210	4.93	5.33
L	.190 TYP	.210 TYP	4.93	5.33
M	.140--	.160	3.56	4.06

FIGURE 1. Dimensions and configurations - Continued.

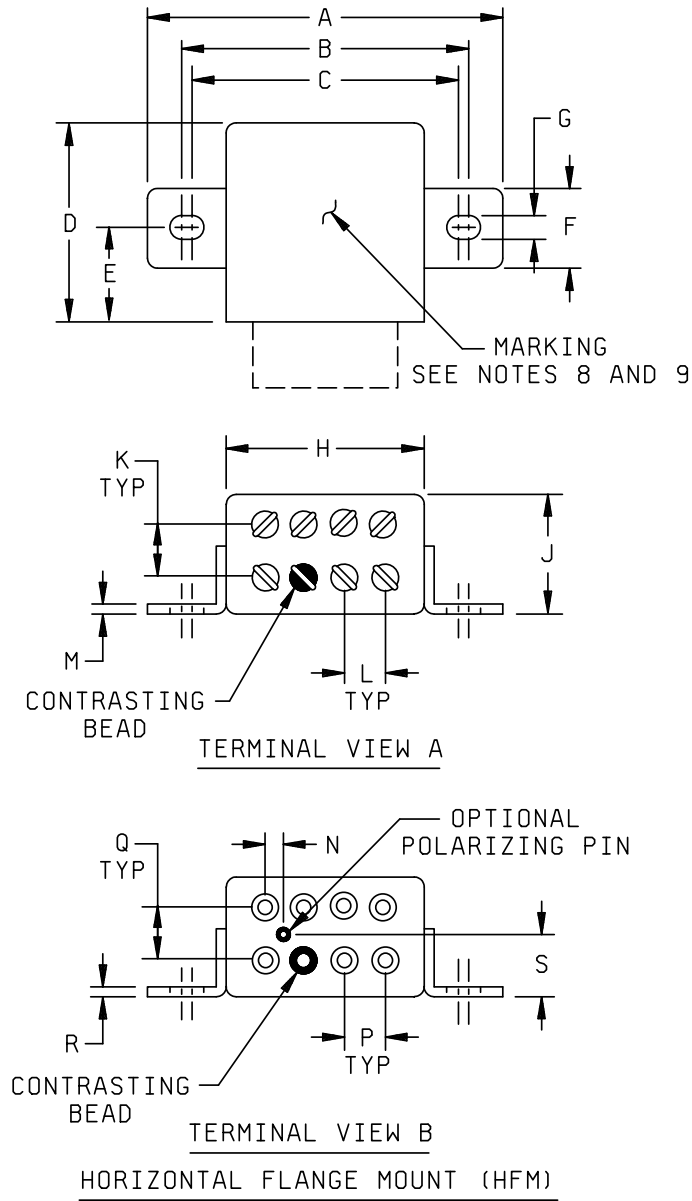


FIGURE 1. Dimensions and configurations - Continued.

Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	---	1.718	---	43.64
B	1.436	1.456	36.47	36.98
C	1.386	1.406	35.20	35.71
D	---	1.010	---	25.65
E	.490	.510	12.45	12.95
F	---	.485	---	12.32
G	.140	.160	3.56	4.06
H	---	1.025	---	26.03
J	---	.525	---	13.34
K	.190 TYP	.210 TYP	4.83 TYP	5.33 TYP
L	.190 TYP	.210 TYP	4.83 TYP	5.33 TYP
M	.030	.050	0.76	1.27
N	.090	.110	2.29	2.79
P	.190 TYP	.210 TYP	4.83 TYP	5.33 TYP
Q	.190 TYP	.210 TYP	4.83 TYP	5.33 TYP
R	.030	.050	0.76	1.27
S	---	.263	---	6.68

FIGURE 1. Dimensions and configurations - Continued.


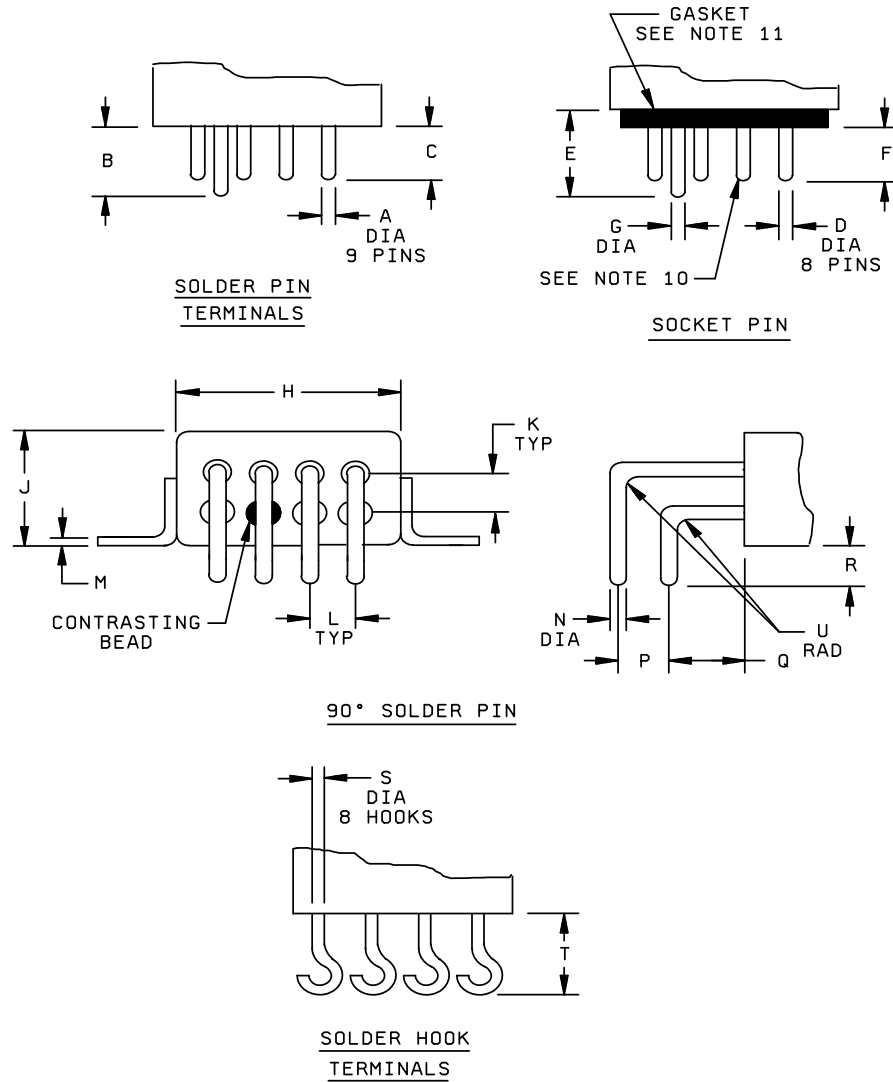


FIGURE 1. Dimensions and configurations - Continued.


## MIL-PRF-83536/9D

Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	.061	.064	1.55	1.62
B	.290	.310	7.37	7.87
C	.260	.280	6.60	7.11
D	.061	.063	1.55	1.60
E	.290	.310	7.37	7.87
F	.260	.280	6.60	7.11
G	.061	.064	1.55	1.62
H	---	1.025	---	26.03
J	---	.525	---	13.33
K	.190	.210	4.83	5.33
L	.190	.210	4.83	5.33
M	.030	.050	0.76	1.27
N	.061	.064	1.55	1.62
P	.190	.210	4.83	5.33
Q	.390	.410	9.91	10.41
R	.100	.200	2.54	5.08
S	.060	.064	1.52	1.62
T	---	.310	---	7.87
U	.090	.110	2.29	2.79


FIGURE 1. Dimensions and configurations - Continued.

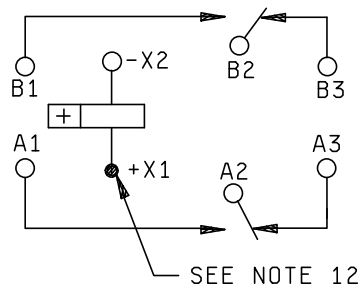

CIRCUIT DIAGRAM

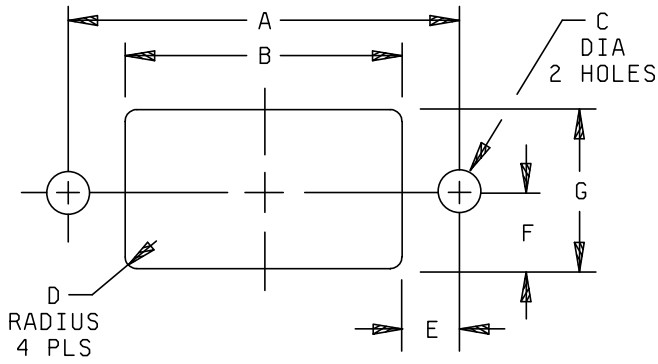

MOUNTING HOLE LAYOUT (RVFM)  
SOLDER HOOK TERMINALS

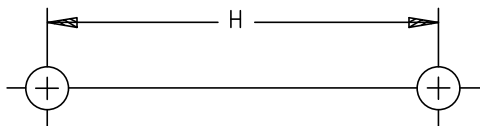

MOUNTING HOLE LAYOUT (HFM)

Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	1.396	1.416	35.46	35.97
B	1.052	1.072	26.72	27.23
C	.155	.161	3.94	4.09
D	.052	.072	1.32	1.83
E	.162	.181	4.11	4.60
F	.271	.294	6.88	7.47
G	.552	.572	14.02	14.53
H	1.396	1.416	35.46	35.96

FIGURE 1. Dimensions and configurations - Continued.



NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is  $\pm .010$  (0.25 mm).
4. There shall be affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified.
5. These relays are polarized monostable.
6. This relay shall not operate or be damaged by reverse polarity.
7. Permanent magnet drive consists of a permanent magnet with its flux path switched and combined with the electro-magnet flux.
8. Applicable to horizontal flange mount only. The circuit diagram, manufacturer's PIN, and the military PIN shall be marked on the near side. The remaining portion of the nameplate data shall be marked on the far side.
9. Applicable to horizontal flange mount only. Relays shall be marked with the manufacturer's name or CAGE code and date code. Marking shall be with the bottom of the print adjacent to the near side.
10. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Terminals and all track mount terminals shall be gold plated. One system for gold plating that may be used is [ASTM B488](#), type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity.
11. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 15 to 35, thickness  $.050 \pm .005$ . Gasket material according to [SAE-AMS3332](#) has been considered acceptable.
12. Indicated terminals shall be identified by a contrasting bead.
13. Plane of critical motion for vibration and shock is Y-axis.

FIGURE 1. Dimensions and configurations - Continued.

## REQUIREMENTS:

Contact data:

Load ratings: See [table I](#).

Low level: 10  $\mu$ A to 50  $\mu$ A at 10 mV dc to 50 mV dc or peak ac.

Intermediate current: Applicable.

Mixed loads: Applicable.

TABLE I. Rated contact load and cycles (amperes per pole).

Type of load (high level)	Cycles x 10 <sup>3</sup>	28 V dc	115 V ac 1 phase 400 Hz	115 V ac 1 phase 50/60 Hz <a href="#">1/</a>	115/200 V ac 3 phase 400 Hz	115/200 V ac 3 phase 50/60 Hz <a href="#">1/</a>
Resistive	100	10	10	2.5	10	2.5
Inductive	20	8	8	N/A	8	N/A
Inductive	10	N/A	N/A	2.5	N/A	2.5
Motor	100	4	4	2	4	2
Lamp	100	2	2	1	N/A	N/A

[1/](#) For 50/60 Hz rating, rupture and overload are not applicable and life for each load shall be 10,000 cycles.

Life: 100,000 cycles, unless otherwise specified (see [table I](#)).

Contact voltage drop or resistance:

Initial contact voltage drop: 0.100 volt maximum. Rated resistive current at 6 V dc or peak ac. Relays shall not make or break this load.

Initial contact resistance: 0.010 ohm maximum. 50 mA max at 6 V dc or peak ac.

High level life (contact voltage drop):

During life: 10 percent open circuit voltage maximum.

After life: 0.125 volt maximum.

Intermediate current (contact resistance):

During intermediate current: 3 ohms maximum.

After intermediate current: 0.150 ohm maximum.

Low level (contact resistance):

During low level: 100 ohms maximum.

After low level: 0.150 ohm maximum at 100 mA and 28 V dc.

Contact bounce: 1.0 millisecond maximum.

Contact stabilization time: 2.5 milliseconds maximum.

Overload current: 40 amperes dc, 60 amperes ac.

Rupture current: 50 amperes dc, 80 amperes ac.

Time current relay characteristics: See table II.

TABLE II. Time current relay characteristics. [1/](#)

Successive application	Amperes	Time
1	15	1 hour
2	50	5 seconds
3	100	1.2 seconds
4	250	0.2 second
5	350	0.1 second

[1/](#) All relays shall withstand overload and fault currents. Relays must be able to sustain five applications (make and carry only) of power concurrently on adjacent poles at each of five different current levels in the sequence listed in table II. Separate relays shall be tested at 28 V dc and 115/200 V ac, 400 Hz 3-phase. Cooling time between successive applications shall be 30 minutes. Tests shall be performed on both normally open and normally closed contacts. There shall be no failures or evidence of welding or sticking and relays shall pass contact voltage drop at the conclusion.

Coil data [1/](#): See [table III](#).

Operate time: 10 milliseconds maximum with rated coil voltage over the temperature range.

Release time: 10 milliseconds maximum from rated coil voltage over the temperature range.

Duty rating: Continuous.

Coil transient suppression: Not applicable.

Neutral screen: Not applicable.

Electrical data:

Insulation resistance:

Initial: 100 megohms at 500 V dc.

After life or environmental tests: 50 megohms at 500 V dc.

[1/](#) CAUTION: Due to possible interaction of relay magnetic fields, the following spacing requirements, as a minimum, shall be considered in dense packaging situations:

- a. Row to row assisting fields: .125 (3.18 mm).
- b. Row to row opposing fields: .1875 (4.763 mm).
- c. Side to side alternating fields: .0625 (1.588 mm).
- d. Side to side like fields: .125 (3.18 mm).

TABLE III. Dash numbers and characteristics. 1/

Dash number 2/				Mount	Coil data								
Solder pin	Solder Hook	Socket pin	90° solder pin		At 25°C						Over temperature range		
					Coil voltage (V dc) 3/		Coil resistance (ohms) (minimum)	Specified pickup voltage (V dc) 4/	Specified hold voltage (V dc) 4/	Specified dropout voltage (V dc) 4/	Specified pickup voltage (V dc) 4/	Specified hold voltage (V dc) 4/	Specified dropout voltage (V dc) 4/
Rated	Max												
001	002	003	---	No mount	6	7.3	18	3.2	1.6	0.4	4.5	2.3	0.25
004	005	006	---	RVFM	6	7.3	18	3.2	1.6	0.4	4.5	2.3	0.25
007	008	---	009	HFM	6	7.3	18	3.2	1.6	0.4	4.5	2.3	0.25
010	011	012	---	No mount	12	14.5	72	6.5	3.3	0.75	9.0	4.5	0.5
013	014	015	---	RVFM	12	14.5	72	6.5	3.3	0.75	9.0	4.5	0.5
016	017	---	018	HFM	12	14.5	72	6.5	3.3	0.75	9.0	4.5	0.5
019	020	021	---	No mount	28	29 <sup>5/</sup>	280	13.5	5.5	2.3	18.0	7.0	1.5
022	023	024	---	RVFM	28	29 <sup>5/</sup>	280	13.5	5.5	2.3	18.0	7.0	1.5
025	026	---	027	HFM	28	29 <sup>5/</sup>	280	13.5	5.5	2.3	18.0	7.0	1.5
---	028 <sup>6/</sup>	029 <sup>6/</sup>	---	RVFM	28	29 <sup>5/</sup>	280	13.5	5.5	2.3	18.0	7.0	1.5
030	031	032	---	No mount	48	50	850	24.0	12.0	3.0	36.0	14.0	2.0
033	034	035	---	RVFM	48	50	850	24.0	12.0	3.0	36.0	14.0	2.0
036	037	---	038	HFM	48	50	850	24.0	12.0	3.0	36.0	14.0	2.0

1/ Each relay possesses high level and low level capabilities. However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or p not recommended for subsequent use in low level applications.

2/ The suffix letter L, M, P, or R to designate the applicable failure rate level shall be added to the applicable listed dash number. Failure rate level (per L, 3.0; M, 1.0; P, 0.1; R, 0.01. Example: 001L, 002R.

3/ CAUTION: The use of any coil voltages less than the rated coil voltage will compromise the operation of the relay.

4/ Pickup, hold, and dropout voltages as shown are for test purposes only and are not to be used for design criteria.

5/ When maximum ambient temperature does not exceed +85°C, the maximum coil voltage shall be 32 V dc.

6/ Dash numbers -028 and -029 are rated for high shock and high vibration (see environmental characteristics for ratings).

Dielectric withstanding voltage 2:

	Coil to case	All other points
Sea level:		
Initial:	1,000	1,250
After life:	1,000	1,000
Altitude:		
At 80,000 feet:	350	350
At 300,000 feet:	500	500

Environmental characteristics:

Temperature range: -70°C to +125°C.

Maximum altitude rating: 300,000 feet.

Shock (specified pulse): Applicable, [MIL-STD-202](#), method 213, test condition C except peak value shall be 200 g's for  $6 \pm 1$  ms. (For dash numbers -028 and -029 peak value shall be 500 g's) Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts.

Vibration (sinusoidal): Applicable, [MIL-STD-202](#), method 204, 30 g's, except frequency range shall be 10 to 3,000 Hz. (For -028 and -029, 50g's.) Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts.

Vibration (random): Applicable to qualification and group C inspection. Test in accordance with [MIL-STD-202](#), method 214, test condition IG ( $0.4 \text{ g}^2/\text{Hz}$ , 50 to 2,000 Hz), 15 minutes each plane. Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts. For -028 and -029, use test condition IH, except that power spectral density shall be  $0.65 \text{ g}^2/\text{Hz}$ .

Acceleration: Applicable, except 15 g's.

Physical data:

Dimensions and configurations: See [figure 1](#).

Weight: 0.10 pound (46 grams).

Terminal strength:

Solder hook terminals:

Pull force: 10 pounds  $\pm 1.0$  pound.

Bend: Not applicable to leads .047 (1.19 mm) and larger.

Twist: Not applicable.

Solder pin terminals:

Pull force:

For .062 diameter terminals: 10 pounds  $\pm 1.0$  pound.

2 Dielectric may be improved by suitable insulation of terminals and wiring after installation.  
Bend: Not applicable to leads .047 (1.19 mm) and larger.

MIL-PRF-83536/9D

Twist: Not applicable.

Socket pin terminals:

Pull force:

For .062 diameter terminals: 5 pounds ±0.5 pound.

Bend: Not applicable to leads .047 (1.19 mm) and larger.

Twist: Not applicable.

Terminal solderability: Applicable to solder pin and solder hook terminals only.

Seal: Hermetic.

Marking: Applicable.

Part or Identifying Number (PIN): M83536/9 (dash number from table III and suffix letter designating failure rate level).

Qualification inspection:

Qualification inspection and sample size: See [table IV](#).

TABLE IV. [Qualification inspection and sample size.](#) [1/](#)

Single submission	Group submission	
18 units plus 1 open unit for level L at C = 0 <a href="#">2/</a>	M83536/9-024	18 units plus 1 open unit for level L at C = 0 <a href="#">2/</a>
33 units plus 1 open unit for level M at C = 0 <a href="#">2/</a>	M83536/9-024	33 units plus 1 open unit for level M at C = 0 <a href="#">2/</a>
Qualification inspection as applicable	M83536/9-024	Qualification inspection as applicable
	M83536/9-020	2 units, qualification inspection table, group II, shock, vibration, acceleration, terminal strength, and seal
	M83536/9-025	
	M38536/9-027	
	M83536/9-002	2 units, qualification inspection table, group II
	M83536/9-015	
	M83536/9-038	

[1/](#) For retention of qualification or extension of qualification to lower failure rate levels, all life test data accumulated on [MIL-PRF-83536/10](#) may be used in addition to MIL-PRF-83536/9 data. Prior to performance of retention of qualification testing, the relay manufacturer shall preselect the sampling plan.

[2/](#) The number of units required for qualification testing shall be increased as required in Q5, table II of [MIL-PRF-83536](#), if the contractor elects to test the number of units permitting one or more failures. Prior to performance of qualification testing, the relay manufacturer shall preselect the sampling plan.

MIL-PRF-83536/9D

Qualification inspection (reduced testing) (sample size - 2 units each coil voltage and 1 unsealed unit).  
See [table V](#).

If the relays produced for MIL-PRF-83536/9 are similar in construction and design except for the suppression network to the relays produced for [MIL-PRF-83536/10](#), then reduced testing for qualification of MIL-PRF-83536/9 relays may be performed concurrent with or subsequent to successful qualification of [MIL-PRF-83536/10](#) relays. For reduced testing, see table V.

TABLE V. Qualification inspection (reduced testing).

Inspection
2 units each coil voltage Group II of qualification inspection table 1 unsealed sample unit for internal inspection

Supersession data: See [table VI](#).

TABLE VI. Supersession data.

Superseded PIN MS27401-	Replacement PIN M83536/9-
5	023
6	024
9	028
10	029
13	023
14	024
21	026
23	026
37	025
38	025
41	022
42	022
46	020
47	019
50	020
51	019
58	027

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to [MIL-PRF-83536](#), this document references the following:

[MIL-PRF-83536/10](#)  
[ASTM B488](#)

[MIL-STD-202](#)  
[SAE-AMS-3332](#)

Custodian:  
Navy – EC  
Air Force - 85  
DLA - CC

Preparing activity:  
DLA – CC  
  
(Project 5945-2011-012)

Review activities:  
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil/>.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)  
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)  
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)  
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)