




# LM4001 THRU LM4007

**SURFACE MOUNT RECTIFIERS**

**REVERSE VOLTAGE: 50 - 1000 V CURRENT: 1.0 A**

MiniMELF (DO-213AA)

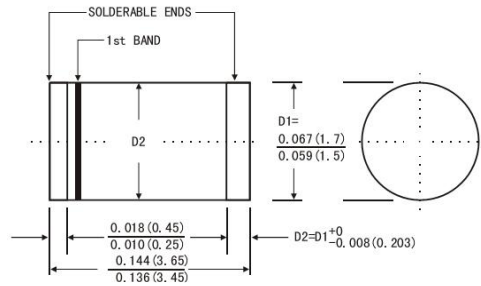

Dimensions in millimeters

## FEATURES

The plastic package carries Underwrites Laboratory Flammability classification 94V-0  
For surface mounted application

## MECHANICAL DATA

Case: MiniMELF(DO-213AA), molded plastic body  
Terminals: Lead solderable per MIL-STD-750, method 2026  
Polarity: Color band denotes cathode end  
Mounting Position: Any

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

MDD Catalog Number		LM 4001	LM 4002	LM 4003	LM 4004	LM 4005	LM 4006	LM 4007	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current $T_A=75$	$I_{(AV)}$	1.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	25							A
Maximum forward voltage at 1.0A	$V_F$	1.1							V
Maximum DC reverse current @ $T_A=25$ at rated DC blocking voltage @ $T_A=125$	$I_R$	5.0 50							$\mu A$
Typical junction capacitance (NOTE 1)	$C_j$	15							pF
Typical thermal resistance (NOTE 2)	$R_{j\theta L}$	75							/W
Typical thermal resistance (NOTE 3)	$R_{j\theta A}$	30							/W
Operating temperature range	$T_j$	- 65 --- + 175							
Storage temperature range	$T_{STG}$	- 65 --- + 175							

NOTES:1. Measured at 1.0MHz and applied average voltage of 4.0V DC.

2. Thermal resistance junction to lead, 6.0 mm<sup>2</sup> copper pads to each terminal.

3. Thermal resistance junction to ambient, 6.0 mm<sup>2</sup> copper pads to each terminal.



www.microdiode.com

# RATINGS AND CHARACTERISTIC CURVES LM4001 THRU LM4007

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

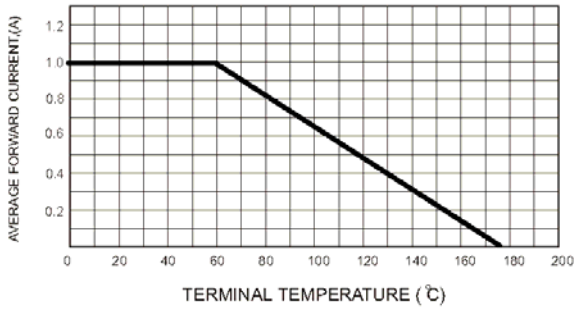


FIG.2-TYPICAL FORWARD CHARACTERISTICS

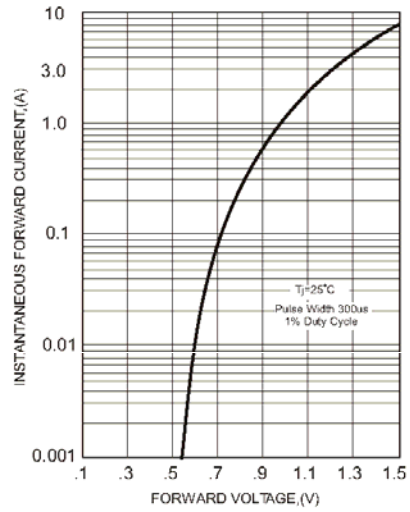


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

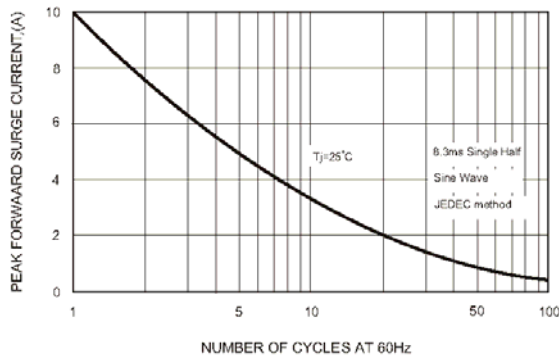


FIG.5 - TYPICAL REVERSE CHARACTERISTICS


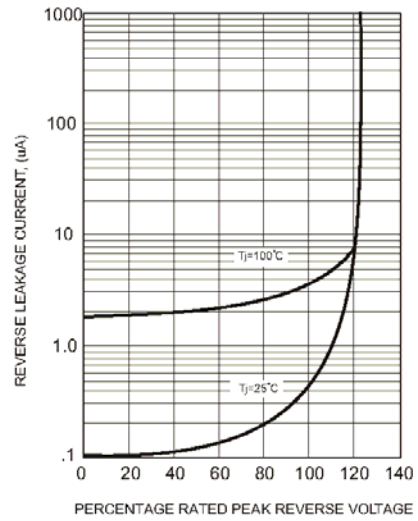


FIG.4-TYPICAL JUNCTION CAPACITANCE



The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

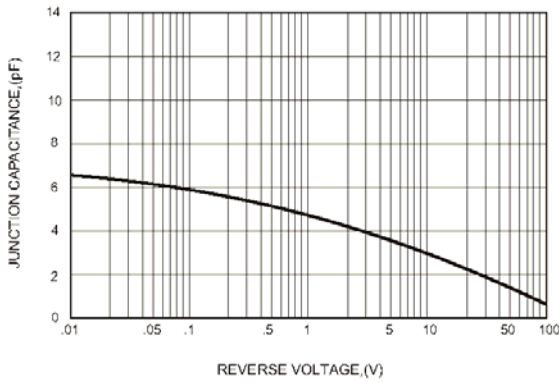

www.microdiode.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [Microdiode Electronics manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)