

# SKBPC3504 THRU SKBPC3516


THREE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

REVERSE VOLTAGE 400 to 1600 Volts FORWARD CURRENT 35 Ampere

## FEATURES

- ◆ I<sub>o</sub> 35A
- ◆ V<sub>RRM</sub> 400V~1600V
- ◆ Glass passivated chip
- ◆ High surge forward current capability

## SKBPC

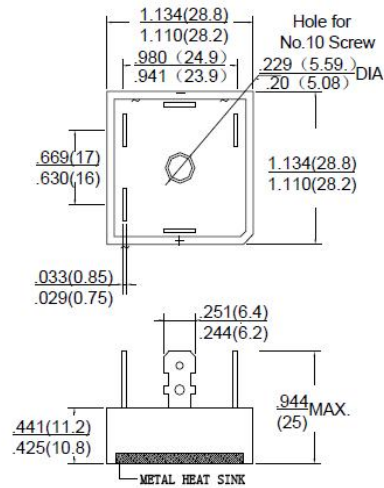

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	Conditions	SKBC 3504	SKBPC 3506	SKBPC 3508	SKBPC 3510	SKBPC 3512	SKBPC 3514	SKBPC 3516	UNIT
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>		400	600	800	1000	1200	1400	1600	V
Average Rectified Output Current	I <sub>O</sub>	60Hz sine wave, R-load With heatsink T <sub>c</sub> =55°C	35							A
Surge(Nonrepetitive) Forward Current	I <sub>FSM</sub>	60Hz sine wave, 1 cycle, T <sub>a</sub> =25°C	425							A
Current Squared Time	I <sup>2</sup> t	1ms ≤ t < 8.3ms T <sub>j</sub> =25°C Rating of per diode	750							A <sup>2</sup> S
Storage Temperature	T <sub>STG</sub>		-40~+150							°C
Junction Temperature	T <sub>J</sub>		-55~+150							°C
Dielectric Strength	V <sub>dis</sub>	Terminals to case, AC 1 minute	2.5							KV
<b>Item</b>	<b>SYMBOL</b>	<b>UNIT</b>	<b>Test Condition</b>							<b>Max</b>
Peak Forward Voltage	V <sub>FM</sub>	V	I <sub>FM</sub> =12A, Pulse measurement, Rating of per							1.2
Peak Reverse Current	I <sub>RRM</sub>	μA	V <sub>RM</sub> =V <sub>RRM</sub> , Pulse measurement, Rating of per diode							10
Thermal Resistance	R <sub>θJ-C</sub>	°C/W	Between junction and case, With heatsink							1.35

# SKBPC3504 THRU SKBPC3516

General purpose 3 phase Bridge Rectifier

REVERSE VOLTAGE 400 to 1600 Volts FORWARD CURRENT 15 Ampere

## RATING AND CHARACTERISTIC CURVES SKBPC3504 THRU SKBPC3516

图1:  $I_o$ - $T_c$ 曲线  
FIG1:  $I_o$ - $T_c$  Curve

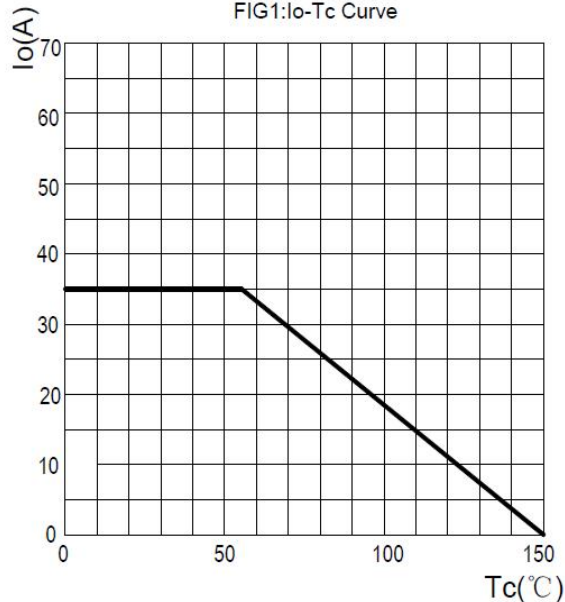


图2: 耐正向浪涌电流曲线  
FIG2: Surge Forward Current Capacity

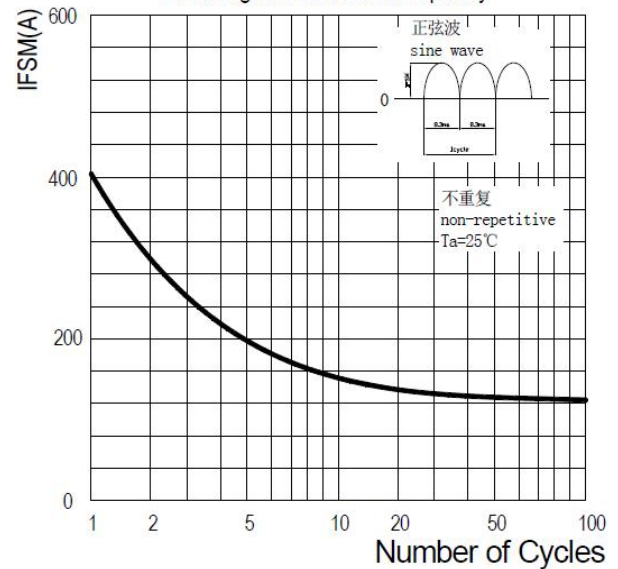


图3: 正向电压曲线  
FIG3: Instantaneous Forward Voltage


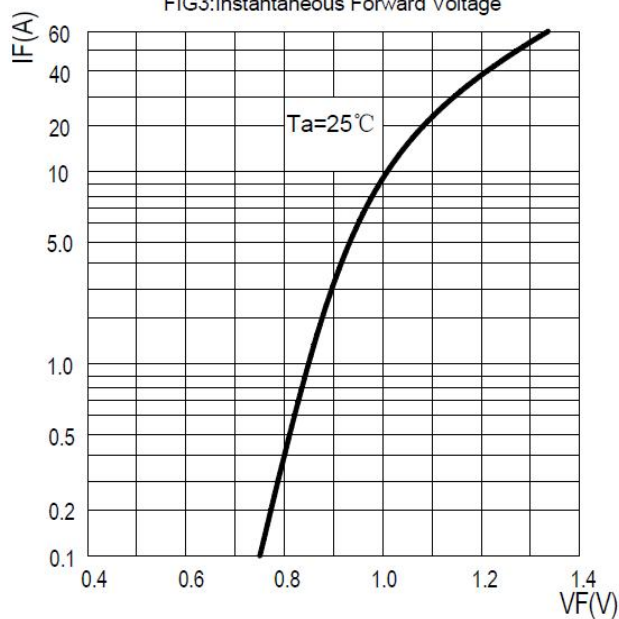


图4: 反向电流曲线  
FIG4: Typical Reverse Characteristics

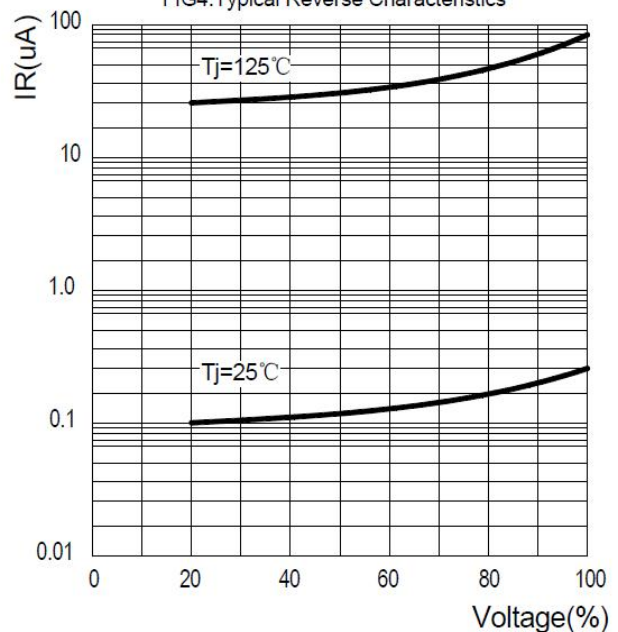

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bridge Rectifiers](#) category:*

*Click to view products by [Guchi](#) manufacturer:*

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)