



承认书

APPROVAL SHEET

客户名称: 深圳福昌辉科技有限公司
Customer

产品名称: 电感器
Part Name Inductor

客户料号:
Customer Part No.

产品规格: VLU0608-471KB
Specification

规格书编号: VLU0608-YH161015
Document No.

版本号: 01
Version No.

日期: 2017-10-17
DATE

| 制造 Manufacturer | | | 客户 Customer | | |
|--------------------|------------------|------------------|----------------|------------------|-------------------|
| 拟制 Draft by | 审核 Checked by | 确认 Approve by | 检验 Check by | 审核 Checked by | 批准 Approval by |
| 黄美艳 | 谭新霖 | 冯东梅 | | | |






| 序号 No. | 目 录 TABLE OF CONTENTS |
|-----------|--------------------------------|
| 1 | 概述 Summary |
| 2 | 型号规格表示办法 How To Order |
| 3 | 结构及尺寸 Structure And Dimensions |
| 4 | 材料清单 Material list |
| 5 | 电气性能 Performance Specification |
| 6 | 工作温度范围 Operation temperature |
| 7 | 贮存方法 Storage Methods |
| 8 | 使用注意事项 Precautions For Use |



3. 结构及尺寸 Structure And Dimensions

单位 Unit: mm

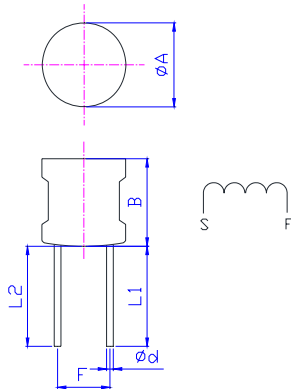

1. 套管包裹与本体顶部齐平

| A | B | d | F | L1 | L2 |
|---------|---------|----------|-----------|--------|--------|
| 8.0 MAX | 11.0MAX | 0.60±0.1 | 3.0 ± 0.5 | 15±2.0 | 15±2.0 |

4. 材料清单 Material list:

| No. | 组件 Component | 材料 Material | 型号规格 Part No. | UL 档案号码 UL file No. |
|-----|-----------------|------------------------------|---|------------------------|
| 1 | 磁芯 Core | 镍锌铁氧体 Ni-Zn Ferrite | VLU0608304030CP001 SR53 DRW6*8 FSO C3.0 E4.0 P3.0 or equivalent | 不适用 Not Applicable |
| 2 | 线材 Wire | 漆包 Enameled wire | 2UEW, $\phi 0.16\text{mm}$, 155 $^{\circ}\text{C}$, 126.5Ts(ref.) | E194410 |
| 3 | 套管 Tube | 热缩套管 Heat Shrinkable Tube | UL $\phi 7.0\text{ mm}$ | E180908 |
| 4 | 引脚 PINS | 镀锡铜包钢线 CP line | 0.60mm | 不适用 Not Applicable |

5. 电气性能 Performance Specification

| 项目 Item | 符号 | 标准 Spec. | 测试条件 Test condition | 测试仪器 Test instrument |
|-----------------------------------|------|--|-------------------------|--|
| 电感量 Inductance | L | 470 $\mu\text{H}\pm 10\%$ | 1KHz, 1.0V | MICOTEST 6377+6220 or equivalent |
| 直流电阻 Direct-current Resistance | DCR | 1.68 Ω MAX | at25 $^{\circ}\text{C}$ | CH3205AC or equivalent |
| 饱和电流 Saturation current | Isat | 0.31A $ \Delta L/L \leq 10\%$ | 1KHz, 1V | MICOTEST 6377+6220 or equivalent |
| 温升电流 Heat Rating Current | Irms | ----A $\Delta T < 40^{\circ}\text{C}$ | at25 $^{\circ}\text{C}$ | MICOTEST 6377+6220 Thermometer TES-1312A or equivalent |

6. 工作温度范围(包含元件自身发热)Operation temperature (Including self-heating temperature rise.) -25~+85 $^{\circ}\text{C}$ 。



7. 贮存方法 Storage Methods

7.1 存储期限 Storage Period

为保证端子电极的焊接特性和包装材料处于良好状态，请于本公司发货后 6 个月内使用本产品。同时，由于端子电极的焊接特性会随时间发生变化，如果贮存时间超过 6 个月，请首先确认其焊接特性后再安装使用。

To maintain the solderability of terminal electrodes and to keep the packing material in good condition, product should be used within 6 months from the time of delivery. And the solderability of products electrodes may decrease as time passes, so in case of storage over 6 months, solderability shall be checked before actual usage.

7.2 存储条件 Storage Conditions

(1)存放货物的仓库应满足以下条件 Store products in a warehouse in compliance with the following condition:

| 条件 Conditions | 元件含包装物 Packing status | 元件自身 Component itself |
|----------------|-----------------------|-----------------------|
| 温度 Temperature | -25~+40℃ | -25~+85℃ |
| 湿度 Humidity | 30~70%RH | 30~70%RH |

(2)不要使产品遭受温度和湿度的快速变化。

Do not subject products to rapid changes in temperature and humidity.

(3)不要将产品存放在化学环境中，如硫酸气体或碱性气体中，否则会降低电极端子的焊接特性和使电感器腐蚀。

Do not store the products in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas, that will causes poor solderability and corrosion of inductors.

(4)为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。

Store products on pallets to protect from humidity, dust, etc

(5)产品应避免热冲击、振动以及直接光照等等。

Avoid heat shock, vibration, direct sunlight, etc.

8. 使用注意事项 Precautions For Use

8.1 本公司产品适用于 AV 设备、OA 设备、家电、信息服务等一般电子设备中。

Our products are designed and promoted for use in general electronic devices such as audio-video equipment, office automation equipment, home appliance and information service.

8.2 当本公司的产品使用在一般电子设备以外的领域时，对于此所引发的设备失效我司将不承担任何法律责任。

In case of using the product for the purpose other than general electronics devices, we shall not be held liable for any dysfunctions in or damage to the equipment with which the product is used.

8.3 本承诺书只保证我司产品作为一个单体时的质量情况，当我司产品被安装到贵司产品上时，请贵司对使用在贵司电路上的产品情况进行了有效评价和确认。

Our specification limits the quality of the component as a single unit. Please ensure the component is thoroughly evaluated in your application circuit.

8.4 不要对产品施加过大的振动或机械冲击；

Do not apply excessive vibration or mechanical shock to products.

8.5 为防止断线，请不要使用锋利的物体接触线圈，如镊子；

Do not touch wire with sharp objects such as tweezers to prevent wire breakage.

8.6 在产品贴装时不要使用过大的压力，避免磁芯断裂。

Do not apply excessive stress to products mounted on boards to prevent core breakage.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Fenghua Advanced](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)