

SMMS SERIES


Molding POWER INDUCTOR.



Applications:

- PDA/Notebook/Desktop, and server applications.
- DC/DC converters in distributed power systems.
- DC/DC converter for Field Programmable Gate Array(FPGA).

Shape and Dimensions(Dimensions are in mm)

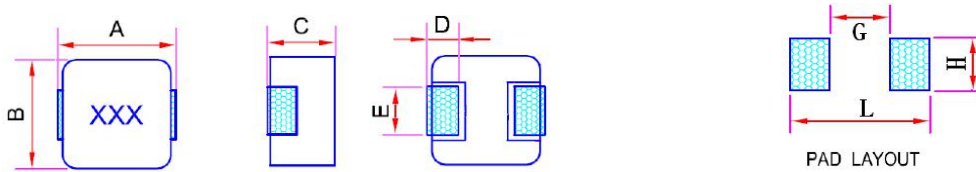

Item	A Max.	B Max.	C Max.	D	E	G	H	L
SMMS0630	7.30	6.60±0.3	3.0	1.6±0.5	3.0±0.5	3.7	3.5	8.0

Features :

- Low profile and DCR in this package footprint.
- Shielded construction.
- handles high transient current spikes without saturation
- F type frequency up to **3MHz**.
- Ultra low buzz noise, due to composite construction.
- RoHS compliant.

Product Identification:

SM MS 0630 - 2R2 M

(1) (2) (3) (4) (5)

- (1) Series : **Molding Power Inductors**.
- (2) Style : **F-Powder Type**
- (3) Dimensions : **0630** is size.
- (4) Inductance: **2R2** for **2.2** uH.
- (5) Inductance tolerance: **M**: ± 20%.

Characteristics:

- Saturation Current (Isat) : The current will cause L_0 to drop approximately 30% typical.
- Temperature Rise Current(Irms) : The current will cause the coil temperature rise approximately $\Delta T=40^\circ\text{C}$ without core Loss.
- Operating Temperature : -55°C to 125°C

Handling and precautions:

- Please contact us before cleaning this product.










Test equipments:

- L test by Hioki IM3536 LCR meter with Wayne kerr 3265B bias current source.
- DCR tested by Milli-ohm meter.
- Electrical specifications at 25°C .


● **SMMS0630 series**

Part No.	Inductance @100kHz L_0 (uH)	DCR (mΩ)		I sat (A) Typ.	I rms (A) Typ.
		Typical	Maximum		
SMMS0630-R15M	0.15	1.55	2.30	41.0	30.0
SMMS0630-R22M	0.22	1.60	2.50	35.0	25.0
SMMS0630-R47M	0.47	4.00	4.50	20.0	18.0
SMMS0630-R68M	0.68	4.75	5.30	19.0	16.0
SMMS0630-1R0M	1.0	6.60	7.25	15.5	13.0
SMMS0630-1R5M	1.5	13.2	16.0	18.0	12.5
SMMS0630-2R2M	2.2	16.5	20.0	14.0	8.50
SMMS0630-3R3M	3.3	24.5	35.0	12.0	7.00
SMMS0630-4R7M	4.7	35.0	40.0	9.00	6.00
SMMS0630-5R6M	5.6	36.0	42.0	7.00	5.70
SMMS0630-6R8M	6.8	44.3	48.0	6.00	5.10
SMMS0630-8R2M	8.2	60.0	64.9	6.00	5.00
SMMS0630-100M	10.0	64.5	68.0	5.50	4.59
SMMS0630-150M	15.0	103.0	112.0	4.60	3.10
SMMS0630-220M	22.0	126.0	135.0	3.50	2.60

Typical performance curves :

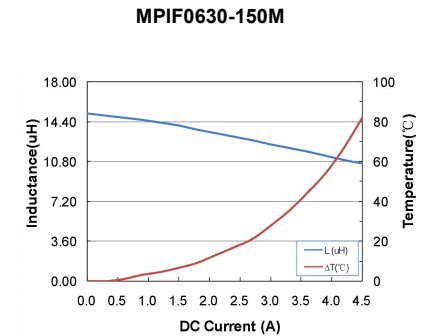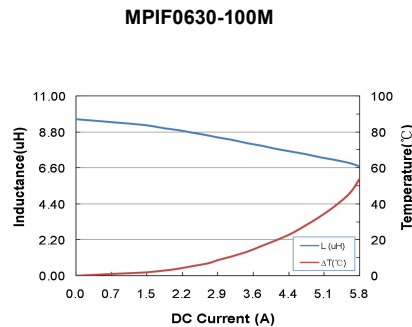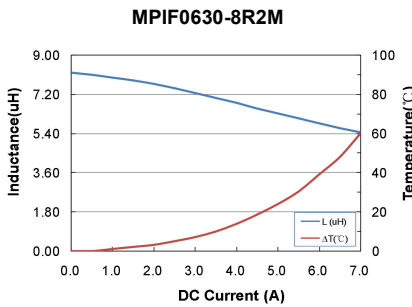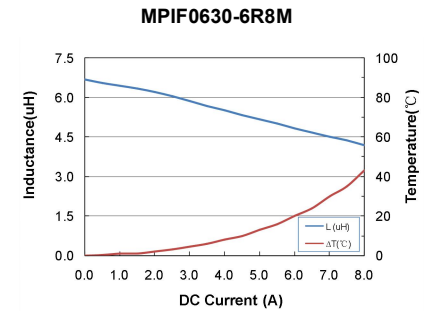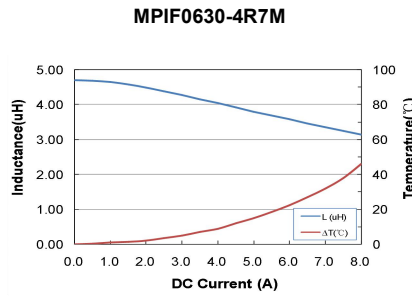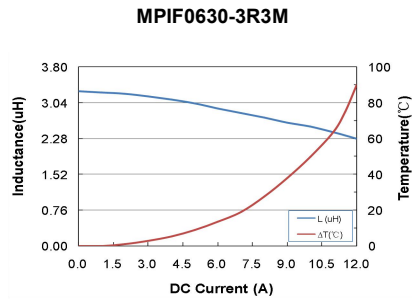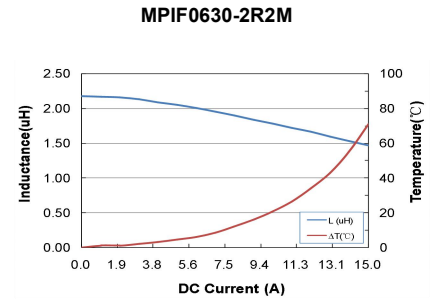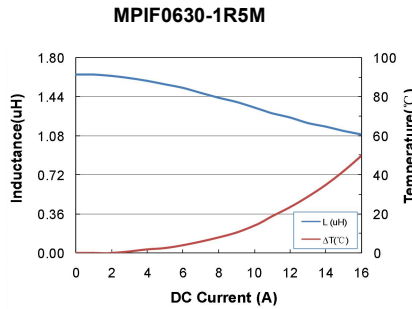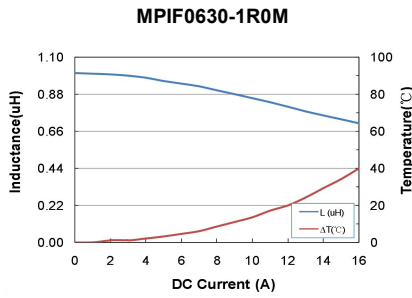

MPIF0630-220M

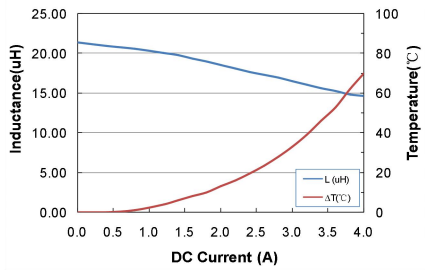

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [SXN](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)