

NB Series


- High reliability high temperature
- Endurance: +130°C 2,000 to 5,000 hours
- RoHS Compliant



◆ SPECIFICATIONS


Items	Characteristics								
Category	-40 to +130°C								
Temperature Range									
Rated Voltage Range	10 to 100V _{dc}								
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)								
Leakage Current	I ≅ 0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)								
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	10	16	25	35	50	63	100	(at 20°C, 120Hz)
	tanδ (Max.)	0.20	0.16	0.14	0.12	0.10	0.09	0.08	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	10	16	25	35	50	63	100	
	Z(-25°C)/Z(+20°C)	3	2						
	Z(-40°C)/Z(+20°C)	6	4	3					
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied at 130°C.								
	Capacitance change	≤ ±30% of the initial value					Case Dia		Lifetime (hours)
	D.F. (tanδ)	≤ 300% of the initial specified value					ØD = 8		2,000
	Leakage current	≤ The initial specified value					ØD = 10		3,000
						ØD ≥ 12.5		5,000	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 130°C without voltage applied.								
	Capacitance change	≤ ±30% of the initial value							
	D.F. (tanδ)	≤ 300% of the initial specified value							
	Leakage current	≤ 500% The initial specified value							

◆ DIMENSIONS [mm]

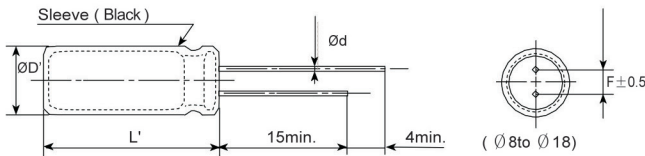

ØD	8	10	12.5	16	18
Ød	0.5	0.6	0.6	0.6	0.8
F	3.5	5.0	5.0	7.5	7.5
ØD'	ØD+0.5max.				
L'	L+2max.				

◆ PART NUMBER SYSTEM

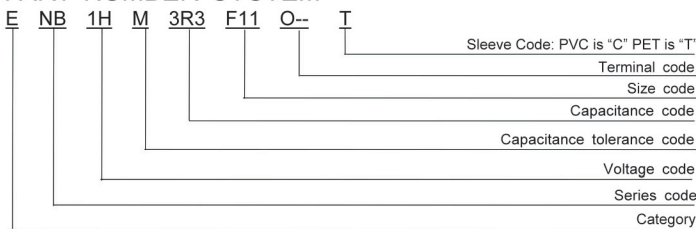

※ Sleeve Code and Terminal Code should follow the part number system

◆ RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current (Hz)

Cap. (μF)	50/60	120	1k	10k	100k
Cap. < 10	0.35	0.42	0.60	0.80	1.00
10 ≤ Cap. < 47	0.45	0.55	0.75	0.90	1.00
47 ≤ Cap. < 470	0.60	0.70	0.85	0.95	1.00
470 ≤ Cap. < 2200	0.65	0.75	0.90	0.98	1.00
Cap. ≥ 2200	0.75	0.80	0.95	1.00	1.00

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Aihua](#) manufacturer:

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)