

15N65

Power MOSFET

15A, 650V N-CHANNEL
POWER MOSFET

■ DESCRIPTION


The UTC 15N65 is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with planar stripe and DMOS technology. This technology is specialized in allowing a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC 15N65 is universally applied in active power factor correction and high efficient switched mode power supplies.

■ FEATURES

- * $R_{DS(ON)} < 0.65\Omega$ @ $V_{GS}=10V$, $I_D=7.5A$
- * High switching speed
- * Improved dv/dt capability

■ SYMBOL

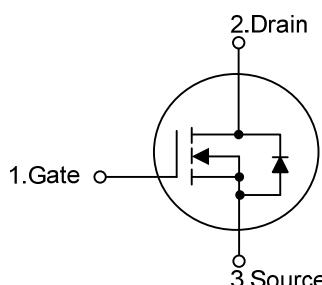


■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
15N65L-T47-T	15N65G-T47-T	TO-247	G	D	S	Tube
15N65L-TA3-T	15N65G-TA3-T	TO-220	G	D	S	Tube
15N65L-TC3-T	15N65G-TC3-T	TO-230	G	D	S	Tube
15N65L-TF1-T	15N65G-TF1-T	TO-220F1	G	D	S	Tube
15N65L-TF2-T	15N65G-TF2-T	TO-220F2	G	D	S	Tube
15N65L-TF3-T	15N65G-TF3-T	TO-220F	G	D	S	Tube
15N65L-TQ2-T	15N65G-TQ2-T	TO-263	G	D	S	Tube
15N65L-TQ2-R	15N65G-TQ2-R	TO-263	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

15N65L-T47-T	(1) T: Tube, R: Tape Reel (2) T47: TO-247, TA3: TO-220, TC3: TO-230, TF1: TO-220F1, TF2: TO-220F2, TF3: TO-220F, TQ2: TO-263 (3) L: Lead Free, G: Halogen Free and Lead Free
--------------	--

■ MARKING

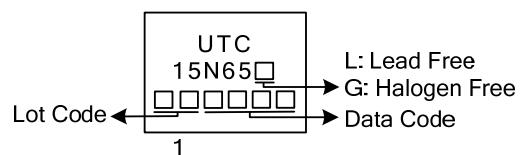

■ ABSOLUTE MAXIMUM RATINGS ($T_c=25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain to Source Voltage		V_{DSS}	650	V
Gate to Source Voltage		V_{GSS}	± 30	V
Continuous Drain Current	Continuous	I_D	15	A
	Pulsed (Note 2)	I_{DM}	60	A
Avalanche Current (Note 2)		I_{AR}	6.4	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	205	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	2.45	V/ns
Power Dissipation	TO-220/TO-230	P_D	250	W
	TO-263		54	W
	TO-220F		52	W
	TO-220F1/TO-220F2		312	W
	TO-247		+150	°C
Junction Temperature		T_J	-55 ~ +150	°C
Storage Temperature		T_{STG}		

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by maximum junction temperature.

3. L=10mH, $I_{AS}=6.4\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$

4. $I_{SD} \leq 15\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-220F	θ_{JA}	62.5	°C/W
	TO-220F1/TO-220F2			
	TO-230/TO-263			
Junction to Case	TO-247			
	TO-220/TO-230	θ_{JC}	0.5	°C/W
	TO-263			
	TO-220F			
	TO-220F1/TO-220F2			
	TO-247		2.3	°C/W
			2.4	°C/W
			0.4	°C/W



■ ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	650			V
Drain-Source Leakage Current	I_{DSS}	$V_{\text{DS}}=650\text{V}, V_{\text{GS}}=0\text{V}$		1		μA
Gate- Source Leakage Current	Forward	$V_{\text{GS}}=+30\text{V}, V_{\text{DS}}=0\text{V}$		+100		nA
	Reverse	$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$		-100		nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{\text{GS(TH)}}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2.0		4.0	V
Drain-Source On-State Resistance	$R_{\text{DS(ON)}}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=7.5\text{A}$		0.65		Ω
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}, f=1.0\text{MHz}$		2600		pF
Output Capacitance	C_{OSS}			260		pF
Reverse Transfer Capacitance	C_{RSS}			22		pF
SWITCHING PARAMETERS						
Total Gate Charge (Note 1)	Q_G	$V_{\text{DS}}=50\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=1.3\text{A}, I_G = 100\text{mA}$ (Note 1, 2)		155		nC
Gate-Source Charge	Q_{GS}			14		nC
Gate-Drain Charge	Q_{GD}			28		nC
Turn-ON Delay Time (Note 1)	$t_{\text{D(ON)}}$	$V_{\text{DD}}=30\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=0.5\text{A}, R_G=25\Omega$ (Note 1, 2)		105		ns
Turn-ON Rise Time	t_R			115		ns
Turn-OFF Delay Time	$t_{\text{D(OFF)}}$			600		ns
Turn-OFF Fall Time	t_F			120		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Body-Diode Continuous Current	I_S			15		A
Maximum Body-Diode Pulsed Current	I_{SM}			60		A
Drain-Source Diode Forward Voltage (Note 1)	V_{SD}	$I_S=15\text{A}, V_{\text{GS}}=0\text{V}$			1.4	V
Body Diode Reverse Recovery Time (Note 1)	t_{rr}	$I_S=15\text{A}, V_{\text{GS}}=0\text{V}, \frac{dI_F}{dt}=100\text{A}/\mu\text{s}$		510		ns
Body Diode Reverse Recovery Charge	Q_{rr}			8.2		μC







Notes: 1. Pulse Test : Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.





■ TEST CIRCUITS AND WAVEFORMS

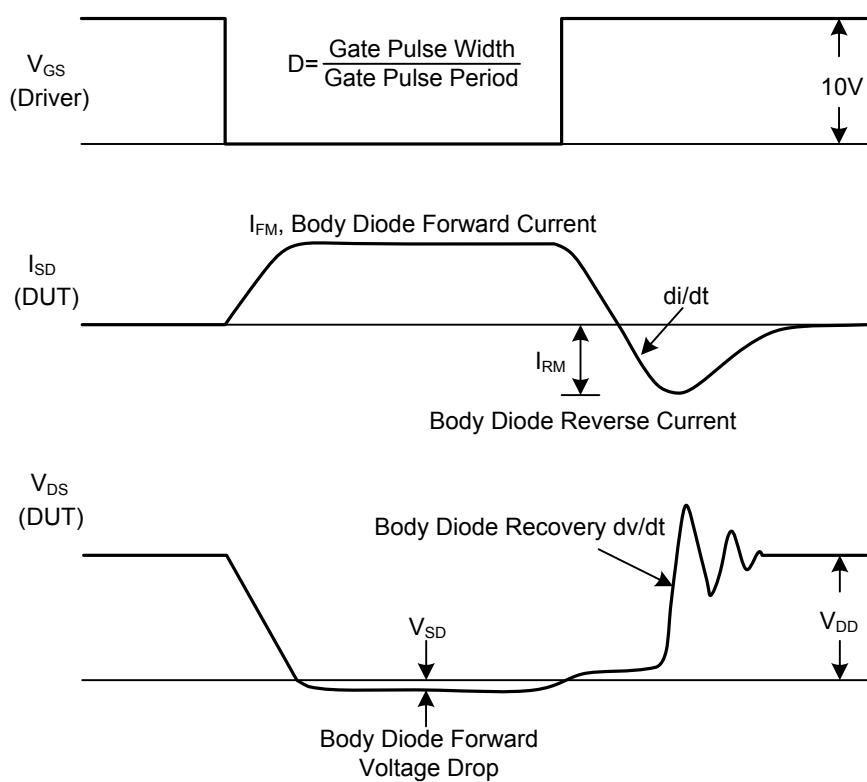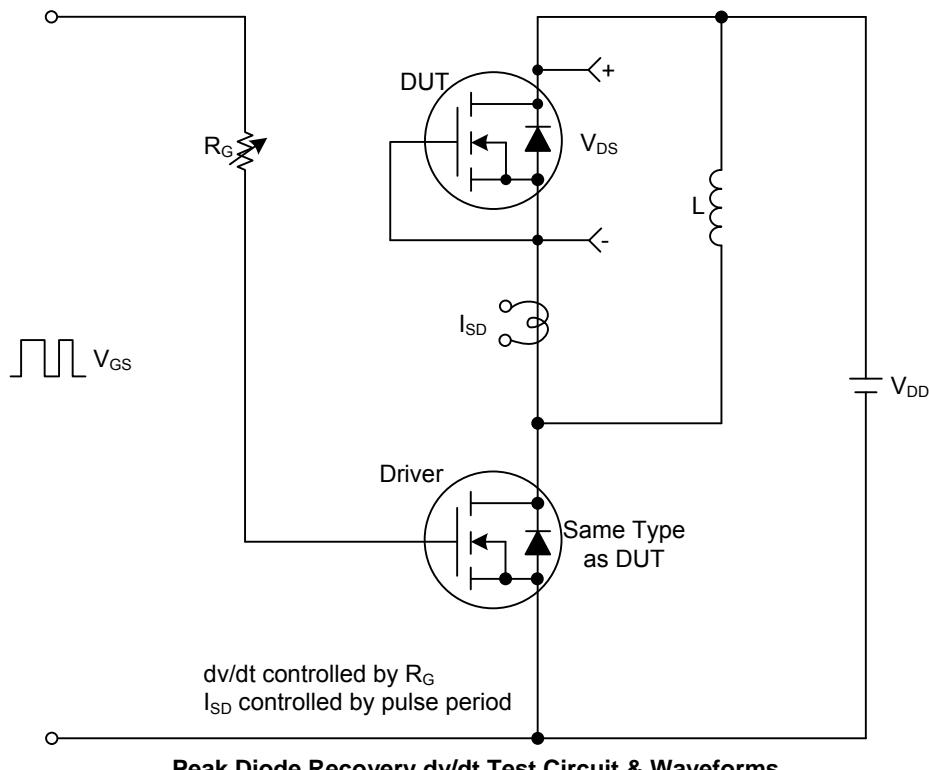

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

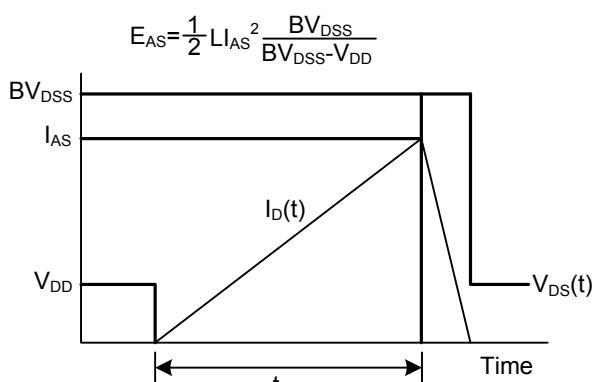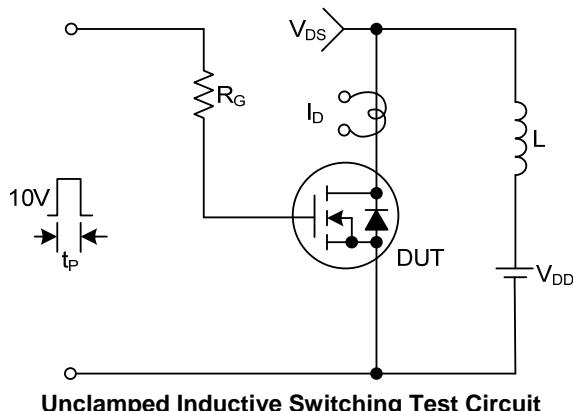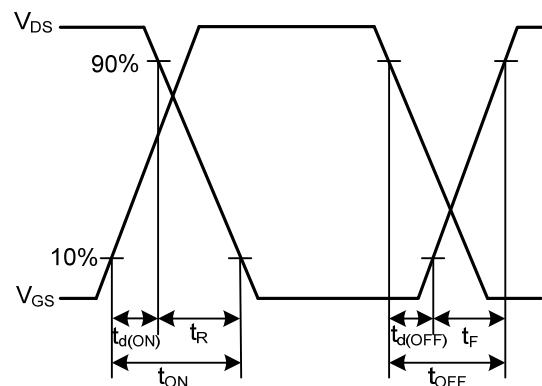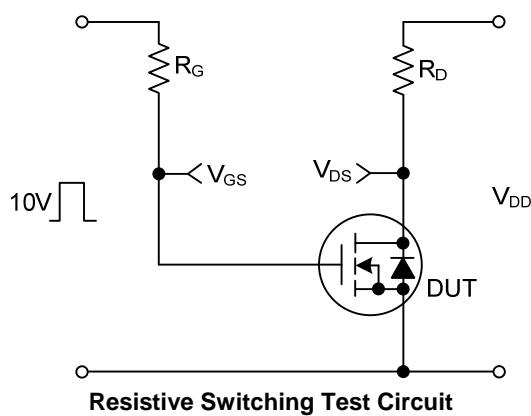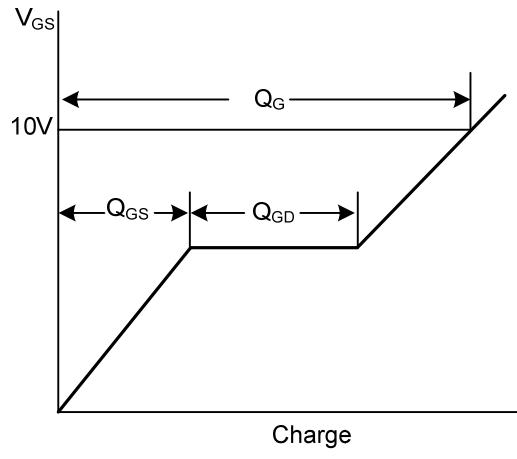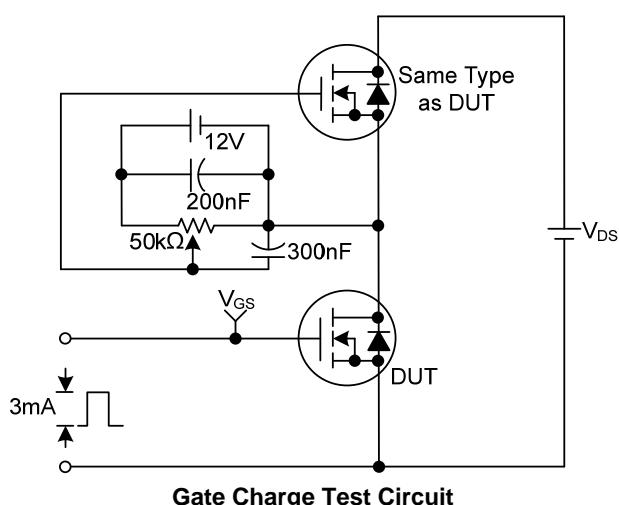

■ TYPICAL CHARACTERISTICS

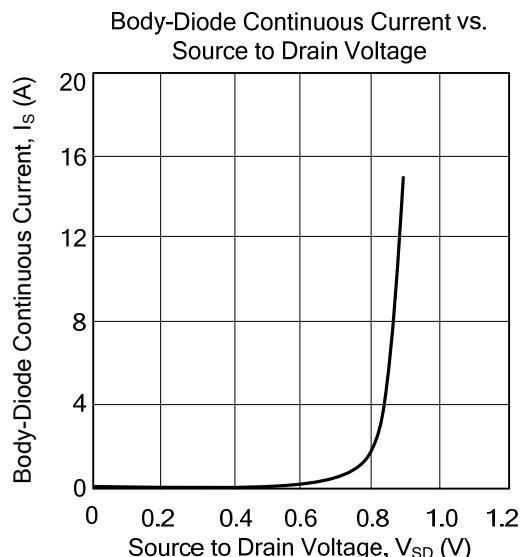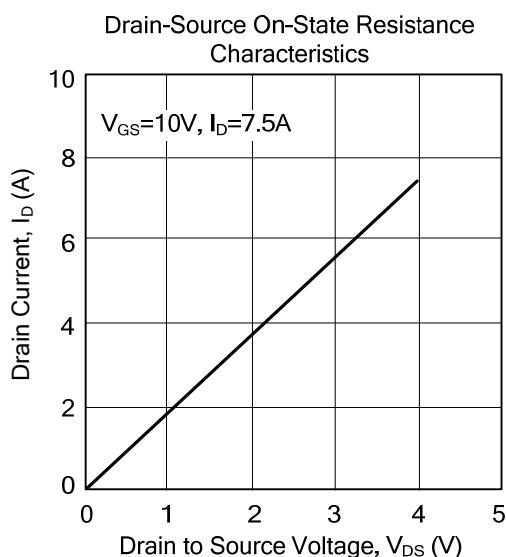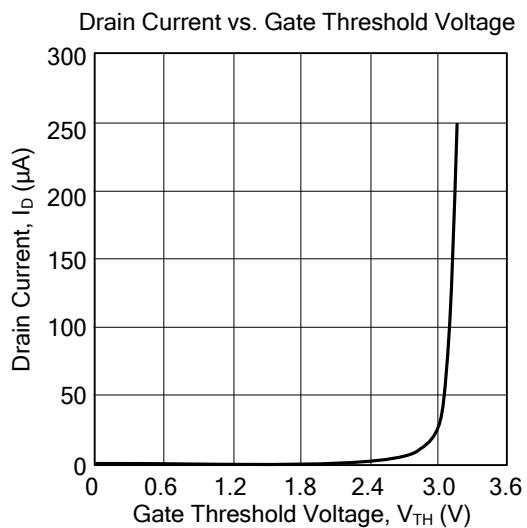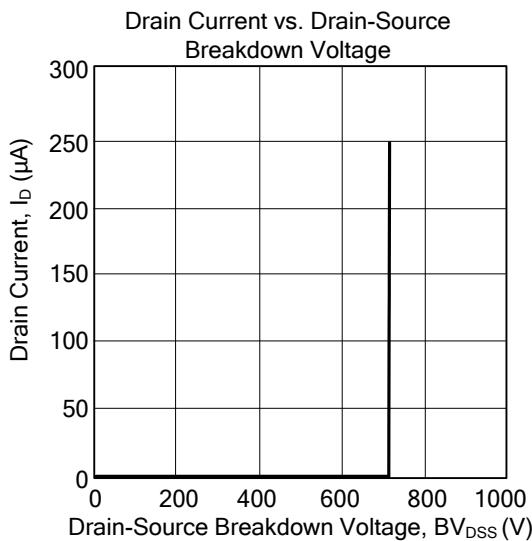

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Unisonic manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#)
[026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#) [IPS70R2K0CEAKMA1](#)
[RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#) [NTE6400](#) [JANTX2N6796U](#)
[JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#) [2SK2614\(TE16L1,Q\)](#)