

## VT 型片式铝电解电容

## VT Series Chip Type Aluminum Electrolytic Capacitors


### 特点 Features

- 产品直径 Case diameter:  $\Phi$  4mm –  $\Phi$  10mm.
- 适用于再流焊。 Reflow soldering is available.
- 适用于高密度表面组装。 Available for high density surface mounting.
- 工作温度范围宽 (-40 ~ +105℃) Operating over wide temperature range.
- ROHS 指令已对应完毕。 Adapted to the ROHS directive.

### 主要技术性能 Specifications

项目 Items	特性 Characteristics							
工作温度范围 Operating Temperature Range	-40℃ ~ +105℃							
额定电压范围 Rated Voltage Range	6.3V ~ 50V							
标称容量范围 Nominal Capacitance Range	0.1 ~ 1500 $\mu$ F							
标称容量允许偏差 Nominal Capacitance Tolerance	$\pm$ 20% (20℃, 120Hz)							
漏电流 Leakage Current	$I \leq 0.01C_R V_R$ or 3( $\mu$ A), 取较大者 (2分钟) $C_R$ : 标称容量 ( $\mu$ F) $U_R$ : 额定电压 (V) $I \leq 0.01C_R V_R$ or 3( $\mu$ A) Whichever is greater (at 20℃, After 2 minutes) $C_R$ : Nominal Capacitance ( $\mu$ F) $U_R$ : Rated voltages (V)							
损耗角正切 (tg $\delta$ ) Dissipation Factor (Max) 20℃, 120Hz	$U_R$ (V)	4	6.3	10	16	25	35	50
	tg $\delta$	0.35	0.28	0.24	0.20	0.16	0.14	0.12
耐久性 Load Life	+105℃施加额定电压 1000 小时后, 电容器应满足以下要求: After 1000 hours' application of rated voltage at 105℃, the capacitor shall meet the following requirement:							
	电容量变化率 Capacitance Change	±20%初始值以内 Within $\pm$ 20% of the initial value						
	损耗角正切 Dissipation Factor	$\leq$ 200%初始规定值 Not more than 200% of the initial specified value						
	漏电流 Leakage Current	$\leq$ 初始规定值 Not more than the initial specified value						
高温贮存 Shelf Life	+105℃贮存 1000 小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at +105℃, the capacitors shall meet the requirement of load life above							
低温特性 Low Temperature Stability	$U_R$ (V)	4	6.3	10	16	25	35	50
阻抗比 Impedance Ratio (120Hz)	Z(-25℃)/Z(+20℃)	7	4	3	2	2	2	2
	Z(-40℃)/Z(+20℃)	15	8	6	4	4	3	3
耐焊接热 Resistance to Soldering Heat	在 250℃的条件下, 电容器在热板上保持 30 秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250℃ for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.							
	电容量变化率 Capacitance Change	±10%初始值以内 Within $\pm$ 10% of the initial value						
	损耗角正切 (tg $\delta$ ) Dissipation Factor	$\leq$ 初始规定值 Not more than the initial specified value						
	漏电流 Leakage Current	$\leq$ 初始规定值 Not more than the initial specified value						

尺寸图 Dimensions

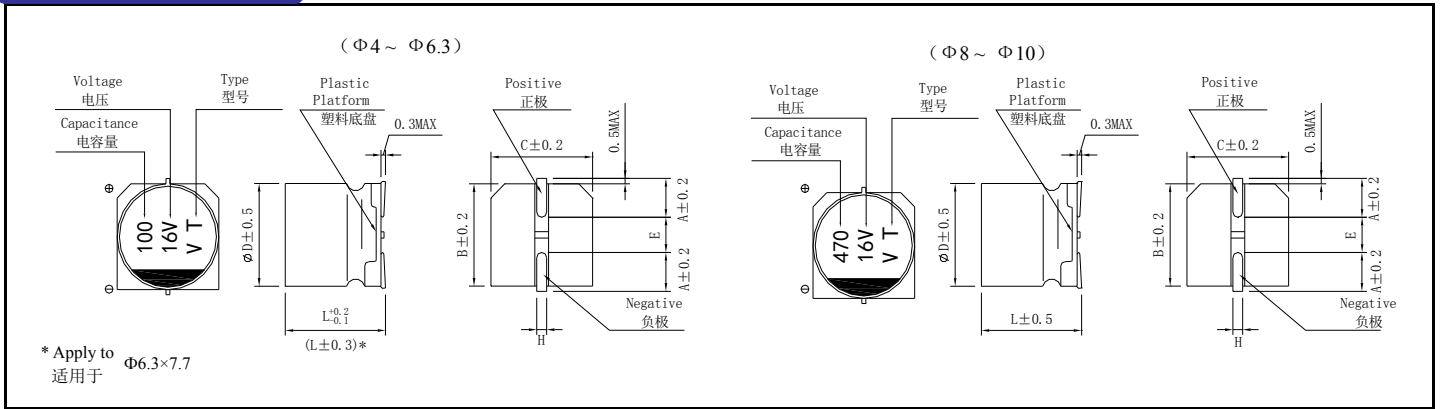

(mm)

	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 7.7	8 × 6.5	8 × 10.5	10 × 10.5
A	1.8	2.1	2.4	2.4	2.9	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5
L	5.4	5.4	5.4	7.7	6.5	10.5	10.5
H	0.5 ~ 0.8					0.8 ~ 1.1	

■ 标称电容量、额定电压、额定纹波电流与外形尺寸对应表

Nominal capacitance, rated voltage, rated ripple current and case size table

V μF	6.3		10		16		25		35		50	
	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA
0.1											4×5.4	2.3
0.22											4×5.4	3.4
0.33											4×5.4	4.1
0.47											4×5.4	5
1.0											4×5.4	10
2.2											4×5.4	16
3.3									4×5.4	13	4×5.4	16
4.7							4×5.4	22	4×5.4	22	5×5.4	23
10					4×5.4	28	5×5.4	28	5×5.4	30	6.3×5.4	32
22	4×5.4	29	5×5.4	30	5×5.4	39	6.3×5.4	55	6.3×5.4	60	6.3×7.7	51
33	5×5.4	34	5×5.4	34	5×5.4	35	6.3×5.4	65	8×6.5	84	6.3×7.7	70
47	5×5.4	46	6.3×5.4	48	6.3×5.4	70	6.3×5.4	70	6.3×7.7	80	6.3×7.7	80
100	6.3×5.4	71	6.3×5.4	69	6.3×5.4	70	6.3×7.7	100	8×10.5	296	8×10.5	230
220	6.3×7.7	120	6.3×7.7	120	6.3×7.7	120	8×10.5	320	10×10.5	435	10×10.5	375
330	8×10.5	290	8×10.5	305	8×10.5	425	10×10.5	450	10×10.5	450		
470	8×10.5	330	8×10.5	340	8×10.5	340	10×10.5	490				
1000	8×10.5	340	10×10.5	410	10×10.5	450						
1500	10×10.5	475										

└ I~ = Rated ripple current (mA) (105°C, 120Hz) I~ = 额定纹波电流 (mA) (105°C, 120Hz)

■ 额定纹波电流的频率系数 Frequency coefficient of ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	10K~100Hz
Coefficient 系数	0.70	1.00	1.17	1.36	1.50

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):*

*Click to view products by [Huawei manufacturer](#):*

Other Similar products are found below :

[GA0402A270FXBAC31G](#) [RVB-50V330MG10UQ-R](#) [RVJ-50V101MH10U-R](#) [RVZ-35V151MH10U-R2](#) [RC0J226M04005VR](#)  
[RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1C226M05005VR](#) [RC1C476M6L005VR](#) [RC1E107M6L07KVR](#) [RC1E336M6L005VR](#)  
[RC1H106M6L005VR](#) [RC1H475M05005VR](#) [RC1V227M10010VR](#) [RC1V476M6L006VR](#) [50SEV1M4X5.5](#) [TYEH1A336E55MTR](#)  
[TYEH1H106F55MTR](#) [TYEH1V106E55MTR](#) [35SEV47M6.3X8](#) [35SGV220M10X10.5](#) [VES2R2M1HTR-0405](#) [VZH102M1ATR-1010](#)  
[50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#) [SC1C476M05005VR](#) [SC1E107M0806BVR](#) [SC1E227M08010VR](#) [SC1H106M05005VR](#)  
[SC1H106M6L005VR](#) [SC1H227M10010VR](#) [SC1H335M04005VR](#) [CE4.7/50-SMD](#) [VEJ4R7M1VTR-0406](#) [VZH331M1ETR-0810](#)  
[VES101M1CTR-0605](#) [TYEH1H475E55MTR](#) [6.3SEV22M4X5.5](#) [6.3SEV47M4X5.5](#) [EEEFK1H151GP](#) [EEEFK1A681GP](#) [EEE0GA471XP](#)  
[EEEFK1V151GP](#) [RC1V107M6L07KVR](#) [VZH101M1VTR-0810](#) [VE010M1HTR-0405](#) [GYA1V151MCQ1GS](#) [EEH-ZC1J680P](#) [EEH-](#)  
[ZK1V181P](#) [GYA1V271MCQ1GS](#)