


CE-AX Series

Low Impedance



105°C, 1,000 to 2,000hours
 Surge proof (within 2 minutes)




Specifications

Items	Condition	Specifications							
Rated Voltage (V)	—	6.3	10	16	25	35	50		
Rated Voltage (V)	Room temperature	8.0	13	20	32	44	63		
Temperature range (°C)	—	-55 to +105							
Impedance tolerance (%)	120Hz/20°C	M : ±20							
Dissipation Factor (tan δ)	tan δ (max) 120Hz/20°C	φ4 to φ6.3	0.24	0.20	0.16	0.14	0.12	0.12	
		φ8 to φ16	0.28	0.24	0.20	0.16	0.14	0.14	
Rated Current (LC)	μA/after 2minutes (max)	Exceeding 1,000μF, +0.02 every 1,000μF							
Voltage ratio at temperature	Based the value at 120Hz, +20°C	-40°C Z/Z20°C	3	2	2	2	2	2	
		-55°C Z/Z20°C	5	4	4	3	3	3	
Life	105°C rated voltage applied (With the rated ripple current)	Test	φ4 to φ6.3, φ10 × 7.7 : 1,000hours, φ8 to φ16 : 2,000hours						
		ΔC/C	Within ±25% of the initial value						
		tan δ	Less than 200% of the specified value						
		LC	Less than the specified value						

Marking, Dimensions

(Unit : mm)

Part No.
 Rated Capacitance
 Series Symbol
 Rated Voltage(6.3V→6)

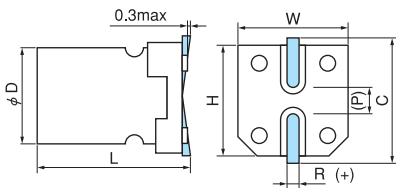

A pressure relief vent is provided for φD=8 or bigger

(P)reference size

D ^{+0.5max}	L ^{±0.3}	W ^{±0.2}	H ^{±0.2}	C ^{±0.2}	R	P
4	6.0	4.3	4.3	5.0	0.5 to 0.8	1.0
5	6.0	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	6.0	6.6	6.6	7.3	0.5 to 0.8	2.2
6.3	7.7	6.6	6.6	7.3	0.5 to 0.8	2.2
8	10.2	8.3	8.3	9.0	0.7 to 1.0	3.2
10	7.7	10.3	10.3	11.0	1.0 to 1.4	4.6
10	10.2	10.3	10.3	11.0	1.0 to 1.4	4.6
12.5	13.5 ^{±0.5}	12.8	12.8	13.5	1.0 to 1.4	4.6
16	16.5 ^{±0.5}	16.3	16.3	17.3	1.7 to 2.1	7.0

Part No.
 Indicated Only φD=16
 Rated Capacitance
 Series Symbol
 Rated Voltage(6.3V→6)

Impedance, Rated Ripple Current

V	6.3			10			16			25			35			50		
7													4x6.0	1.80	80	4x6.0	2.90	60
										4x6.0	1.80	80	5x6.0	0.76	150	6.3x6.0	0.88	165
							4x6.0	1.80	80	5x6.0	0.76	150	5x6.0	0.76	150			
				4x6.0	1.80	80	5x6.0	0.76	150	5x6.0	0.76	150	5x6.0	0.76	150	6.3x6.0	0.88	165
	4x6.0	1.80	80															
	→			5x6.0	0.76	150	→			6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x7.7	0.68	195
	5x6.0	0.76	150	→			6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x7.7	0.68	195
	5x6.0	0.76	150							6.3x6.0	0.44	230						
	→			6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x7.7	0.34	280			
	6.3x6.0	0.44	230	→			6.3x6.0	0.44	230	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.39	300
	6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.21	450
										→			10x7.7	0.17	450			
	6.3x6.0	0.44	230	6.3x7.7	0.34	280	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.21	450
										10x7.7	0.17	450						
	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.090	670	12.5x13.5	0.14	620
				→			10x7.7	0.17	450									
																12.5x13.5	0.14	620
	8x10.2	0.17	450	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.090	670	12.5x13.5	0.066	900			
				10x7.7	0.17	450												
	8x10.2	0.17	450	→			10x10.2	0.090	670				12.5x13.5	0.066	900			
	10x7.7	0.17	450															
	8x10.2	0.17	450	10x10.2	0.090	670				12.5x13.5	0.066	900				16x16.5	0.078	790
	10x10.2	0.090	670				12.5x13.5	0.066	900				16x16.5	0.052	1250			
				12.5x13.5	0.066	900				16x16.5	0.052	1250						
	12.5x13.5	0.066	900				16x16.5	0.052	1250									
				16x16.5	0.052	1250												
	16x16.5	0.052	1250															




Use the higher voltage model in the next page or to page 15 for different frequency coefficients.

Case size: φDxL(mm)
10x7.7:CE-AXA
16x16.5:CE-AXT

Rated ripple current
mA rms (100kHz, 105°C)

Impedance(Ω)
max at 100kHz, 20°C

Number

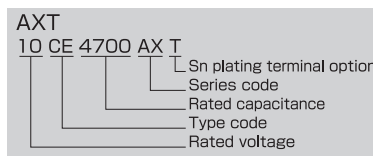

Aluminum Electrolytic Capacitors
Surface Mount Type

- CE-BE
- CE-BD
- CE-BS
- CE-BSS
- CE-FE
- CE-LD
- CE-FSS
- CE-FS
- CE-FH
- CE-LH
- CE-AX**
- CE-KX
- CE-GA
- CE-LS
- CE-ZX
- CE-ZC
- CE-LX
- CE-LL
- CE-LH(High Voltage)
- CE-PC
- CE-PH
- CE-PS
- CE-PF
- CE-TH
- CE-JX
- CE-NP
- CE-FN
- ME-SWB
- ME-UZ·SZ
- ME-UAX·SAX
- ME-SWG
- ME-HC
- ME-LS
- ME-CZ
- ME-CA
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-WG
- ME-FX
- ME-FH
- ME-PX
- ME-HPC·HPD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [SUN manufacturer](#):

Other Similar products are found below :

[GA0402A270FXBAC31G](#) [RVB-50V330MG10UQ-R](#) [RVJ-50V101MH10U-R](#) [RVZ-35V151MH10U-R2](#) [RC0J226M04005VR](#)
[RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1C226M05005VR](#) [RC1C476M6L005VR](#) [RC1E107M6L07KVR](#) [RC1E336M6L005VR](#)
[RC1H106M6L005VR](#) [RC1H475M05005VR](#) [RC1V227M10010VR](#) [RC1V476M6L006VR](#) [50SEV1M4X5.5](#) [TYEH1A336E55MTR](#)
[TYEH1H106F55MTR](#) [TYEH1V106E55MTR](#) [35SEV47M6.3X8](#) [35SGV220M10X10.5](#) [VES2R2M1HTR-0405](#) [VZH102M1ATR-1010](#)
[50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#) [SC1C476M05005VR](#) [SC1E107M0806BVR](#) [SC1E227M08010VR](#) [SC1H106M05005VR](#)
[SC1H106M6L005VR](#) [SC1H227M10010VR](#) [SC1H335M04005VR](#) [CE4.7/50-SMD](#) [VEJ4R7M1VTR-0406](#) [VZH331M1ETR-0810](#)
[VES101M1CTR-0605](#) [TYEH1H475E55MTR](#) [6.3SEV22M4X5.5](#) [6.3SEV47M4X5.5](#) [EEEFK1H151GP](#) [EEEFK1A681GP](#) [EEE0GA471XP](#)
[EEEFK1V151GP](#) [RC1V107M6L07KVR](#) [VZH101M1VTR-0810](#) [VE010M1HTR-0405](#) [GYA1V151MCQ1GS](#) [EEH-ZC1J680P](#) [EEH-](#)
[ZK1V181P](#) [GYA1V271MCQ1GS](#)