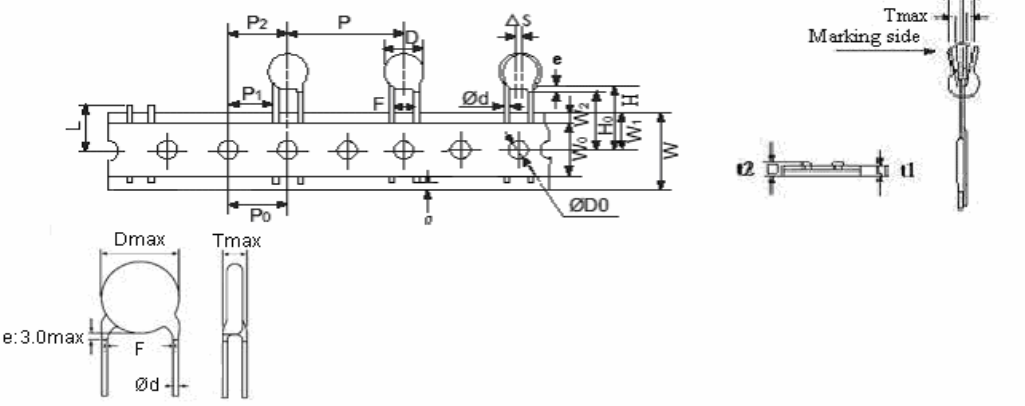
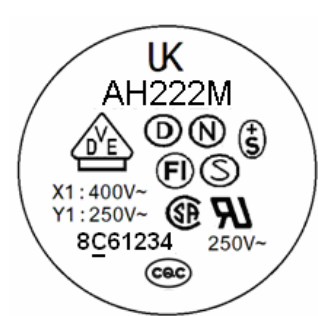


Product Specification 產品規格圖

CUSTOMER 客戶			SAP PART NO. :	YV0AH222M080BAMD0B	
CUSTOMER P/N 客戶料號			REV. 修正		
SPEC. DATE 日期	2018/10/19	DRAWN BY 經手人	YU ZHANG 2018/10/19	APPROVAL 核准	XJ XIAO 2018/10/19
C A P. 電容量	2200 p F TOL.允差 ±20%		WORKING VOLTAGE 工作電壓		X1: 400 VAC Y1: 250 VAC
D.F. 散逸因素	5.0% MAX. AT 1KHz±20% 測試 1.0 Vrms		TEST VOLTAGE 測試電壓		4000 VAC
I . R. 絕緣電阻	10000MΩMIN. at DC500±50V within 60±5sec of charging		T.C. 溫度特性		Y5V -80% ~ 30%
<div>■ 25.4mm pitch/lead spacing 10.0mm taping Lead Code: *BAMD0</div> <div></div>					MARKING
<div></div>					
Item			Symbol	Dimensions (mm)	
Pitch of component			P	25.4±2	
Pitch of sprocket			P0	12.7±0.3	
Lead spacing			F	10.0±1.0	
Length from hole center to component center			P2	12.7±1.5	
Length from hole center to lead			P1	7.7±1.5	
Body diameter			D	9.0 max	
Deviation along tape, left or right			△S	0±2.0	
Carrier tape width			W	18.0 +1/-0.5	
Position of sprocket hole			W1	9.0±0.5	
Lead distance between the bottom of body and the center of sprocket hole			H	20.0+1.5/-1.0	
Length from the terminal of the lead wire to the edge of carrier tape			ℓ	2.0min (Or the end of lead wire may be inside the hole-down tape.)	
Diameter of sprocket hole			D0	4.0±0.2	
Lead diameter			d	0.55±0.05	
Total tape thickness			t1	0.6±0.3	
Total thickness, tape and lead wire			t2	1.5 max.	
Deviation across tape			△h1/△h2	2.0 max.	
Portion to cut in case of defect			L	11.0 max.	
Hole-down tape width			W0	8.0 min.	
Hole-down tape distortion			W2	1.5±1.5.	
Coating extension on leads			e	3.0 max	
Body thickness			T	5.5 max	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [Walsin](#) manufacturer:

Other Similar products are found below :

[F339X134748MIP2T0](#) [F450KG153J250ALH0J](#) [750-1018](#) [FKP1-1500160010P15](#) [FKP1R031007D00JYSD](#) [FKP1R031507E00JYSD](#)
[FKP1U024707E00KYSD](#) [82DC4100CK60J](#) [82EC1100DQ50K](#) [PFR5101J100J11L16.5TA18](#) [PME261JB5220KR19T0](#) [A451GK223M040A](#)
[A561ED221M450A](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [R49AN347000A1K](#) [EEC2G505HQA406](#) [B25668A6676A375](#) [B25673A4282E140](#)
[BFC233868148](#) [BFC2370GC222](#) [C3B2AD44400B20K](#) [C4ASWBU3220A3EK](#) [CB027C0473J--](#) [CB177I0184J--](#) [CB182K0184J--](#) [23PW210](#)
[950CQW5H-F](#) [SBDC3470AA10J](#) [SCD105K122A3-22](#) [2N3155](#) [A571EH331M450A](#) [FKP1-2202KV5P15](#) [FKS3-680040010P10](#)
[QXL2E473KTPT](#) [445450-1](#) [B25669A3996J375](#) [46KI322000M1M](#) [46KR415050M1K](#) [4BSNBX4100ZBFJ](#) [MKP383510063JKP2T0](#)
[MKPY2-.02230020P15](#) [MKT 1813-368-015](#) [4055292001](#) [46KN410000N1K](#) [EEC2E106HQA405](#) [EEC2G205HQA402](#) [EEC2G805HQA415](#)
[P409CP224M250AH470](#) [82EC2150DQ50K](#)