


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

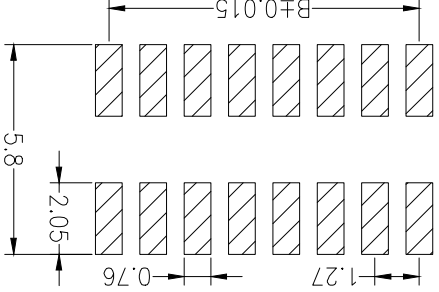

Ordering Information

23 43U-2 XX X N XX M N T 01

- 43=Ht,3mm Plastic high
- Per Row 01~50P No. of Pins
- Insulator Material Option
- F=LCP
- E=PA6T
- D=PA66
- C=PA6T
- B=PA66
- A=PBT
- G1:1.5U" Gold Contact Plating
- G2:1.5U" Gold
- G3:2U" Gold
- G4:3U" Gold
- G5:5U" Gold
- G6:10U" Gold
- G7:15U" Gold
- S0:Gold Flash/Tm
- SN:Tm
- Packing 01~99 code stream
- 0=PE Bag
- A=Troy
- T=tube
- P=Tube+Cap
- R=Reel+Cap
- M=Reel+Mylar

Dimensions	Per row	
	A	B
Contacts	26	33.42
Dimensions	1.27	34.69
Contacts	28	35.96
Dimensions	2.94	37.23
Contacts	30	38.50
Dimensions	4.21	39.77
Contacts	32	41.04
Dimensions	5.08	42.31
Contacts	34	43.58
Dimensions	6.75	44.85
Contacts	36	46.12
Dimensions	8.42	47.39
Contacts	38	48.66
Dimensions	10.10	49.93
Contacts	40	51.20
Dimensions	11.77	52.07
Contacts	42	53.34
Dimensions	13.44	54.61
Contacts	44	56.28
Dimensions	15.11	57.55
Contacts	46	58.82
Dimensions	16.78	60.09
Contacts	48	61.36
Dimensions	18.45	62.63
Contacts	50	63.90
Dimensions	20.12	64.88
Contacts	52	65.88
Dimensions	21.79	66.96
Contacts	54	68.00
Dimensions	23.46	69.09
Contacts	56	70.15
Dimensions	25.13	71.30
Contacts	58	72.45
Dimensions	26.80	73.60
Contacts	60	74.75
Dimensions	28.47	75.90
Contacts	62	77.05
Dimensions	30.14	78.20
Contacts	64	79.35
Dimensions	31.81	80.50
Contacts	66	81.65
Dimensions	33.48	82.80
Contacts	68	84.00
Dimensions	35.15	85.15
Contacts	70	86.50
Dimensions	36.82	87.65
Contacts	72	88.80
Dimensions	38.49	89.90
Contacts	74	91.15
Dimensions	40.16	92.40
Contacts	76	93.65
Dimensions	41.83	94.90
Contacts	78	96.15
Dimensions	43.50	97.40
Contacts	80	98.65
Dimensions	45.17	99.90
Contacts	82	101.15
Dimensions	46.84	102.40
Contacts	84	103.65
Dimensions	48.51	104.90
Contacts	86	106.15
Dimensions	50.18	107.40
Contacts	88	108.65
Dimensions	51.85	109.90
Contacts	90	111.40
Dimensions	53.52	112.65
Contacts	92	113.90
Dimensions	55.19	114.90
Contacts	94	116.15
Dimensions	56.86	117.40
Contacts	96	118.65
Dimensions	58.53	119.90
Contacts	98	121.15
Dimensions	60.20	122.40
Contacts	100	123.65
Dimensions	61.87	124.90
Contacts	102	126.15
Dimensions	63.54	127.40
Contacts	104	128.65
Dimensions	65.21	129.90
Contacts	106	131.15
Dimensions	66.88	132.40
Contacts	108	133.65
Dimensions	68.55	134.90
Contacts	110	136.15
Dimensions	70.22	137.40
Contacts	112	138.65
Dimensions	71.89	139.90
Contacts	114	141.15
Dimensions	73.56	142.40
Contacts	116	143.65
Dimensions	75.23	144.90
Contacts	118	146.15
Dimensions	76.90	147.40
Contacts	120	148.65
Dimensions	78.57	149.90
Contacts	122	151.15
Dimensions	80.24	152.40
Contacts	124	153.65
Dimensions	81.91	154.90
Contacts	126	156.15
Dimensions	83.58	157.40
Contacts	128	158.65
Dimensions	85.25	159.90
Contacts	130	161.15
Dimensions	86.92	162.40
Contacts	132	163.65
Dimensions	88.59	164.90
Contacts	134	166.15
Dimensions	90.26	167.40
Contacts	136	168.65
Dimensions	91.93	169.90
Contacts	138	171.15
Dimensions	93.60	172.40
Contacts	140	173.65
Dimensions	95.27	174.90
Contacts	142	176.15
Dimensions	96.94	177.40
Contacts	144	178.65
Dimensions	98.61	179.90
Contacts	146	181.15
Dimensions	100.28	182.40
Contacts	148	183.65
Dimensions	101.95	184.90
Contacts	150	186.15
Dimensions	103.62	187.40
Contacts	152	188.65
Dimensions	105.29	189.90
Contacts	154	191.15
Dimensions	106.96	192.40
Contacts	156	193.65
Dimensions	108.63	194.90
Contacts	158	196.15
Dimensions	110.30	197.40
Contacts	160	198.65
Dimensions	111.97	199.90
Contacts	162	201.15
Dimensions	113.64	202.40
Contacts	164	203.65
Dimensions	115.31	204.90
Contacts	166	206.15
Dimensions	116.98	207.40
Contacts	168	208.65
Dimensions	118.65	209.90
Contacts	170	211.15
Dimensions	120.32	212.40
Contacts	172	213.65
Dimensions	121.99	214.90
Contacts	174	216.15
Dimensions	123.66	217.40
Contacts	176	218.65
Dimensions	125.33	219.90
Contacts	178	221.15
Dimensions	127.00	222.40
Contacts	180	223.65
Dimensions	128.67	224.90
Contacts	182	226.15
Dimensions	130.34	227.40
Contacts	184	228.65
Dimensions	132.01	229.90
Contacts	186	231.15
Dimensions	133.68	232.40
Contacts	188	233.65
Dimensions	135.35	234.90
Contacts	190	236.15
Dimensions	137.02	237.40
Contacts	192	238.65
Dimensions	138.69	239.90
Contacts	194	241.15
Dimensions	140.36	242.40
Contacts	196	243.65
Dimensions	142.03	244.90
Contacts	198	246.15
Dimensions	143.70	247.40
Contacts	200	248.65
Dimensions	145.37	249.90
Contacts	202	251.15
Dimensions	147.04	252.40
Contacts	204	253.65
Dimensions	148.71	254.90
Contacts	206	256.15
Dimensions	150.38	257.40
Contacts	208	258.65
Dimensions	152.05	259.90
Contacts	210	261.15
Dimensions	153.72	262.40
Contacts	212	263.65
Dimensions	155.39	264.90
Contacts	214	266.15
Dimensions	157.06	267.40
Contacts	216	268.65
Dimensions	158.73	269.90
Contacts	218	271.15
Dimensions	160.40	272.40
Contacts	220	273.65
Dimensions	162.07	274.90
Contacts	222	276.15
Dimensions	163.74	277.40
Contacts	224	278.65
Dimensions	165.41	279.90
Contacts	226	281.15
Dimensions	167.08	282.40
Contacts	228	283.65
Dimensions	168.75	284.90
Contacts	230	286.15
Dimensions	170.42	287.40
Contacts	232	288.65
Dimensions	172.09	289.90
Contacts	234	291.15
Dimensions	173.76	292.40
Contacts	236	293.65
Dimensions	175.43	294.90
Contacts	238	296.15
Dimensions	177.10	297.40
Contacts	240	298.65
Dimensions	178.77	299.90
Contacts	242	301.15
Dimensions	180.44	302.40
Contacts	244	303.65
Dimensions	182.11	304.90
Contacts	246	306.15
Dimensions	183.78	307.40
Contacts	248	308.65
Dimensions	185.45	309.90
Contacts	250	311.15
Dimensions	187.12	312.40
Contacts	252	313.65
Dimensions	188.79	314.90
Contacts	254	316.15
Dimensions	190.46	317.40
Contacts	256	318.65
Dimensions	192.13	319.90
Contacts	258	321.15
Dimensions	193.80	322.40
Contacts	260	323.65
Dimensions	195.47	324.90
Contacts	262	326.15
Dimensions	197.14	327.40
Contacts	264	328.65
Dimensions	198.81	329.90
Contacts	266	331.15
Dimensions	200.48	332.40
Contacts	268	333.65
Dimensions	202.15	334.90
Contacts	270	336.15
Dimensions	203.82	337.40
Contacts	272	338.65
Dimensions	205.49	339.90
Contacts	274	341.15
Dimensions	207.16	342.40
Contacts	276	343.65
Dimensions	208.83	344.90
Contacts	278	346.15
Dimensions	210.50	347.40
Contacts	280	348.65
Dimensions	212.17	349.90
Contacts	282	351.15
Dimensions	213.84	352.40
Contacts	284	353.65
Dimensions	215.51	354.90
Contacts	286	356.15
Dimensions	217.18	357.40
Contacts	288	358.65
Dimensions	218.85	359.90
Contacts	290	361.15
Dimensions	220.52	362.40
Contacts	292	363.65
Dimensions	222.19	364.90
Contacts	294	366.15
Dimensions	223.86	367.40
Contacts	296	368.65
Dimensions	225.53	369.90
Contacts	298	371.15
Dimensions	227.20	372.40
Contacts	300	373.65
Dimensions	228.87	374.90
Contacts	302	376.15
Dimensions	230.54	377.40
Contacts	304	378.65
Dimensions	232.21	379.90
Contacts	306	381.15
Dimensions	233.88	382.40
Contacts	308	383.65
Dimensions	235.55	384.90
Contacts	310	386.15
Dimensions	237.22	387.40
Contacts	312	388.65
Dimensions	238.89	389.90
Contacts	314	391.15
Dimensions	240.56	392.40
Contacts	316	393.65
Dimensions	242.23	394.90
Contacts	318	396.15
Dimensions	243.90	397.40
Contacts	320	398.65
Dimensions	245.57	399.90
Contacts	322	401.15
Dimensions	247.24	402.40
Contacts	324	403.65
Dimensions	248.91	404.90
Contacts	326	406.15
Dimensions	250.58	407.40
Contacts	328	408.65
Dimensions	252.25	409.90
Contacts	330	411.15
Dimensions	253.92	412.40
Contacts	332	413.65
Dimensions	255.59	414.90
Contacts	334	416.15
Dimensions	257.26	417.40
Contacts	336	418.65
Dimensions	258.93	419.90
Contacts	338	421.15
Dimensions	260.60	422.40
Contacts	340	423.65
Dimensions	262.27	424.90
Contacts	342	426.15
Dimensions	263.94	427.40
Contacts	344	428.65
Dimensions	265.61	429.90
Contacts	346	431.15
Dimensions	267.28	432.40
Contacts	348	433.65
Dimensions	268.95	434.90
Contacts	350	436.15
Dimensions	270.62	437.40
Contacts	352	438.65
Dimensions	272.29	439.90
Contacts	354	441.15
Dimensions	273.96	442.40
Contacts	356	443.65
Dimensions	275.63	444.90
Contacts	358	446.15
Dimensions	277.30	447.40
Contacts	360	448.65
Dimensions	278.97	449.90
Contacts	362	451.15
Dimensions	280.64	452.40
Contacts	364	453.65
Dimensions	282.31	454.90
Contacts	366	456.15
Dimensions	283.98	457.40
Contacts	368	458.65
Dimensions	285.65	459.90
Contacts	370	461.15
Dimensions	287.32	462.40
Contacts	372	463.65
Dimensions	288.99	464.90
Contacts	374	466.15
Dimensions	290.66	467.40
Contacts	376	468.65
Dimensions	292.33	469.90
Contacts	378	471.15
Dimensions	294.00	472.40
Contacts	380	473.65
Dimensions	295.67	474.90
Contacts	382	476.15
Dimensions	297.34	477.40
Contacts	384	478.65
Dimensions	299.01	479.90
Contacts	386	481.15
Dimensions	300.68	482.40
Contacts	388	483.65
Dimensions	302.35	484.90
Contacts	390	486.15
Dimensions	304.02	487.40
Contacts	392	488.65
Dimensions	305.69	489.90
Contacts	394	491.15
Dimensions	307.36	492.40

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HOAUC](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)