	DATASHEET	Part No.
	COMMON MODE ESD FILTER	ACFE1A2G500E

CUSTOMER : _____


DATA SHEET

Product Name : COMMON MODE ESD FILTER

Part No : ACFE1A2G500E

Revision Date : 2012/11/23

Customer Code : _____

	Address : AMOTECH. CO. LTD., 17-2 ,JAMWON-DONG, SEOCHO-GU, SEOUL,KOREA Contact : TEL) 82-2-544-1351, FAX) 82-2-517-7183
---	---



DATASHEET

Part No.

COMMON MODE ESD FILTER

ACFE1A2G500E

1. Parts description

1.1. Overview

ACF series is multi-layer chip Common Mode Filter for high speed differential transmission line. This product shows excellent noise reduction without signal loss by high coupled Inductor pair.

1.2. Features

- Excellent noise reduction without signal loss
- Built-in two ESD suppression devices each line
- Low profile (thickness = 0.6mm)
- Ceramic multilayer type SMD component
- RoHS compliance

1.3. Applications

- High speed differential transmission lines at electronic devices (ex. MHL, HDMI, etc.)
- LCD/PDP TV, DSC, DVC, DVD player, notebook, PC, portable audio player, mobile phones, etc.

2. Model and Lot Number description

2.1. Model


<u>ACF</u>	<u>E</u>	<u>1A</u>	<u>2</u>	<u>G</u>	<u>500</u>	<u>E</u>
(1)	(2)	(3)	(4)	(5)	(6)	(7)

- (1) Series name
- (2) Material code : "E" - ESD suppression devices
- (3) Chip size : "1A" - 1.25 X 1.0 mm
- (4) Number of Lines : "2" - 2 lines
- (5) Characteristics : "G" - for Gbps
- (6) Impedance : "500" - 50Ω
- (7) Internal code


3. Style and Dimension

3.1. Appearance and dimension

• Top view




• Side view



Item	Size (mm)
L	1.00 ± 0.10
W	1.25 ± 0.10
T	0.60 ± 0.05
SL	0.15 ± 0.05
SW	0.30 ± 0.05
GL	0.15 ± 0.05
GW	0.30 ± 0.05
P	0.55 ± 0.10

3.2. Equivalent circuit & Pin description



※ No Polarity & Directionality

No.	Pin Description
①/④	In/ Out line (Data)
②/③	In/ Out line (Data)
⑤, ⑥	Ground (Common)

4. Structure and materials


	Item	Material
	Body1	Ni-Zn Ferrite
	Body2	Glass + Alumina
	Internal electrode	Ag
	External electrode	Ag - Ni- Sn
	Plate layer	Ni ≥ 1 μm, Sn ≥ 2 μm

5. Specifications


5.1. Electrical characteristics

Parameter	Common Mode Impedance @ 100 MHz	DC Resistance	Capacitance @ 1MHz	Rated Voltage	Rated Current	Insulation Resistance	Leakage Current @ 5Vdc
Symbol	Z_{CM}	R_{DC}	C_P	V_{DC}	I_{DC}	IR	I_L
Units	Ω	Ω	pF	V (DC)	mA (DC)	$M\Omega$	μA
Value	$50 \pm 25\%$	Max. 2.0	Max. 1.2	10	100	Min. 10	Max. 1

5.2. Frequency and ESD characteristics

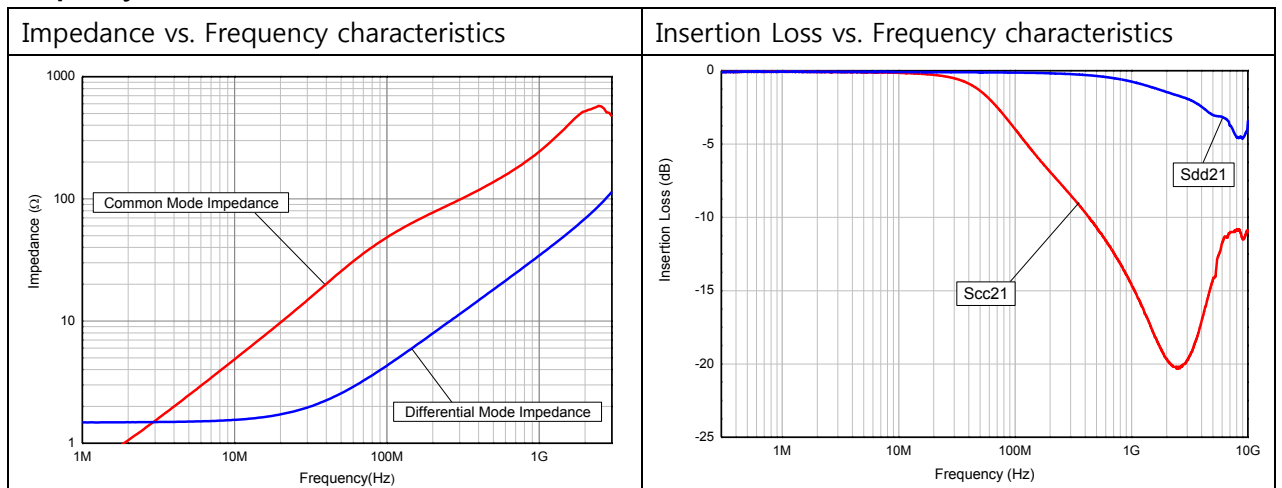

ESD Pulse waveform (IEC 61000-4-2 contact 8kV)

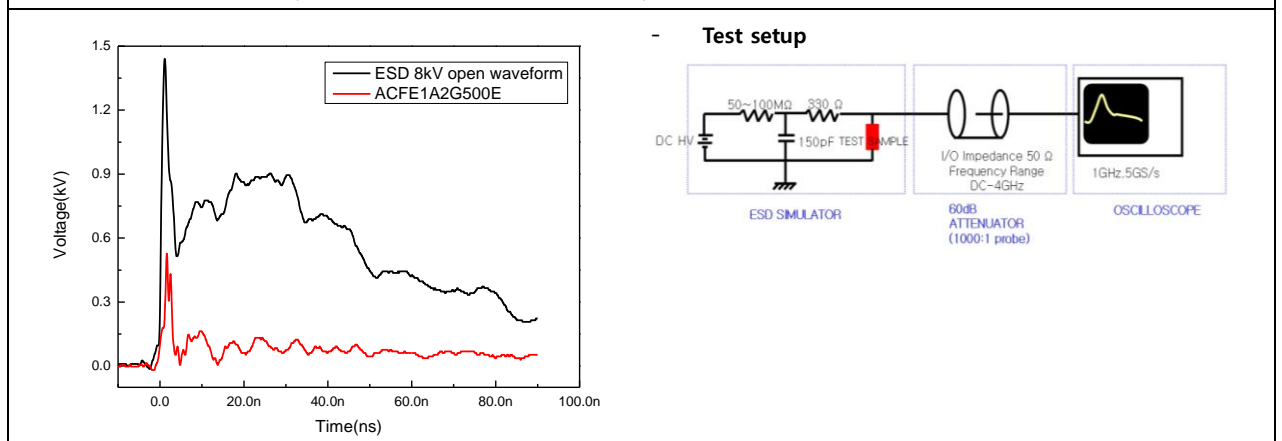


5.3. Temperature range

- 1) Operating Temperature range : -40 ~ +85°C
- 2) Storage Temperature range : -40 ~ +85°C

6. Soldering (Reflow soldering)


6.1. Soldering condition

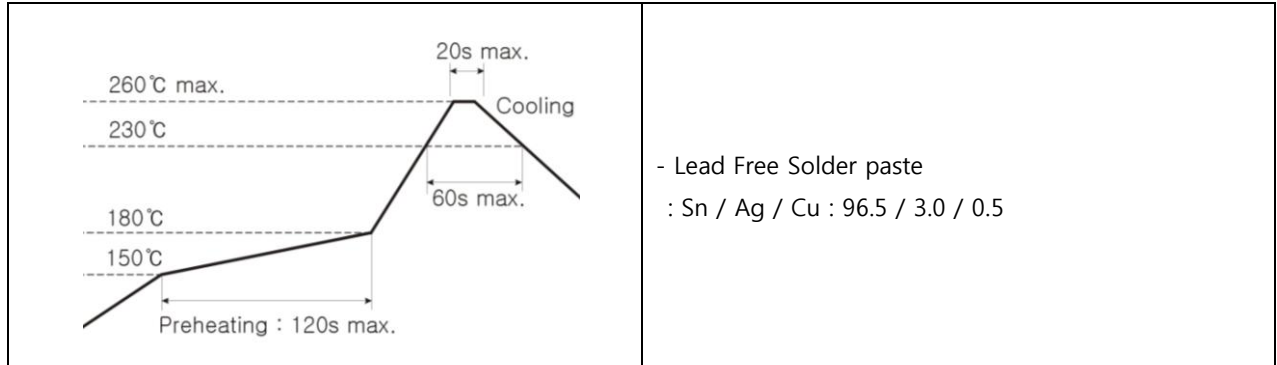

Follow the recommended soldering conditions to avoid degradation of performance .

- This product is designed for reflow soldering only. Do not use flow soldering.
- Use non-activated flux. (Max. Cl content less than 0.2%)
- Reflow cycle times should be done less than 3 times.

6.2. PCB pattern design condition (recommended)

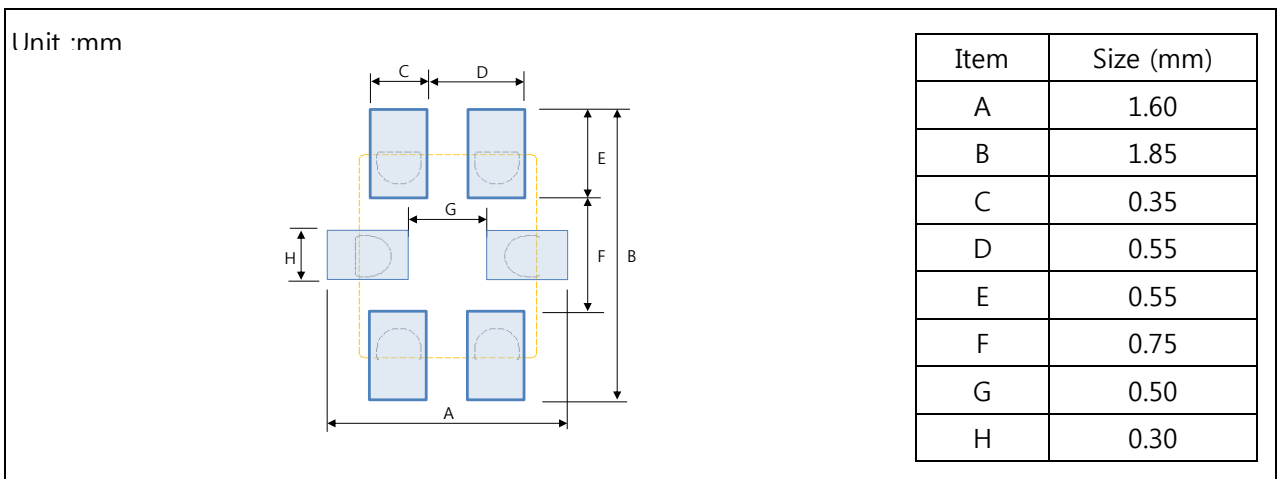


7. Caution

- 1) Storage environment : -5~40°C temperature, 20~70% humidity (MSL Level 1)
- 2) Do not use in high temperature/high humidity and a corrosive atmosphere like sulfide, chloride gas which could damage the solderability.
- 3) Do not expose to mechanical shock to avoid crack.
- 4) Use chips within 6 months. If over 6 months, check solderability before use.

8. Packaging specification


8.1 Carrier tape Specification

8.1.1. Size

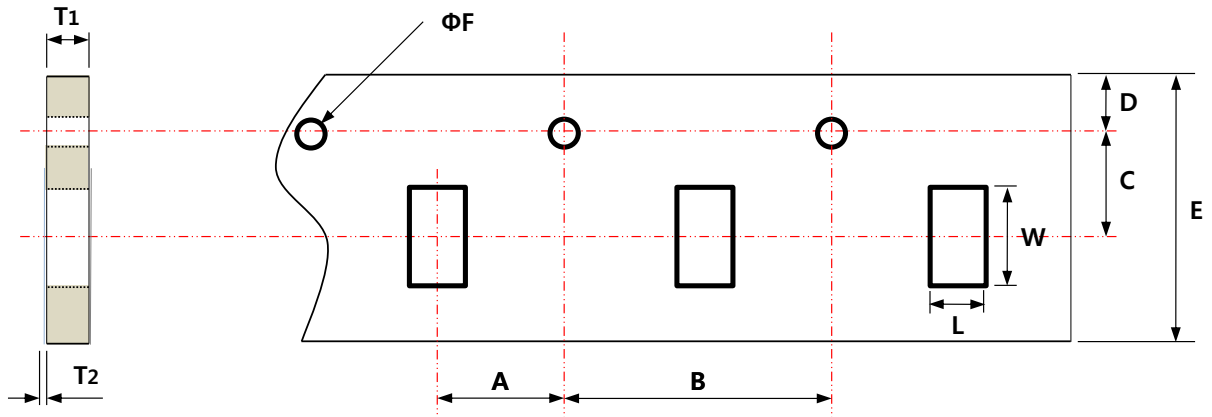

	L	W	A	B	C	D	E	ΦF	T1	T2
Tolerance	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	+0.10	±0.10	Max.
Spec (mm)	1.20	1.45	2.00	4.00	3.50	1.75	8.00	1.55	0.75	0.10

8.1.2. Chip Locations

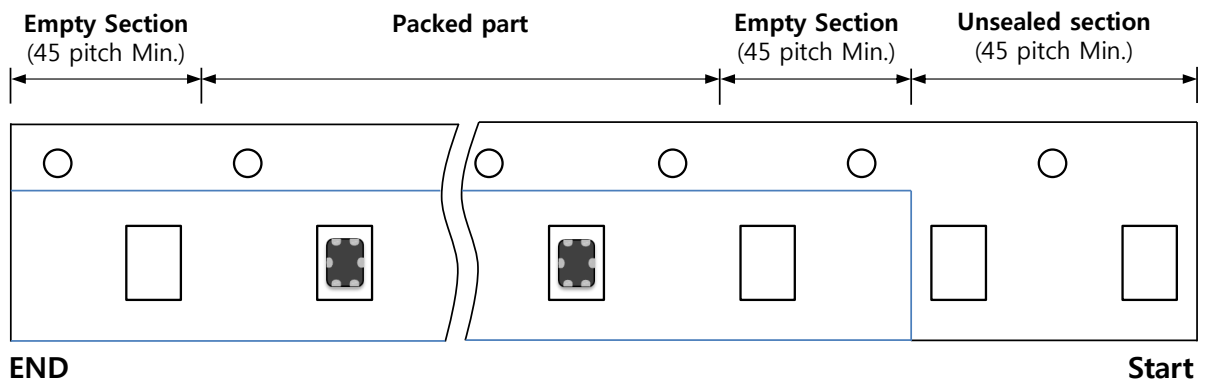


8.1.3. Material

- 1) Pater carrier tape : Laminated virgin pulp
- 2) Top tape : Polyester film
- 3) Bottom tape : Adhesive coated paper


8.2. Reel Specification

8.2.1. Size

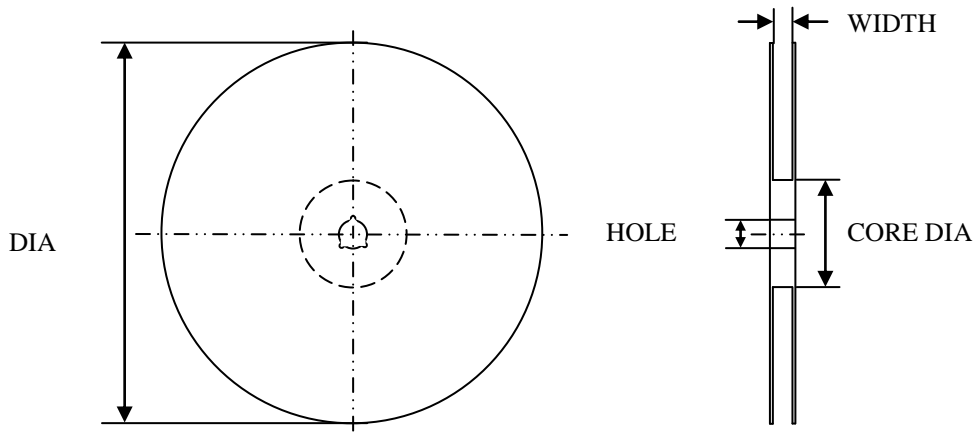


Item	DIA	WIDTH	CORE DIA	HOLE
Size (mm)	178.0±0.5	9.0±0.5	60.0±1.0	13.2±0.3

8.2.2. Label adherence and winding direction

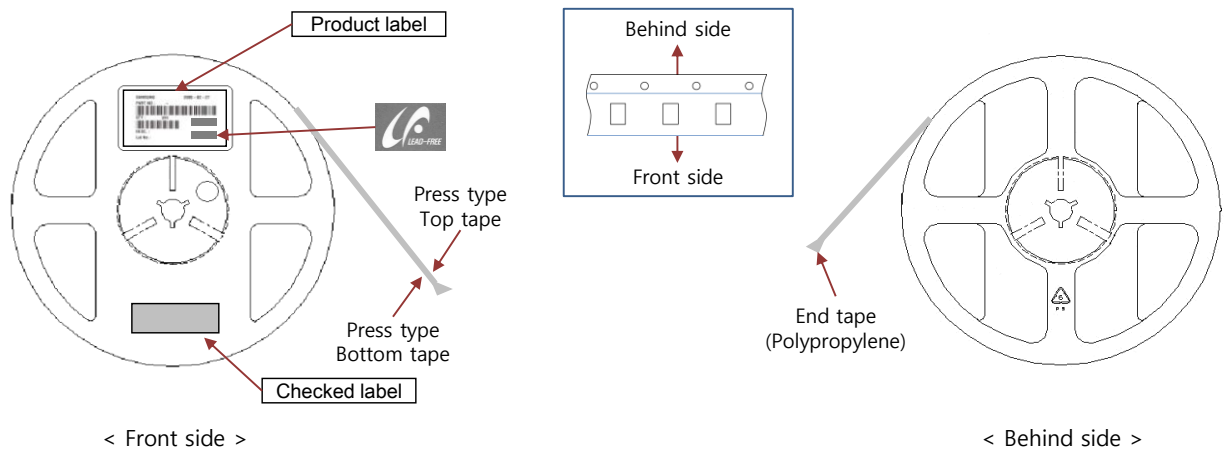
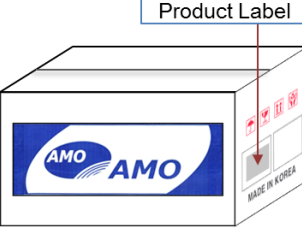
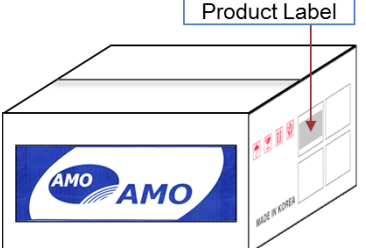


8.2.3. Material

- 1) Carrier Tape : PET / PC / PS
- 2) Plastic reel : GPS(General Purpose Styrene)

	DATASHEET	Part No.
	COMMON MODE ESD FILTER	ACFE1A2G500E

8.3 Box packaging Specification

Box	Small	Medium	Large
Size (mm)	183 (W) x 185 (D) x 70 (T)	200 (W) x 375 (D) x 205 (T)	375 (W) x 390 (D) x 205 (T)
Quantity	5 reel = 4,000 ea/reel x 5 = 20,000 ea	5 small boxes = 4,000 ea/reel X 25 = 100,000 ea	10 Medium boxes = 4,000 ea/reel X 50 = 200,000 ea
Detail			

8.4. Label Specification

Size : Reel & Small boxes : 80 X 40 (mm)

Medium & Large boxes : 100 X 100 (mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [AMOTECH](#) manufacturer:

Other Similar products are found below :

[RGCMF1210900H3T](#) [B82722A2102N001](#) [UAL21V07012500](#) [UAL24VR06500CH](#) [UALSC0220G0000](#) [UALSC058000000](#)
[UALSC0580J0000](#) [UALSC1520JH000](#) [UALSU10VR15019](#) [UALSU10VR20010](#) [UALSU16VD30030](#) [UALSU16VD40010](#)
[UALSU9H0305000](#) [UALSU9HF030600](#) [UALSU9HF060300](#) [UALSU9HR050340](#) [UALSU9VD070100](#) [UALSU9VR070170](#) [5701610000](#)
[CM7060M132R-10](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9VD070400](#) [UALSU9V0701000](#) [UALSU9HR030900](#)
[UALSU9HF050500](#) [UALSU9H0701000](#) [UALSU9H0208000](#) [UALSU9H0110000](#) [UALSCF25081300](#) [UALSC0305GS000](#)
[UALSC0120G0000](#) [UAL24VK06450CH](#) [UAL11VL1105000](#) [RN112-3.6-02-0M4](#) [RN114-1.2-02-10M](#) [RN122-0.6-02-47M](#) [RN122-3-02-4M5](#)
[RN142-1-02-33M](#) [RN214-2.5-02-3M3](#) [RN112-2-02-1M0](#) [RN143-6-02-1M8](#) [RN214-0.8-02-27M](#) [RN242-1.4-02-27M](#) [EXC-X4CH120X](#)
[DLW5BTM102TQ2L](#) [CMF16-153131](#) [CMF23H-273141](#) [744252510](#) [B82793C0253N201](#)