


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



- Ordering Information
- 25 43 U-1 XX X W XX S N X 01
- 43=H4.3mm Plastic high
 - No.of Pins Insulator Material Post
 - Per Row 01~40P
 - Option W-with Post
 - A=PT N=w/o post
 - B=PA6 G2:1.5U" Gold
 - C=PA6 G3:2U" Gold
 - D=PA6 G4:3U" Gold
 - E=PA6 G5:5U" Gold
 - F=LCP G6:10U" Gold
 - G7:15U" Gold S0:Gold Flash/Tn
 - SN:Tn
- Packing code stream 01~99
 - O=PE Bag
 - M=Roel+Mylor
 - R=Roel+Cap
 - P=Tube+Cap
 - A=Try
 - T=Tube
 - G2:1.5U" Gold
 - G3:2U" Gold
 - G4:3U" Gold
 - G5:5U" Gold
 - G6:10U" Gold
 - G7:15U" Gold
 - S0:Gold Flash/Tn
 - SN:Tn

深圳市华宇创精密电子有限公司

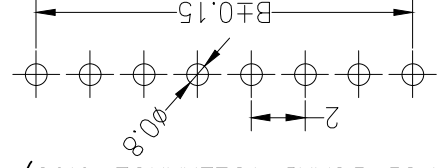

TOLERANCE:
X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.X' ±2
X.X' ±0.5'

SCALE:1:1 SIZE: A4

UNIT: mm [inch]

APPROVED BY: 马跃
DATE: 2014-02-23

CHECKED BY: 陈一鸣
DATE: 2014-02-23

DRAWN BY: 陈一鸣
DATE: 2014-02-23

PART NAME: 2.00X4.3FH 1XNPIN 180°

PART NO.: 2543U-1XXXMXSXXNX01

MOLD NO.:

DRAW NO.: HYC-1812013910

SHEET NO. 1 OF 1

Contacts	Dimensions	
	A	B
21	42.50	40.00
22	44.50	42.00
23	46.50	44.00
24	48.50	46.00
25	50.50	48.00
26	52.50	50.00
27	54.50	52.00
28	56.50	54.00
29	58.50	56.00
30	60.50	58.00
31	62.50	60.00
32	64.50	62.00
33	66.50	64.00
34	68.50	66.00
35	70.50	68.00
36	72.50	70.00
37	74.50	72.00
38	76.50	74.00
39	78.50	76.00
40	80.50	78.00

Dimen Stions List

SPECIFICATIONS
 Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HOAUC](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)