


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

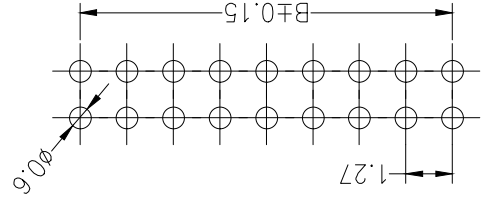

Ordering Information

23 43U-2 XX X N XX S N T 01

- 43=Ht,3mm Plastic high
- 01~50P No. of Pins
- Insulator Material
- Option
- A=PT
- G1:1U" Gold
- G2:1.5U" Gold
- G3:2U" Gold
- G4:3U" Gold
- G5:5U" Gold
- G6:10U" Gold
- G7:15U" Gold
- S0:Gold Flash/Tm
- SN:Tm
- F=LCP
- E=PA9T
- D=PA46
- C=PA6T
- B=PA66
- Insulator Material
- Option
- A=PT
- G1:1U" Gold
- G2:1.5U" Gold
- G3:2U" Gold
- G4:3U" Gold
- G5:5U" Gold
- G6:10U" Gold
- G7:15U" Gold
- S0:Gold Flash/Tm
- SN:Tm
- M=Reel+Mylar
- R=Reel+Cap
- P=Tube+Cap
- T=Tube
- A=Tray
- 0=PC Bag
- Packing code stream 01~99



深圳市华宇创精密电子有限公司

TOLERANCE:	X.X ±0.30	X.X ±0.25	X.X ±0.15
UNIT: mm [inch]			
SCALE:1:1	SIZE: A4		

DRAWN BY:	陈一鸣	DATE:	2014-02-23
CHECKED BY:	马跃	DATE:	2014-02-23
APPROVED BY:		DATE:	2014-02-23

PART NAME:	1.27X4.3FH 2XNP DIP
PART NO.:	Z343U-2XXXXXSN T01
MOLD NO.:	
DRAW NO.:	HYC-1812011003
SHEET NO.:	1 OF 1

Dimensions	Per row	
	A	B
2	34.69	33.02
3	35.96	34.29
4	3.81	37.23
5	6.75	38.50
6	8.02	39.77
7	9.29	41.04
8	10.56	42.31
9	11.83	43.58
10	13.10	44.85
11	14.37	46.12
12	15.64	47.39
13	16.91	48.66
14	18.18	49.93
15	19.45	51.20
16	20.72	52.47
17	21.99	53.74
18	23.26	55.01
19	24.53	56.28
20	25.80	57.55
21	27.07	58.82
22	28.34	60.09
23	29.61	61.36
24	30.88	62.63
25	32.15	63.90
26	33.42	65.17
27	34.69	66.44
28	35.96	67.71
29	37.23	68.98
30	38.50	70.25
31	39.77	71.52
32	41.04	72.79
33	42.31	74.06
34	43.58	75.33
35	44.85	76.60
36	46.12	77.87
37	47.39	79.14
38	48.66	80.41
39	49.93	81.68
40	51.20	82.95
41	52.47	84.22
42	53.74	85.49
43	55.01	86.76
44	56.28	88.03
45	57.55	89.30
46	58.82	90.57
47	60.09	91.84
48	61.36	93.11
49	62.63	94.38
50	63.90	95.65

Dimensions List

SPECIFICATIONS
 Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C
 Contact Material:Phosphor Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HOAUC](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)