


I-T Characteristics / 時間-電流特性

| Ampere Rating 額定電流 | % of Ampere Rating 額定電流% | Opening Time 熔斷時間 |
|-----------------------|-----------------------------|----------------------------------------|
| 250mA-6.3A | 150% | 1 Hrs Min. / 最短1小時 |
| | 210% | 2Min Max. / 最長2分鐘 |
| | 275% | 400ms Min. 10s Max. / 最短400毫秒, 最長10秒 |
| | 400% | 150ms Min. 3s Max. / 最短150毫秒, 最長3秒 |
| | 1000% | 20ms Min. 150ms Max. / 最短20毫秒, 最長150毫秒 |


In accordance with IEC60127-3 standard, sheet 2&4 / 遵循 IEC60127-3, 規格單2&4

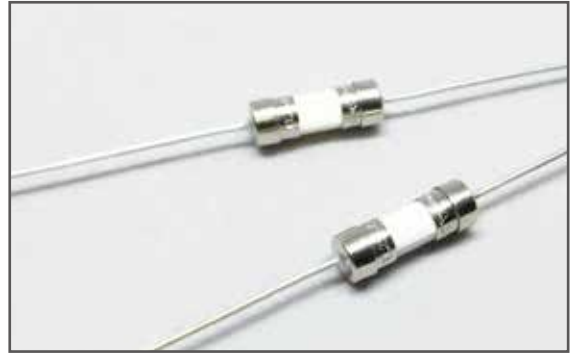

Product Features / 產品特性

| | |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials 材質 | Body / 本體: ceramic tube / 陶瓷管 Lead / 引線: tinned copper wire / 鍍錫銅線 Cap / 銅帽: brass with nickel plated / 銅鍍鎳 Element / 熔絲: alloy / 合金線 |
| Operating Temperature 操作溫度 | -55°C to +125°C (consider de-rating / 需考慮溫度折減) |
| Solderability 可焊性 | 260°C, ≤ 3s. (wave / 波峰焊) 350±10°C, ≤ 3s. (soldering iron / 烙鐵焊) |
| Resistance to Soldering Heat 耐焊接熱 | 260°C, 10s. (wave / 波峰焊) 350°C, 5s. (soldering iron / 烙鐵焊) |
| Recommended Soldering Parameters 建議焊錫參數 | Wave soldering parameter / 波峰焊 Soldering pot temperature / 錫爐溫度: 260°C Max Solder dwell time / 焊接時間: 2~5s |
| | Hand welding parameter / 手工焊 Soldering iron temperature / 烙鐵溫度: 350±5°C Solder dwell time / 焊接時間: 5s Max. |
| Storage Conditions 儲存條件 | Can be stored for 3 years under tight seal condition at temperature of +10°C~60°C, relative humidity ≤ 75%. 在溫度+10°C~60°C, 相對濕度 ≤ 75% 的密閉條件下可存放 3 年。 At most can be kept 30 days at temperature +10°C~60°C, relative humidity ≤ 95% under covered conditions. 在溫度+10°C~60°C, 相對濕度為 95% 的非露天最多可存放 30 天。 |

Dimensions / 尺寸圖 (Unit / 單位:mm)

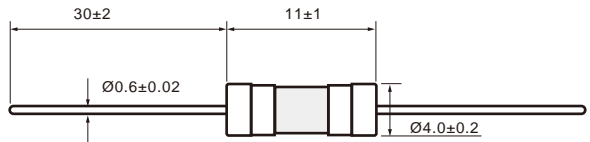

Electrical Characteristics / 電氣特性

| Rated Current 額定電流 | Rated Voltage 額定電壓 | Breaking Capacity 分斷能力 | Safety Approvals 安全認證 | | | | |
|-----------------------|-----------------------|----------------------------|-------------------------|-----|---|----|-----|
| | | | UL US | VDE | S | IC | CQC |
| 250mA | 250V | 250mA~3.15A 35A@250V AC | ● | ● | ● | ● | ● |
| 315mA | 250V | | ● | ● | ● | ● | ● |
| 400mA | 250V | | ● | ● | ● | ● | ● |
| 500mA | 250V | | ● | ● | ● | ● | ● |
| 630mA | 250V | | ● | ● | ● | ● | ● |
| 800mA | 250V | | ● | ● | ● | ● | ● |
| 1.00A | 250V | | ● | ● | ● | ● | ● |
| 1.25A | 250V | | ● | ● | ● | ● | ● |
| 1.60A | 250V | | ● | ● | ● | ● | ● |
| 2.00A | 250V | | ● | ● | ● | ● | ● |
| 2.50A | 250V | | ● | ● | ● | ● | ● |
| 3.15A | 250V | | ● | ● | ● | ● | ● |
| 4.00A | 250V | | 4A~6.3A 10IN@250V AC | ● | ● | ● | ● |
| 5.00A | 250V | ● | | ● | ● | ● | ● |
| 6.30A | 250V | ● | | ● | ● | ● | ● |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [Walter](#) manufacturer:

Other Similar products are found below :

[MBO-20](#) [MDA-V-1/100](#) [12C10X38GI](#) [AGA-V-2-1/2](#) [AGC-V-3-12-R](#) [AGY-50](#) [MSL-3](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#)
[BK1-GMA-200-R](#) [BK1GMA-6-R](#) [BK1/GMC-100-R](#) [BK1/GMC-1.5-R](#) [BK1-GMC-2-5-R](#) [BK1GMD-4-R](#) [BK1S500-250-R](#) [BK1S500-32-R](#)
[BK1-S500-4-R](#) [BK1S500-5-R](#) [BK1-S505-1-R](#) [BK1-S506-2-R](#) [BK1-S506-3-15-R](#) [BK1/S506-63-R](#) [BK/ABC-5RX](#) [BK/AGW-B-4](#) [BK/AVX-](#)
[1/4](#) [BK/C515S-250-R](#) [BK/MBO-20](#) [BK/MBO-8](#) [BK/MDM-3/4](#) [BK-MDQ-4](#) [BK/S505-V-2.5A](#) [BK/TDC120-15](#) [BK/TDC120-20](#)
[BK/TDC122-45](#) [BP/MDL-7](#) [1C10X38AM](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [AGA-V-7-1/2](#) [AGC-15WX](#) [AGC-2-1-2-R](#) [20.0M6.3X32F](#)
[20C8X32GI](#) [GMC-50-R](#) [361.250](#) [MBO-8](#) [TDC121-30](#)