
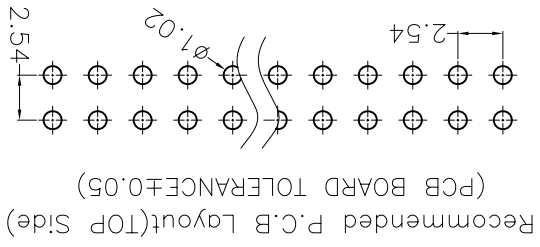
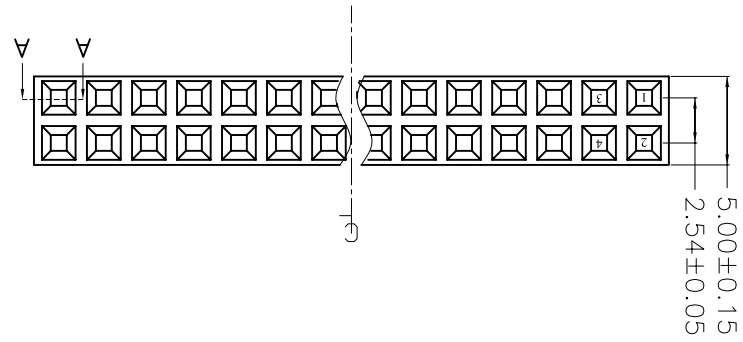



X. ± 0.30	X.° ± 5°	UNITS mm	MATL	FINISH	PART NO.(INTENDED USE)	NAME(INTENDED USE)	MINTRON CO.,LTD.		
							TITLE: MTF185-2XXSY1	DWG NO.:	
X. ± 0.20	X.° ± 2°						APPD: SUNNY		
.XX ± 0.10	.XX° ± 1°						CHKD: LISA		
.XXX ± 0.05	.XXX° ± 0.5°						DR: ZOE 2006-11-28		
							SCALE 1/1	SHEET 1/1	REV. A

Ordering Information

MTF185-2XXSY1

No. of Pins per Row: 02-40PIN

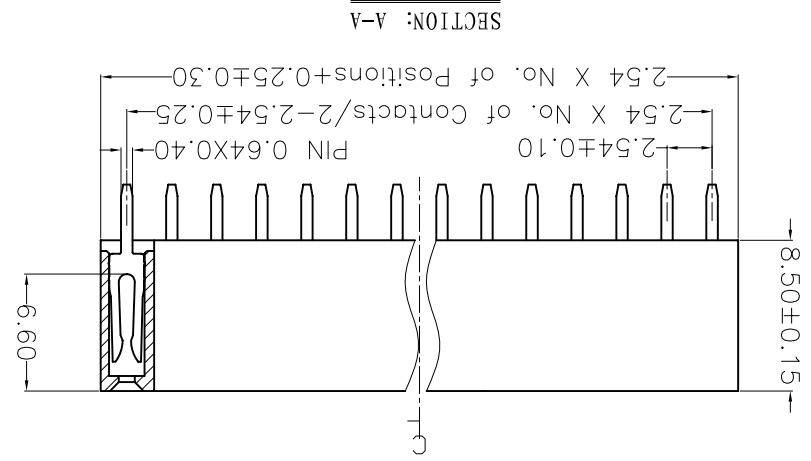

- NOTES:**
- Current Rating: 3.0AMP
 - Withstand Voltage: 500V AC/DC
 - Contact Resistance: 20mΩ Max
 - Insulation Resistance: 1000MΩMin
 - Operation Temperature: -40°C to +105°C
 - Contact Material: Phosphor Bronze or Brass
 - Contact plating: Au or Sn over Ni
 - Insulator Material: PA6T or PBT+30%G. F UL94V-0
 - Contact plated: Gold Flash

REV.	ECN. NO.	APPD.
A		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [MINTRON](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)