



GP
ELECTRONICS

GP2301

20V P-Channel MOSFET

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
-20V	110mΩ@-4.5V	-2.3A
	140mΩ@-2.5V	



Feature

- TrenchFET Power MOSFET
- Excellent $R_{DS(on)}$ and Low Gate Charge

Application

- DC/DC Converter
- Load Switch for Portable Devices
- Battery Switch

MARKING:

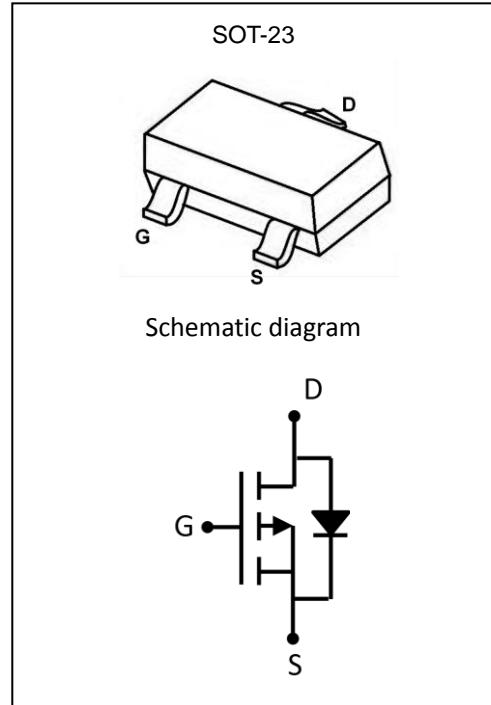

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 8	V
Continuous Drain Current	I_D	-2.3	A
Pulsed Drain Current ($t=300\mu\text{s}$)	I_{DM}	-10	A
Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	357	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~+150	°C

MOSFET ELECTRICAL CHARACTERISTICS($T_a=25^\circ\text{C}$ unless otherwise noted)







Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = -250\mu\text{A}$	-20			V
Zero gate voltage drain current	I_{DSS}	$V_{\text{DS}} = -20\text{V}, V_{\text{GS}} = 0\text{V}$			-1	μA
Gate-body leakage current	I_{GSS}	$V_{\text{GS}} = \pm 8\text{V}, V_{\text{DS}} = 0\text{V}$			± 100	nA
Gate threshold voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = -250\mu\text{A}$	-0.4	-0.7	-1	V
Drain-source on-resistance ^a	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = -4.5\text{V}, I_D = -3\text{A}$		70	110	$\text{m}\Omega$
		$V_{\text{GS}} = -2.5\text{V}, I_D = -2\text{A}$		110	140	
Forward transconductance ^a	g_{FS}	$V_{\text{DS}} = -5\text{V}, I_D = -2\text{A}$	5			S
Dynamic characteristics^b						
Input Capacitance	C_{iss}	$V_{\text{DS}} = -10\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$		405		pF
Output Capacitance	C_{oss}			75		
Reverse Transfer Capacitance	C_{rss}			55		
Gate resistance	R_g	$f = 1\text{MHz}$		6		Ω
Total Gate Charge	Q_g	$V_{\text{DS}} = -10\text{V}, V_{\text{GS}} = -2.5\text{V}, I_D = -3\text{A}$		3.3	12	nC
Gate-Source Charge	Q_{gs}			0.7		
Gate-Drain Charge	Q_{gd}			1.3		
Turn-on delay time	$t_{d(\text{on})}$	$V_{\text{DD}} = -10\text{V}, V_{\text{GEN}} = -4.5\text{V}, I_D = -1\text{A}$ $R_L = 10\Omega, R_{\text{GEN}} = 1\Omega$		11		ns
Turn-on rise time	t_r			35		
Turn-off delay time	$t_{d(\text{off})}$			30		
Turn-off fall time	t_f			10		
Source-Drain Diode characteristics						
Diode forward current	I_s	$T_c = 25^\circ\text{C}$			-2.3	A
Diode pulsed forward current ^a	I_{SM}				-10	A
Diode Forward voltage	V_{DS}	$V_{\text{GS}} = 0\text{V}, I_s = -1.3\text{A}$			-1.2	V


Notes :

a.Pulse Test : Pulse Width < 300 μs , Duty Cycle $\leq 2\%$.

b.Guaranteed by design, not subject to production testing.

Typical Electrical and Thermal Characteristics

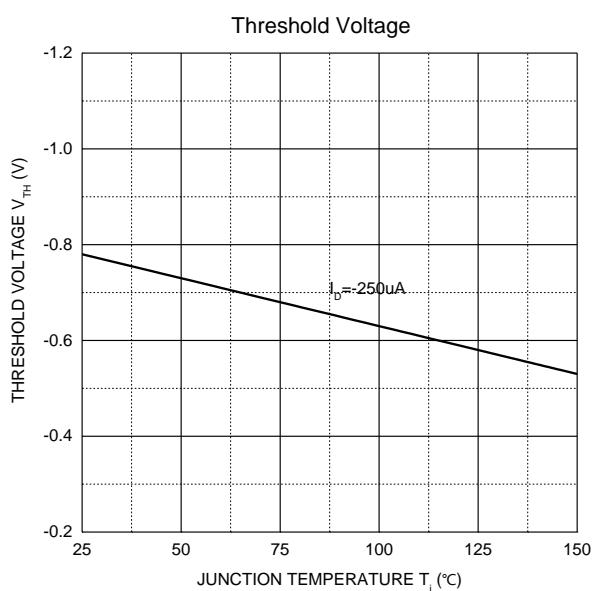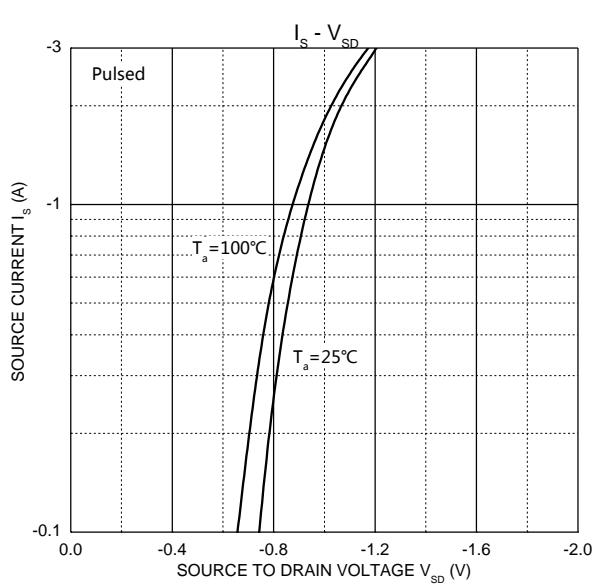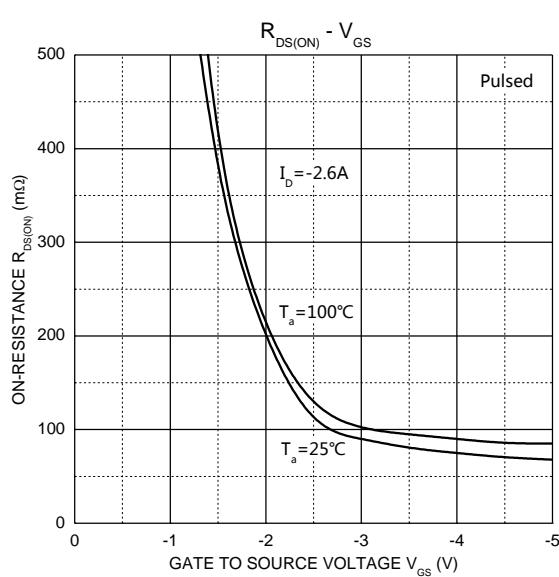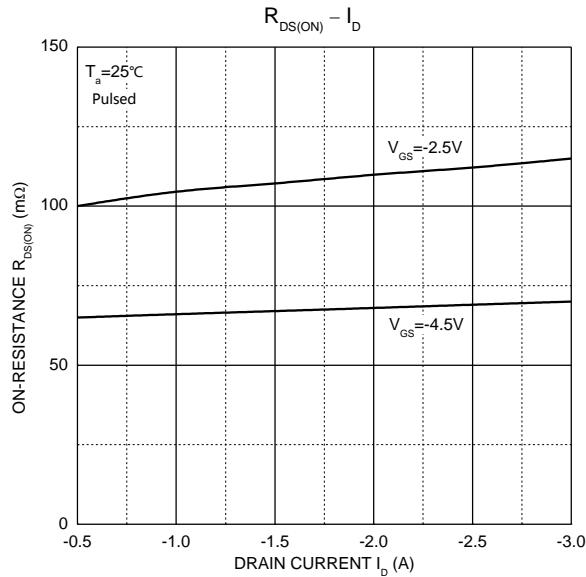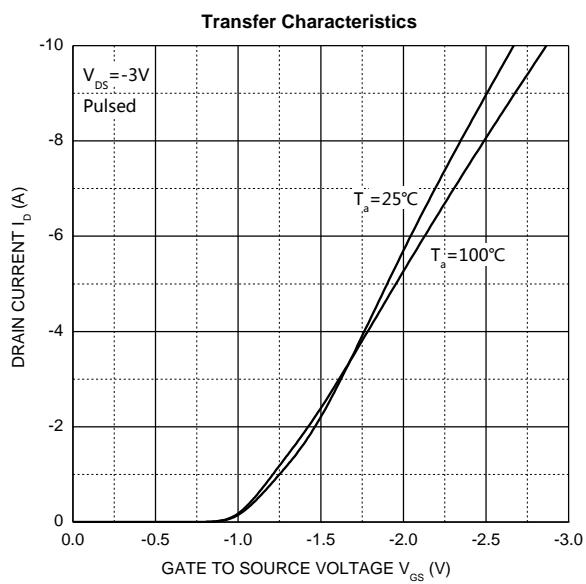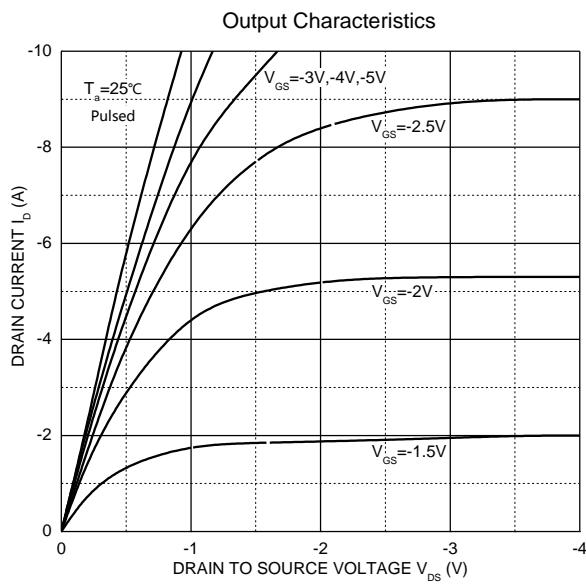


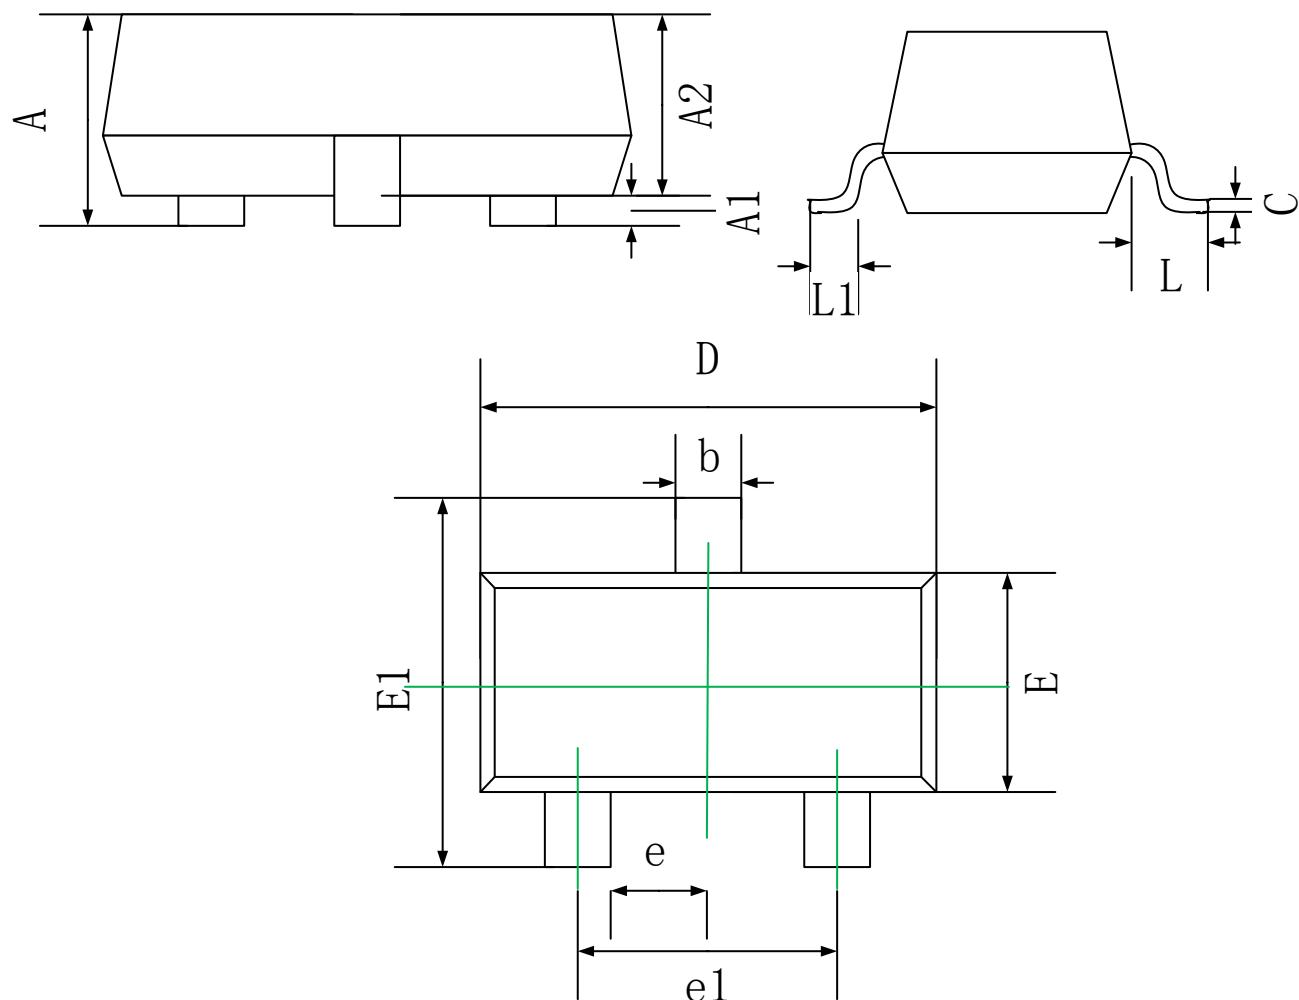SOT-23 Package Information


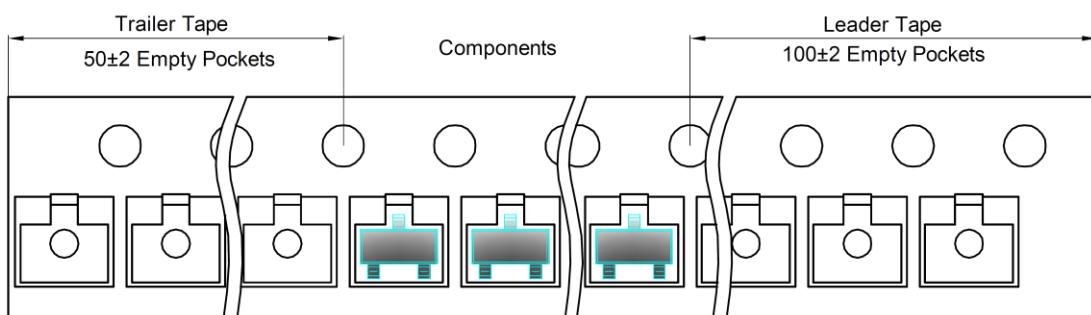
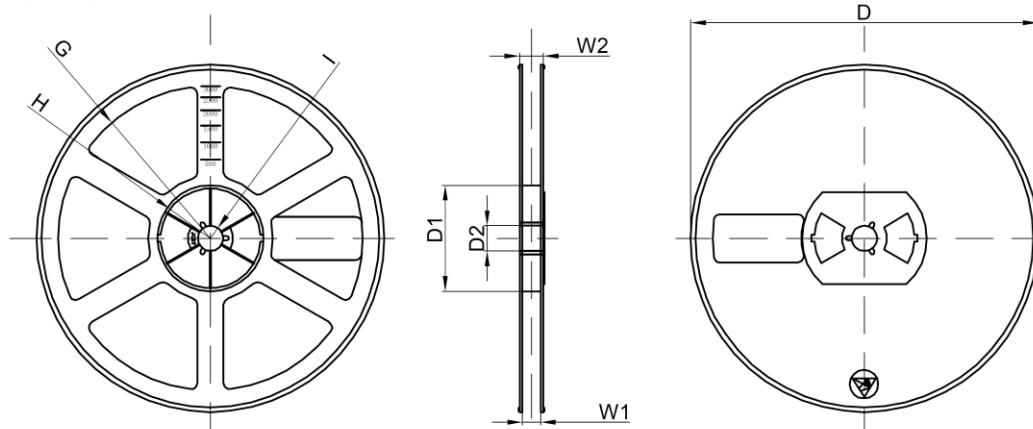
Symbol	Dimensions In Millimeters	
	Min.	Max.
A	0.90	1.15
A1	0.00	0.10
A2	0.90	1.05
b	0.30	0.50
c	0.08	0.15
D	2.80	3.00
E	1.20	1.40
E1	2.25	2.55
e	0.95 REF.	
e1	1.80	2.00
L	0.55 REF.	
L1	0.30	0.50

SOT-23 Tape and Reel
SOT-23 Tape and reel

SOT-23 Embossed Carrier Tape

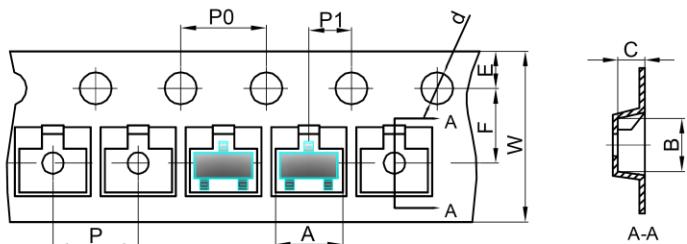

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

SOT-23 Reel


Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by GREEN POWER manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)