



RoHS

MESSRS: \_\_\_\_\_

APPROVAL NO

753 - 001

DATE

2014.08.07

ALUMINUM ELECTROLYTIC

# CAPACITOR

## APPROVAL SHEET

CATALOG TYPE	MV SERIES
USER PART NO.	
适用机种	
特记事项	Halogen-Free

QINGDAO SAMYOUNG ELECTRONICS CO.,LTD

MANAGER OF DEVELOPMENT DEPARTMENT

**GONG JANG SUG**



USER APPROVAL:

APPROVAL NO.: \_\_\_\_\_

SamYoung(Korea) : 47,SAGIMAKGOL-RO,JUNGWON-GU,SEONGNAM-SI,GYEONGGI-DO,KOREA

SamYoung(China) : No.5 CHANGJIANG ROAD,PINGDU-CITY,SHANDONG-PROVINCE,CHINA

样式: H-1001-011

A4 (210×297)




**SamYoung Electronics Co., Ltd.**

**SPECIFICATIONS**

Item	Characteristics																								
Rated Voltage Range	4 ~ 100 V <sub>DC</sub>																								
Operating Temperature Range	- 40 ~ + 85 °C																								
Capacitance Tolerance	±2C ( at 20 °C,120Hz)																								
Leakage Current	I=0.01CV(μA) or 3 μA, whichever is greater(at 20°C,2minutes) Where, I:Max.Leakage current(μA), C :Nominal capacitance ( μF ) V:Rated Voltage (Vdc)																								
Dissipation Factor(TANδ)	Refer to Table 1. (at 120Hz,20°C)																								
Temperature characteristics (Impedance ratio at 120Hz)	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:15%;">Rated Voltage (V<sub>DC</sub>)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35~50</th> <th>63~100</th> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>15</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>4</td> </tr> </table>	Rated Voltage (V <sub>DC</sub> )	4	6.3	10	16	25	35~50	63~100	Z(-25°C)/Z(20°C)	7	4	3	2	2	2	3	Z(-40°C)/Z(20°C)	15	10	8	6	4	3	4
	Rated Voltage (V <sub>DC</sub> )	4	6.3	10	16	25	35~50	63~100																	
	Z(-25°C)/Z(20°C)	7	4	3	2	2	2	3																	
Z(-40°C)/Z(20°C)	15	10	8	6	4	3	4																		
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C.(where,1,000 hours for 3Φ) Capacitance change : ≤± 20% of the initial Value TANδ : ≤200% of the initial specified value Leakage current : ≤The initial specified value																								
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 85°C for 500 hours without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,at least 24 hours and not more than 48 hours before the measurements. Capacitance change : ≤± 15% of the initial Value (Where,±20% for 3Φ) TANδ : ≤150% of the initial specified value (Where,200% for 3Φ) Leakage current : ≤The initial specified value																								
Others	Satisfies characteristic <b>KS C IEC 60384-4</b>																								

**Table: RATINGS OF MV Series**

V <sub>DC</sub> Item μF	4(OG)		6.3(OJ)		10(1A)		16(1C)		25(1E)		35(1V)		50(1H)		63(1J)		100(2A)					
	CASE CODE	TANδ	CASE CODE	TANδ	CASE CODE	TANδ	CASE CODE	TANδ	CASE CODE	TANδ	CASE CODE	TANδ	CASE CODE	TANδ	CASE CODE	TANδ	CASE CODE	TANδ				
0.1														B55	D55	0.12	0.11	D55	0.12			
0.15														B55	D55	0.12	0.11	D55	0.12			
0.22														B55	D55	0.12	0.11	D55	0.12			
0.33														B55	D55	0.12	0.11	D55	0.12			
0.47														B55	D55	0.12	0.11	D55	0.12			
0.68														B55	D55	0.12	0.11	D55	0.12			
1														B55	D55	0.13	0.11	D55	0.12			
1.5														B55	D55	0.13	0.11	D55	0.12			
2.2											B55	D55	0.15	B55	D55	0.13	0.11	D55	0.12			
3.3											B55	D55	0.14	D55	0.11	E55	0.12					
4.7							D55	0.22	B55	D55	0.16	D55	0.13	E55	0.11	E55	0.12					
6.8							B55	D55	0.24	0.22	D55	0.15	E55	0.13	F55	0.11	F55	0.12				
10						B55	D55	0.28	B55	D55	0.24	0.22	E55	0.15	E55	0.13	F55	0.11	F60	0.12		
15						D55	0.26	E55	0.20	F55	0.15	F55	0.13	F60	0.12	F60	0.12					
22	B55	D55	0.46	B55	D55	0.41	0.32	E55	0.28	E55	0.20	F55	0.15	F55	0.13	F60	0.12	F60	0.12	H10	0.12	
33	D55	0.46	E55	0.27	E55	0.26	F55	0.21	F55	0.15	F60	0.14	H63	F80	0.12	H10	0.12	J10	0.12			
47	D55	0.60	E55	0.35	F55	0.23	F55	0.21	F60	0.16	H63	F80	0.14	H10	0.12	H10	0.12					
68	E55	0.42	F55	0.38	F55	0.29	F60	0.23	H63	F80	0.16	H10	0.14	J10	0.12	J10	0.12					
100	E55	0.62	F55	0.40	F60	0.23	H63	F55	0.26	H63	F80	0.16	H10	0.14	J10	0.12						
220	F55	0.72	F60	H63	0.40	H63	F80	0.30	H10	F80	0.26	J10	0.16	J10	0.14							
330			H63	F80	0.40	H10	0.30	H10	0.26													
470			H10	0.40	J10	0.30	J10	0.26														
1000			J10	0.40																		

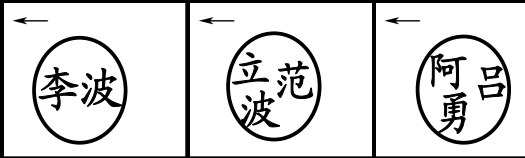


# ALUMINUM ELECTROLYTIC CAPACITOR


APPROVAL NO.  
753 - 001

## DIMENSIONS OF MV Series

### Dimensions

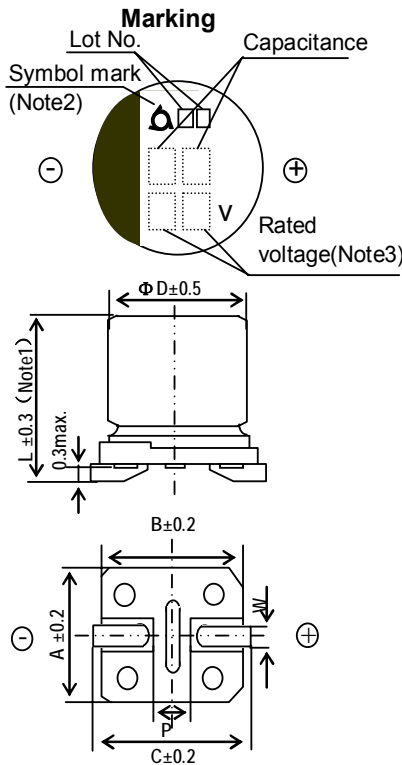

### Recommended solder land on PC board



Solder land on PC board

- Note1: L±0.5 for 8×6.3(H63), 8×10(H10), 10×10(J10)
- Note2: 3×5.2(B55), 4×5.2(D55) is excluded symbol mark.
- Note3: 6.3WV is marked by 6V.

Case code	ΦD	L	A	B	C	W	P	a	b	c
B55	Φ3	5.2	3.3	3.3	3.7	0.45-0.75	0.8	0.8	2.2	1.6
D55	Φ4	5.2	4.3	4.3	5.1	0.5-0.8	1.0	1.0	2.6	1.6
E55	Φ5	5.2	5.3	5.3	5.9	0.5-0.8	1.4	1.4	3	1.6
F55	Φ6.3	5.2	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6
F60	Φ6.3	5.7	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6
F80	Φ6.3	7.7	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6
H63	Φ8	6.3	8.3	8.3	9.0	0.5-0.8	2.3	2.3	4.5	1.6
H10	Φ8	10	8.3	8.3	9.0	0.7-1.1	3.1	3.1	4.2	2.2
J10	Φ10	10	10.3	10.3	11.0	0.7-1.1	4.5	4.5	4.4	2.2

## RATINGS OF MV Series


V <sub>DC</sub> Item μF	4(OG)		6.3(OJ)		10(1A)		16(1C)		25(1E)		35(1V)		50(1H)		63(1J)		100(2A)					
	CASE CODE	Ripple current	CASE CODE	Ripple current	CASE CODE	Ripple current	CASE CODE	Ripple current	CASE CODE	Ripple current	CASE CODE	Ripple current	CASE CODE	Ripple current	CASE CODE	Ripple current	CASE CODE	Ripple current				
0.1													B55	D55	1.1	1.3	D55	1.3				
0.15														B55	D55	2.0	2.0	D55	2.5			
0.22														B55	D55	2.0	2.9	D55	3.0			
0.33														B55	D55	3.0	3.5	D55	4.0			
0.47														B55	D55	3.8	4.2	D55	5.0			
0.68														B55	D55	4.6	5.1	D55	6.0			
1														B55	D55	5.6	6.2	D55	8.0			
1.5														B55	D55	6.9	7.5	D55	9.5			
2.2											B55	D55	7.7	B55	D55	8.3	10	D55	12			
3.3											B55	D55	9.4	D55		14	E55	17				
4.7							D55	10	B55	D55	10.5	D55	15	E55	19	E55	20					
6.8							B55	D55	11.6	D55	16	E55	20	F55	24	F55	25					
10						B55	D55	12.8	B55	D55	14	17	E55	25	E55	25	F55	29	F60	32		
15						D55	20	E55	26	F55	33	F55	33	F60	32	F60	40					
22	B55	D55	14	B55	D55	23	E55	32	E55	32	F55	40	F55	40	F60	45	F80	60	H10	90		
33	D55	23	E55	35	E55	35	F55	45	F55	45	F60	55	H63	F80	95	H10	110	J10	120			
47	D55	27	E55	38	F55	50	F55	50	F60	65	H63	F80	105	H10	140	H10	130					
68	E55	38	F55	54	F55	54	F60	78	H63	F80	115	H10	157	J10	170	J10	170					
100	E55	46	F55	60	F60	70	F55	H63	74	175	H63	F80	145	H10	175	J10	195					
220														H10	215							
	F55	74	F60	H63	80	175	H63	F80	175	H10	F80	215	130	J10	265							
330			H63	F80	190	H10	270	H10	270													
470			H10	265	J10	330	J10	330														
1000			J10	400																		

# ALUMINUM ELECTROLYTIC CAPACITOR


**APPROVAL NO.**  
**753 - 001**

## TAPING DIMENSIONS


**FIG.1**

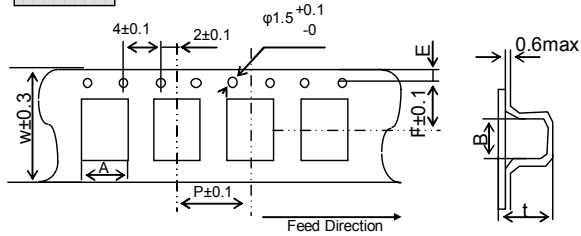


**FIG.2**

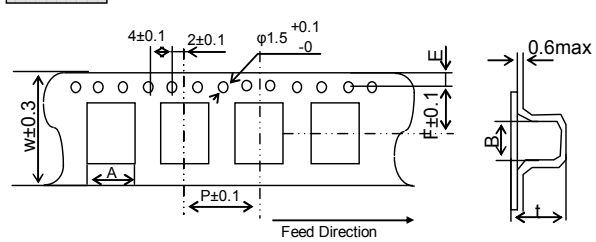

**FIG.3**

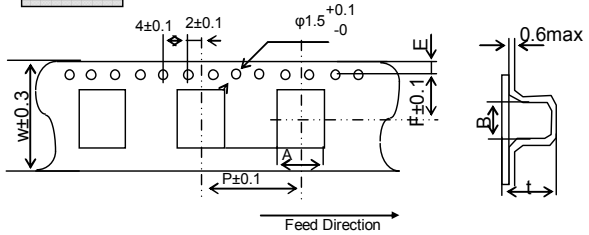


**FIG.4**

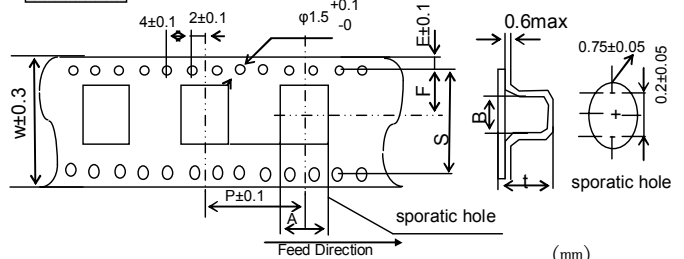

Case code	Fig	W	A	B	F	E	P	t	S
φ3 (B55)	1	12	3.5±0.2	3.5±0.2	5.5	1.75±0.1	8	5.9±0.2	—
φ4 (D55, D56, D60)	1	12	4.7±0.2	4.7±0.2	5.5	1.75±0.1	8	5.7±0.2 (D55, D56)	—
φ5 (E55, E56, E60)	2	12	5.7±0.2	5.7±0.2	5.5	1.75±0.1	12	5.7±0.2 (E55, E56)	—
φ6.3 (F55, F56, F60)	2	16	7.0±0.2	7.0±0.2	7.5	1.75±0.1	12	5.7±0.3 (F55, F56)	—
φ6.3×8L (F80)	2	16	7.0±0.2	7.0±0.2	7.5	1.75±0.1	12	8.2±0.2	—
φ8×6L (H63)	2	16	8.7±0.2	8.7±0.2	7.5	1.75±0.1	12	6.8±0.2	—
φ8×6.7L (H70)	2	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	12	7.3±0.2	—
φ8×10L (H10)	3	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	16	11.0±0.2	—
φ8×11.5L (H12)	3	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	16	12.3±0.2	—
φ10×10L (J10)	3	24	10.7±0.2	10.7±0.2	11.5	1.75±0.1	16	11.0±0.2	—
φ10×12.2L (J12)	3	24	10.7±0.2	10.7±0.2	11.5	1.75±0.1	16	13.0±0.2	—
φ12.5×13.5L (K14)	4	32	13.4±0.2	13.4±0.2	14.5	1.75±0.1	24	14.0±0.2	28.4±0.1


## REEL

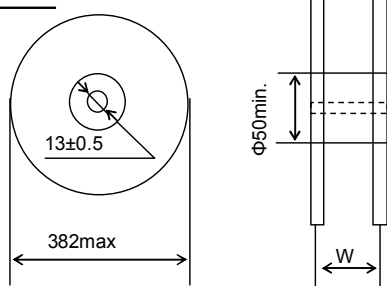

## QUANTITY PER REEL

Case code	W (mm)	Qty (pcs/reel)	Qty (pcs/box)
φ3 (B55)	14	2,000	20,000
φ4 (D55, D56, D60)	14	2,000	20,000
φ5 (E55, E56, E60)	14	1,000	10,000
φ6.3 (F55, F56, F60)	18	1,000	10,000
φ6.3×8L (F80)	18	900	9,000
φ8×6L (H63)	18	1,000	10,000
φ8×6.7L (H70)	26	1,000	6,000
φ8×10L (H10)	26	500	3,000
φ8×11.5L (H12)	26	400	2,400
φ10×10L (J10)	26	500	3,000
φ10×12.2L (J12)	26	400	2,400
φ12.5×13.5L (K14)	34	200	1,000

## ORIENTATION OF POLARITY

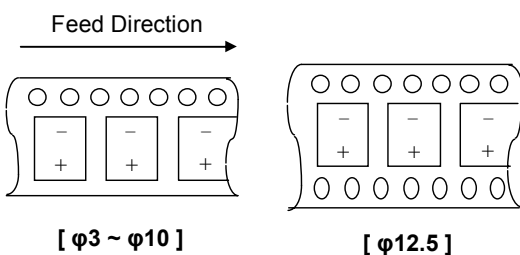

**ALUMINUM ELECTROLYTIC CAPACITOR****APPROVAL NO:**  
**753 - 001****CE32 TYPE****MINIATURE SIZED TYPE CAPACITORS COMPONENT**

<b>PART NAME</b>	<b>MATERIALS</b>	<b>VENDER</b>
<b>LEAD WIRE</b>	<b>TINNED COPPER - PLY WIRE(PB-FREE)</b>	KISTRON (KOREA/CHINA) KOHOKU (JAPAN/CHINA) NANTONG HONGYANG (CHINA)
<b>AL LEAD</b>	<b>ALUMINUM 99.92%</b>	KISTRON (KOREA/CHINA) KOHOKU (JAPAN/CHINA) NANTONG HUIFENG (CHINA)
<b>PACKING PAD</b>	<b>SYNTHETIC RUBBER</b>	SUNG NAM (KOREA/CHINA) CCW (CHINA)
<b>CHIP BASE</b>	<b>PPA ( POLY PHTHAL AMIDE )</b>	BASE (KOREA) ZICVISION (JAPAN) SANKYO TOHOKU (JAPAN) VIVID (CHINA)
<b>AL CASE</b>	<b>COATED ALUMINUM</b>	D.N TECH/HA NAM (KOREA) LINAN AOXING (CHINA)
<b>AL FOIL (+)</b>	<b>FORMED ALUMINUM 99.9% OVER</b>	SAM YOUNG (KOREA) K.D.K/JCC/MATSUSHITA (JAPAN) BECROMAL (ITALY) HEC/HISTAR (CHINA)
<b>AL FOIL (-)</b>	<b>ETCHED ALUMINUM 98% OVER</b>	K.D.K (JAPAN) K-JCC (KOREA) ELECON/WU JIANG FEILO (CHINA)
<b>SEPARATOR</b>	<b>INSULATION PAPER</b>	N.K.K (JAPAN) KAN (CHINA)
<b>ADHESIVE TAPE</b>	<b>POLYPHENYLENE SULFIDE OR POLY IMIDE FILM</b>	DAEIL/SWECO (KOREA) NITTO/NICHIBAN (JAPAN)

**PRECAUTIONS TO USERS****Soldering method**

The capacitors of Al chip have no capability to withstand such dip or wave soldering as totally immerses components into a solder bath.

**Reflow soldering**

Use the capacitors within the Recommended Reflow Soldering Conditions, and also make sure to check the temperature stress to the capacitors because the following makes a difference in the stress to the capacitors. If any other reflow soldering conditions are applied, please consult us.

- (1) Location of components. (The edge sides of a PC board increases its temperature more than the center does.)
- (2) Population of components. The less the component population is the more the temperature is increased.
- (3) Material of printed circuit board. As a ceramic board needs heating up more than a glass epoxy board to reach the same board temperature, the capacitors may be damaged.
- (4) Thickness of PC board. A thick PC board needs heating up more than a thin board. It may damage the capacitors.
- (5) Size of PC board. A large PC board needs heating up more than a small board and it may damage the capacitors.
- (6) Location of infrared ray lamps. On IR reflow as well as hot plate reflow, heating only the reverse side of the PC board will reduce stress to the capacitors.

**Rework of soldering**

Avoid soldering more than once by reflow. Use a soldering iron

for rework of solder, and do not exceed an iron tip temperature of 300°C and a max. exposure time of 5 seconds.

**Mechanical stress**

Do not lift up or push the capacitor after soldering. Avoid curvature of the PC board. These may damage the capacitor.

**Cleaning of Assembly board**

Standard aluminum electrolytic capacitors should be free from solvent during PC board cleaning after soldering. Use solvent-proof capacitors and follow the cleaning condition when halogenated solvents are used.

After solvent cleaning, immediately evaporate the solvents residue for at least 10 minutes with a hot forced air. If the assembly board is inadequately dried after a washing process, the capacitors will keep suffering from the residual solvent for long periods of time, and will be corroded while in service.

**Coating on assembly board**

- (1) Before coating, evaporate cleaning solvents from the assembly board.
- (2) Before the conformal coating, using a buffer precoat which does not contain chloride is recommended to reduce stress to the capacitors.

**Molding by resin**

Inner pressure of a capacitor slowly increases over the service life of the capacitor with gas being produced by internal chemical reaction. If the end seal of the capacitor is completely be in danger. Also if the resin contains a large amount of chlorine ion, it will penetrate into the end seal, get into the inside element of the capacitor, and damage the capacitor while in service.

**Others**

Pls refer to Page 5 of 6 and 6 of 6.



## When using aluminum electrolytic capacitors, pay strict attention to the following:

### 1. Electrolytic capacitors for DC application require polarization.

Confirm the polarity. If used in reversed polarity, the circuit life may be shortened or the capacitor may be damaged. For use on circuits whose polarity is occasionally reversed, or whose polarity is unknown, use bi-polarized capacitors (BP-series). Also, note that the electrolytic capacitor cannot be used for AC application.

### 2. Do not apply a voltage exceeding the capacitor's voltage rating.

If a voltage exceeding the capacitor's voltage rating is applied, the capacitor may be damaged as leakage current increases. When using the capacitor with AC voltage superimposed on DC voltage, care must be exercised that the peak value of AC voltage does not exceed the rated voltage.

### 3. Do not allow excessive ripple current to pass.

Use the electrolytic capacitor at current values within the permissible ripple range. If the ripple current exceeds the specified value, request capacitors for high ripple current applications.

### 4. Ascertain the operating temperature range.

Use the electrolytic capacitors according to the specified operating temperature range. Usage at room temperature will ensure longer life.

### 5. The electrolytic capacitor is not suitable for circuits in which charge and discharge are frequently repeated.

If used in circuits in which charge and discharge are frequently repeated, the capacitance value may drop, or the capacitor may be damaged. Please consult our engineering department for assistance in these applications.

### 6. Apply voltage treatment to the electrolytic capacitor which has been allowed to stand for a long time.

If the electrolytic capacitor is allowed to stand for a long time, its withstand voltage is liable to drop, resulting in increased leakage current. If the rated voltage is applied to such a product, a large leakage current occurs and this generates internal heat, which damaged the capacitor. If the electrolytic capacitor is allowed to stand for a long time, therefore, use it after giving voltage treatment (Note 1). (However, no voltage treatment is required if the electrolytic capacitor is allowed to stand for less than 2 or 3 years at normal temperature.)

### 7. Be careful of temperature and time when soldering.

When soldering a printed circuit board with various components, care must be taken that the soldering temperature is not too high and that the dipping time is not too long. Otherwise, there will be adverse effects on the electrical characteristics and insulation sleeve of electrolytic capacitors in the case of small-sized electrolytic capacitors, nothing abnormal will occur if dipping is performed at less than 260°C for less than 10 seconds.

### 8. Do not place a soldering iron on the body of the capacitor.

The electrolytic capacitor is covered with a vinyl sleeve. If the soldering iron comes in contact with the electrolytic capacitor body during wiring, damage to the vinyl sleeve and/or case may result in defective insulation, or improper protection of the capacitor element.

### 9. Cleaning circuit boards after soldering.

Some solvents have adverse effects on capacitors.  
Please refer to the next page.

### 10. Do not apply excessive force to the lead wires or terminals.

If excessive force is applied to the lead wires and terminals, they may be broken or their connections with the internal elements may be affected. (For strength of terminals, refer to KS C IEC 60384-4 (JIS C5101-1, JIS C5101-4))

### 11. Care should be used in selecting a storage area.

If electrolytic capacitors are exposed to high temperatures caused by such things as direct sunlight, the life of the capacitor may be adversely affected. Storage in a high humidity atmosphere may affect the solderability of lead wires and terminals.

### 12. Surge voltage.

The surge voltage rating is the maximum DC over-voltage to which the capacitor may be subjected for short periods not exceeding approximately 30 seconds at infrequent intervals of not more than six minutes. According to KS C IEC 60384-4, the test shall be conducted 1000 cycles at room temperature for the capacitors of characteristic KS C IEC 60384-4 or at the maximum operating temperature for the capacitors of characteristics B and C of KS C IEC 60384-4 with voltage applied through a series resistance of 1000 ohms without discharge. The electrical characteristics of the capacitor after the test are specified in KS C IEC 60384-4. Unless otherwise specified, the rated surge voltage are as follows:

Rated Voltage(V)	2	4	6.3	10	16	25	35	50	63	80	100	160	200	250	315	350	400	450	500
Rated Surge Voltage(V)	2.5	5	8	13	20	32	44	63	79	100	125	200	250	300	365	400	450	500	550

**Note 1 Voltage treatment** ... Voltage treatment shall be performed by increasing voltage up to the capacitor's voltage rating gradually while lowering the leakage current. In this case, the impressed voltage shall be in the range where the leakage current of the electrolytic capacitor is less than specified value. Meanwhile, the voltage treatment time may be effectively shortened if the ambient temperature is increased (within the operating temperature range).

**Note 2 For methods of testing**, refer to KS C IEC 60384-4, (JIS C 5101-1, JIS C 5101-4)



## CLEANING CONDITIONS

Aluminum electrolytic capacitors that have been exposed to halogenated hydrocarbon cleaning and defluxing solvents are susceptible to attack by these solvents. This exposure can result in solvent penetration into the capacitors, leading to internal corrosion and potential failure.

Common type of halogenated cleaning agents are listed below.

Chemical Name	Structural Formula	Representative Brand Name
Trichlorotrifluoroethane	C <sub>2</sub> Cl <sub>3</sub> F <sub>3</sub>	Freon TF, Daiflon S-3
Fluorotrichloromethane	CCl <sub>3</sub> F	Freon-11, Daiflon S-1
1,1,1-Trichloroethane	F <sub>2</sub> H <sub>3</sub> Cl <sub>3</sub>	Chloroethane
Trichloroethylene	C <sub>2</sub> HCl <sub>3</sub>	Trichlene
Methyl Chloride	CH <sub>3</sub> Cl	MC

We would like to recommend you the below cleaning materials for your stable cleaning condition taking the place of previous materials.

◎ Isopropyl Alcohol (IPA) or Water

Cleaning method: One of immersion, ultrasonic or vapor cleaning.

Maximum cleaning time: 5 minutes (Chip type: 2 minutes)

※ Do not use AK225AES

Aluminum electrolytic capacitors are easily affected by halogen ions, particularly by chloride ions. Excessive amounts of halogen ions, if happened to enter the inside of the capacitors, will give corrosion accidents-rapid capacitance drop and vent open. The extent of corrosion accidents varies with kinds of electrolytes and seal-materials. Therefore, the prevention of halogen ion contamination is the most important check point for quality control in our production lines. At present, halogenated hydrocarbon-contained organic solvents such as Trichloroethylene, 1,1,1-Trichloroethane, and Freon are used to remove flux from circuit boards.


If electrolytic capacitors are cleaned with such solvents, they may gradually penetrate the seal portion and cause the ejection. When using latex-based adhesive on the capacitors rubber end seal for adhesion to a PCB, corrosion may occur depending on the kind of solvent in the adhesive. Select an adhesive as an organic solvent with dissolved polymer that is not halogenated hydrocarbon. Hot air drying is required for eliminating the solvent between the product and the PCB at 50°C~80°C after coating.

Followings are the penetration path of the halogenated solvent.


- ① Penetration between the rubber and the aluminum case
- ② Penetration between the rubber and the lead wire
- ③ Penetration through the rubber

The inside of the capacitors, the mechanism of corrosion of aluminum electrolytic capacitors by halogen ions can be explained as follows:

Halides (RX) are absorbed and diffused into the seal portion. The halides then enter the inside of the capacitors and contact with the electrolyte of the capacitors. Where by halogen ions are made free by a hydrolysis with water in the electrolyte:



The halogen ions (X<sup>-</sup>) react with the dielectric substance (Al<sub>2</sub>O<sub>3</sub>) of aluminum electrolytic capacitors:



ALX<sub>3</sub> is dissociated with water:



### ※ MANUFACTURING SITE

- SamYoung Electronics Co., Ltd. (Korea/China)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):*

*Click to view products by [SamYoung manufacturer](#):*

Other Similar products are found below :

[GA0402A270FXBAC31G](#) [RVB-50V330MG10UQ-R](#) [RVJ-50V101MH10U-R](#) [RVZ-35V151MH10U-R2](#) [RC0J226M04005VR](#)  
[RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1C226M05005VR](#) [RC1C476M6L005VR](#) [RC1E107M6L07KVR](#) [RC1E336M6L005VR](#)  
[RC1H106M6L005VR](#) [RC1H475M05005VR](#) [RC1V227M10010VR](#) [RC1V476M6L006VR](#) [50SEV1M4X5.5](#) [TYEH1A336E55MTR](#)  
[TYEH1H106F55MTR](#) [TYEH1V106E55MTR](#) [35SEV47M6.3X8](#) [35SGV220M10X10.5](#) [VES2R2M1HTR-0405](#) [VZH102M1ATR-1010](#)  
[50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#) [SC1C476M05005VR](#) [SC1E107M0806BVR](#) [SC1E227M08010VR](#) [SC1H106M05005VR](#)  
[SC1H106M6L005VR](#) [SC1H227M10010VR](#) [SC1H335M04005VR](#) [CE4.7/50-SMD](#) [VEJ4R7M1VTR-0406](#) [VZH331M1ETR-0810](#)  
[VES101M1CTR-0605](#) [TYEH1H475E55MTR](#) [6.3SEV22M4X5.5](#) [6.3SEV47M4X5.5](#) [EEEFK1H151GP](#) [EEEFK1A681GP](#) [EEE0GA471XP](#)  
[EEEFK1V151GP](#) [RC1V107M6L07KVR](#) [VZH101M1VTR-0810](#) [VE010M1HTR-0405](#) [GYA1V151MCQ1GS](#) [EEH-ZC1J680P](#) [EEH-](#)  
[ZK1V181P](#) [GYA1V271MCQ1GS](#)