
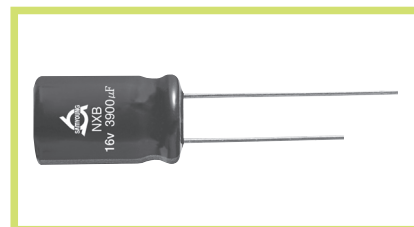


## NXB Series

• 105°C 2,000~5,000Hrs assured.

- Non-solvent proof.
- Very Low Impedance.
- For SMPS, IP-Board, Adaptor, Noise Filter, Charger.
- RoHS compliant.
- Halogen-free capacitors are also available.

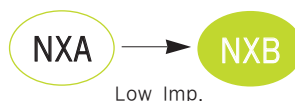

## SPECIFICATIONS

| Item   | Characteristics  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
|--|--|---------------------------------|-----------|------------------|-------------|------|-------------|------|-------------|---------|-------------|-----------|------|------|------|------|------|------|------|------|------|
| Rated Voltage Range                                | 6.3 ~ 120 V <sub>DC</sub>  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Operating Temperature Range                        | -40 ~ +105°C   |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Capacitance Tolerance                              | ±20%(M) (at 20°C, 120Hz)   |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Leakage Current                                    | I = 0.01CV(μA) or 3μA, whichever is greater.<br>Where, I:Max. Leakage current(μA), C:Nominal capacitance(μF), V:Rated voltage(V <sub>DC</sub> )<br>(at 20°C, 2 minutes)  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Dissipation Factor(Tanδ)                           | <table border="1"> <tr> <td>Rated voltage(V<sub>DC</sub>)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>120</td> </tr> <tr> <td>Tanδ(Max)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.08</td> </tr> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase. (at 20°C, 120Hz)</p>   | Rated voltage(V <sub>DC</sub> ) | 6.3       | 10               | 16          | 25   | 35          | 50   | 63          | 100     | 120         | Tanδ(Max) | 0.22 | 0.19 | 0.16 | 0.14 | 0.12 | 0.10 | 0.09 | 0.08 | 0.08 |
| Rated voltage(V <sub>DC</sub> )                    | 6.3  | 10                              | 16        | 25               | 35          | 50   | 63          | 100  | 120         |         |             |           |      |      |      |      |      |      |      |      |      |
| Tanδ(Max)  | 0.22   | 0.19                            | 0.16      | 0.14             | 0.12        | 0.10 | 0.09        | 0.08 | 0.08        |         |             |           |      |      |      |      |      |      |      |      |      |
| Temperature Characteristics (Max. Impedance ratio) | <table border="1"> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>3</td> </tr> </table> <p>(at 120Hz)</p>  | Z(-25°C)/Z(20°C)                | 2         | Z(-40°C)/Z(20°C) | 3           |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Z(-25°C)/Z(20°C)                                   | 2  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Z(-40°C)/Z(20°C)                                   | 3  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Load Life  | <p>The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) at 105°C for the specified period of time.</p> <table border="1"> <tr> <th>Case Size(∅D)</th> <th>Life Time</th> </tr> <tr> <td>∅5, 6.3</td> <td>2,000 hours</td> </tr> <tr> <td>∅8</td> <td>3,000 hours</td> </tr> <tr> <td>∅10</td> <td>4,000 hours</td> </tr> <tr> <td>∅12.5 ~</td> <td>5,000 hours</td> </tr> </table> <p>Capacitance change ≤ ±25% of the initial value<br/>Tanδ ≤ 200% of the initial specified value<br/>Leakage current ≤ The initial specified value</p> | Case Size(∅D)                   | Life Time | ∅5, 6.3          | 2,000 hours | ∅8   | 3,000 hours | ∅10  | 4,000 hours | ∅12.5 ~ | 5,000 hours |           |      |      |      |      |      |      |      |      |      |
| Case Size(∅D)                                      | Life Time  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| ∅5, 6.3  | 2,000 hours  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| ∅8   | 3,000 hours  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| ∅10  | 4,000 hours  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| ∅12.5 ~  | 5,000 hours  |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Shelf Life   | <p>The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.</p> <p>Capacitance change ≤ ±25% of the initial value<br/>Tanδ ≤ 200% of the initial specified value<br/>Leakage current ≤ The initial specified value</p>   |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |
| Others   | Satisfied characteristics KS C IEC 60384-4   |                                 |           |                  |             |      |             |      |             |         |             |           |      |      |      |      |      |      |      |      |      |

## DIMENSIONS OF NXB Series

Unit(mm)

Marking : DARK BROWN SLEEVE, SILVER INK

|     |               |     |     |              |      |     |     |
|-----|---------------|-----|-----|--------------|------|-----|-----|
| ∅D  | 5             | 6.3 | 8   | 10           | 12.5 | 16  | 18  |
| ∅d  | 0.5           | 0.5 | 0.6 | 0.6          | 0.6  | 0.8 | 0.8 |
| F   | 2.0           | 2.5 | 3.5 | 5.0          | 5.0  | 7.5 | 7.5 |
| ∅D' | ∅D + 0.5 max. |     |     |              |      |     |     |
| L'  | L + 1.5 max.  |     |     | L + 2.0 max. |      |     |     |

※ ∅10 x 12L, L' ≤ L + 1.5

## RATINGS OF NXB Series


| V <sub>DC</sub><br>∅D×L(mm) | 6.3   |       |       |        | 10    |       |       |        | 16    |       |       |        |
|-----------------------------|-------|-------|-------|--------|-------|-------|-------|--------|-------|-------|-------|--------|
|                             | μF    | IMP.  |       | Ripple | μF    | IMP.  |       | Ripple | μF    | IMP.  |       | Ripple |
|                             |       | 20°C  | -10°C |        |       | 20°C  | -10°C |        |       | 20°C  | -10°C |        |
| 5 × 11                      | 220   | 0.30  | 1.0   | 250    | 150   | 0.30  | 1.00  | 250    | 100   | 0.30  | 1.0   | 250    |
| 6.3 × 11                    | 470   | 0.13  | 0.41  | 405    | 330   | 0.13  | 0.41  | 405    | 100   | 0.15  | 0.41  | 385    |
|                             |       |       |       |        |       |       |       |        | 220   | 0.13  | 0.36  | 405    |
| 6.3 × 15                    | 560   | 0.10  | 0.32  | 646    | 470   | 0.10  | 0.32  | 646    | 330   | 0.10  | 0.32  | 646    |
| 8 × 11.5                    | 820   | 0.072 | 0.22  | 760    | 330   | 0.094 | 0.28  | 600    | 470   | 0.072 | 0.22  | 760    |
|                             |       |       |       |        | 680   | 0.072 | 0.22  | 760    |       |       |       |        |
| 8 × 15                      | 1,200 | 0.060 | 0.18  | 818    | 1,000 | 0.060 | 0.18  | 818    | 680   | 0.060 | 0.18  | 818    |
| 8 × 20                      | 1,500 | 0.050 | 0.16  | 1,260  | 1,200 | 0.050 | 0.16  | 1,260  | 1,000 | 0.050 | 0.16  | 1,260  |
| 10 × 12                     | 1,200 | 0.053 | 0.16  | 1,360  | 820   | 0.053 | 0.16  | 1,360  | 680   | 0.053 | 0.16  | 1,360  |
|                             |       |       |       |        | 1000  | 0.053 | 0.16  | 1,360  |       |       |       |        |
| 10 × 12.5                   | 1,200 | 0.053 | 0.16  | 1,360  | 820   | 0.053 | 0.16  | 1,360  | 680   | 0.053 | 0.16  | 1,360  |
|                             |       |       |       |        | 1000  | 0.053 | 0.16  | 1,360  |       |       |       |        |
| 10 × 16                     | 1,800 | 0.038 | 0.12  | 1,430  | 1,000 | 0.038 | 0.12  | 1,430  | 1,000 | 0.038 | 0.12  | 1,430  |
|                             |       |       |       |        | 1,500 | 0.038 | 0.12  | 1,430  |       |       |       |        |
| 10 × 20                     | 2,200 | 0.023 | 0.069 | 1,820  | 1,500 | 0.023 | 0.069 | 1,820  | 1,500 | 0.023 | 0.069 | 1,820  |
| 10 × 25                     | 3,300 | 0.022 | 0.066 | 2,150  | 2,200 | 0.022 | 0.066 | 2,150  | 1,800 | 0.022 | 0.066 | 2,150  |
| 12.5 × 16                   | 1,800 | 0.031 | 0.078 | 1,452  | 1,500 | 0.031 | 0.078 | 1,452  | 1,000 | 0.031 | 0.078 | 1,452  |
| 12.5 × 20                   | 3,900 | 0.021 | 0.053 | 2,360  | 3,300 | 0.021 | 0.053 | 2,360  | 2,200 | 0.021 | 0.053 | 2,360  |
| 12.5 × 25                   | 4,700 | 0.020 | 0.050 | 2,770  | 3,900 | 0.020 | 0.050 | 2,770  | 2,700 | 0.020 | 0.050 | 2,770  |
| 12.5 × 30                   | 5,600 | 0.018 | 0.046 | 3,290  | 4,700 | 0.018 | 0.046 | 3,290  | 3,300 | 0.018 | 0.046 | 3,290  |
| 12.5 × 35                   | 6,800 | 0.017 | 0.044 | 3,400  | 5,600 | 0.017 | 0.044 | 3,400  | 3,900 | 0.017 | 0.044 | 3,400  |
| 16 × 15                     | 2,700 | 0.040 | 0.101 | 1,375  | 1,800 | 0.040 | 0.101 | 1,375  | 1,200 | 0.040 | 0.101 | 1,375  |
| 16 × 20                     | 5,600 | 0.021 | 0.053 | 3,140  | 4,700 | 0.021 | 0.053 | 3,140  | 3,300 | 0.021 | 0.053 | 3,140  |
| 16 × 25                     | 6,800 | 0.019 | 0.051 | 3,460  | 5,600 | 0.019 | 0.051 | 3,460  | 4,700 | 0.019 | 0.051 | 3,460  |
| 16 × 31.5                   | 8,200 | 0.013 | 0.035 | 3,680  | 6,800 | 0.013 | 0.035 | 3,680  | 5,600 | 0.013 | 0.035 | 3,680  |
| 18 × 20                     | 5,600 | 0.020 | 0.052 | 3,265  | 4,700 | 0.020 | 0.052 | 3,265  | 3,300 | 0.020 | 0.052 | 3,265  |
| 18 × 25                     | 8,200 | 0.018 | 0.049 | 3,611  | 5,600 | 0.018 | 0.049 | 3,611  | 3,900 | 0.018 | 0.049 | 3,611  |

| V <sub>DC</sub><br>∅D×L(mm) | 25    |       |       |        | 35    |       |       |        | 50    |       |       |        |       |       |       |       |
|-----------------------------|-------|-------|-------|--------|-------|-------|-------|--------|-------|-------|-------|--------|-------|-------|-------|-------|
|                             | μF    | IMP.  |       | Ripple | μF    | IMP.  |       | Ripple | μF    | IMP.  |       | Ripple |       |       |       |       |
|                             |       | 20°C  | -10°C |        |       | 20°C  | -10°C |        |       | 20°C  | -10°C |        |       |       |       |       |
| 5 × 11                      | 68    | 0.30  | 1.0   | 250    | 47    | 0.30  | 1.0   | 250    | 1     | 2.50  | 8.68  | 53     |       |       |       |       |
|                             |       |       |       |        |       |       |       |        | 2.2   | 2.50  | 8.68  | 56     |       |       |       |       |
|                             |       |       |       |        |       |       |       |        | 4.7   | 1.50  | 5.21  | 82     |       |       |       |       |
|                             |       |       |       |        |       |       |       |        | 10    | 1.0   | 3.47  | 250    |       |       |       |       |
|                             |       |       |       |        |       |       |       |        | 22    | 0.30  | 1.04  | 250    |       |       |       |       |
|                             |       |       |       |        |       |       |       |        | 27    | 0.30  | 1.04  | 250    |       |       |       |       |
| 6.3 × 11                    | 150   | 0.13  | 0.41  | 405    | 100   | 0.13  | 0.41  | 405    | 47    | 0.14  | 0.50  | 350    |       |       |       |       |
|                             |       |       |       |        |       |       |       |        | 56    | 0.14  | 0.50  | 385    |       |       |       |       |
| 6.3 × 15                    | 220   | 0.10  | 0.32  | 646    | 150   | 0.10  | 0.32  | 646    | 100   | 0.10  | 0.32  | 646    |       |       |       |       |
| 8 × 11.5                    | 220   | 0.072 | 0.22  | 760    | 150   | 0.072 | 0.22  | 760    | 100   | 0.072 | 0.21  | 724    |       |       |       |       |
| 8 × 15                      | 390   | 0.060 | 0.18  | 818    | 270   | 0.060 | 0.18  | 818    | 120   | 0.060 | 0.24  | 818    |       |       |       |       |
| 8 × 20                      | 560   | 0.050 | 0.16  | 1,260  | 390   | 0.050 | 0.16  | 1,260  | 180   | 0.050 | 0.18  | 1,260  |       |       |       |       |
| 10 × 12                     | 330   | 0.053 | 0.16  | 1,360  | 220   | 0.053 | 0.16  | 1,360  | 150   | 0.061 | 0.18  | 979    |       |       |       |       |
|                             |       |       |       |        |       |       |       |        |       |       |       |        | 470   | 0.053 | 0.16  | 1,360 |
| 10 × 12.5                   | 330   | 0.053 | 0.16  | 1,360  | 220   | 0.053 | 0.16  | 1,360  | 150   | 0.061 | 0.18  | 979    |       |       |       |       |
|                             |       |       |       |        |       |       |       |        |       |       |       |        | 470   | 0.053 | 0.16  | 1,360 |
| 10 × 16                     | 470   | 0.038 | 0.12  | 1,430  | 470   | 0.038 | 0.12  | 1,430  | 220   | 0.042 | 0.12  | 1,370  |       |       |       |       |
|                             |       |       |       |        |       |       |       |        |       |       |       |        | 680   | 0.038 | 0.12  | 1,430 |
| 10 × 20                     | 680   | 0.023 | 0.069 | 1,820  | 560   | 0.023 | 0.069 | 1,820  | 330   | 0.030 | 0.090 | 1,580  |       |       |       |       |
|                             |       |       |       |        |       |       |       |        |       |       |       |        | 820   | 0.023 | 0.069 | 2,000 |
|                             |       |       |       |        |       |       |       |        |       |       |       |        | 1,000 | 0.025 | 0.075 | 1,900 |
| 10 × 25                     | 1,000 | 0.022 | 0.066 | 2,150  | 680   | 0.022 | 0.066 | 2,150  | 470   | 0.028 | 0.085 | 1,870  |       |       |       |       |
| 12.5 × 16                   | 680   | 0.031 | 0.078 | 1,452  | 470   | 0.031 | 0.078 | 1,452  | 270   | 0.042 | 0.078 | 1,071  |       |       |       |       |
| 12.5 × 20                   | 1,500 | 0.021 | 0.053 | 2,360  | 1,000 | 0.021 | 0.053 | 2,360  | 470   | 0.027 | 0.068 | 2,050  |       |       |       |       |
| 12.5 × 25                   | 1,800 | 0.020 | 0.050 | 2,770  | 1,000 | 0.020 | 0.050 | 2,770  | 560   | 0.023 | 0.059 | 2,410  |       |       |       |       |
|                             |       |       |       |        |       |       |       |        |       |       |       |        | 2,200 | 0.020 | 0.050 | 3,000 |
| 12.5 × 30                   | 2,200 | 0.018 | 0.046 | 3,290  | 1,500 | 0.018 | 0.046 | 3,290  | 680   | 0.021 | 0.052 | 2,860  |       |       |       |       |
| 12.5 × 35                   | 2,700 | 0.017 | 0.044 | 3,400  | 1,800 | 0.017 | 0.044 | 3,400  | 820   | 0.019 | 0.051 | 2,960  |       |       |       |       |
| 16 × 15                     | 820   | 0.040 | 0.101 | 1,375  | 560   | 0.040 | 0.101 | 1,375  | 390   | 0.046 | 0.114 | 1,196  |       |       |       |       |
| 16 × 20                     | 2,200 | 0.021 | 0.053 | 3,140  | 1,500 | 0.021 | 0.053 | 3,140  | 820   | 0.023 | 0.059 | 2,730  |       |       |       |       |
|                             |       |       |       |        | 1,800 | 0.019 | 0.051 | 3,460  |       |       |       |        |       |       |       |       |
| 16 × 25                     | 3,300 | 0.019 | 0.051 | 3,460  | 2,200 | 0.019 | 0.051 | 3,460  | 1,000 | 0.021 | 0.056 | 3,010  |       |       |       |       |
|                             |       |       |       |        | 2,200 | 0.019 | 0.051 | 3,460  |       |       |       |        |       |       |       |       |
| 16 × 31.5                   | 3,300 | 0.013 | 0.035 | 3,680  | 2,200 | 0.013 | 0.035 | 3,680  | 1,500 | 0.014 | 0.037 | 3,201  |       |       |       |       |
| 18 × 20                     | 2,200 | 0.020 | 0.052 | 3,265  | 1,500 | 0.020 | 0.052 | 3,265  | 1,000 | 0.022 | 0.059 | 2,850  |       |       |       |       |
| 18 × 25                     | 2,700 | 0.018 | 0.049 | 3,611  | 1,800 | 0.018 | 0.049 | 3,611  | 1,200 | 0.020 | 0.053 | 3,140  |       |       |       |       |

**RATINGS OF NXB Series**

| V <sub>DC</sub><br>∅D×L(mm) | 63    |       |       |        |
|-----------------------------|-------|-------|-------|--------|
|                             | μF    | IMP.  |       | Ripple |
|                             |       | 20°C  | -10°C |        |
| 5×11                        | 10    | 0.45  | 1.8   | 165    |
| 6.3×11                      | 33    | 0.30  | 1.2   | 265    |
| 6.3×15                      | 47    | 0.25  | 1.0   | 420    |
| 8×11.5                      | 47    | 0.20  | 0.80  | 500    |
|                             | 68    | 0.20  | 0.80  | 500    |
| 10×12                       | 68    | 0.16  | 0.64  | 600    |
| 10×12.5                     | 68    | 0.16  | 0.64  | 600    |
| 10×16                       | 100   | 0.10  | 0.40  | 945    |
| 10×20                       | 150   | 0.080 | 0.32  | 1,100  |
| 10×25                       | 220   | 0.070 | 0.28  | 1,300  |
| 12.5×20                     | 330   | 0.040 | 0.16  | 1,495  |
| 16×20                       | 470   | 0.035 | 0.14  | 1,990  |
| 16×25                       | 680   | 0.030 | 0.12  | 2,780  |
| 16×31.5                     | 1,000 | 0.020 | 0.080 | 2,835  |

| V <sub>DC</sub><br>∅D×L(mm) | 100 |       |       |        | 120 |       |       |        |
|-----------------------------|-----|-------|-------|--------|-----|-------|-------|--------|
|                             | μF  | IMP.  |       | Ripple | μF  | IMP.  |       | Ripple |
|                             |     | 20°C  | -10°C |        |     | 20°C  | -10°C |        |
| 5×11                        | 3.3 | 2.0   | 8.0   | 125    |     |       |       |        |
| 5×11                        | 4.7 | 2.0   | 8.0   | 125    |     |       |       |        |
| 6.3×11                      | 10  | 0.50  | 2.0   | 205    |     |       |       |        |
| 6.3×15                      | 22  | 0.40  | 1.6   | 300    |     |       |       |        |
| 8×11.5                      | 22  | 0.30  | 1.2   | 355    | 22  | 0.30  | 1.2   | 472    |
| 10×12                       | 33  | 0.25  | 1.0   | 450    | 33  | 0.25  | 1.0   | 599    |
| 10×12.5                     | 33  | 0.25  | 1.0   | 450    | 33  | 0.25  | 1.0   | 599    |
| 10×16                       | 47  | 0.20  | 0.80  | 580    | 47  | 0.20  | 0.80  | 771    |
| 12.5×20                     | 100 | 0.10  | 0.40  | 1,045  | 100 | 0.10  | 0.40  | 1,400  |
| 12.5×25                     | 150 | 0.070 | 0.28  | 1,195  | 120 | 0.070 | 0.28  | 1,589  |
| 16×25                       | 220 | 0.060 | 0.24  | 1,600  | 220 | 0.060 | 0.24  | 2,128  |
| 16×31.5                     | 330 | 0.040 | 0.16  | 1,750  | 270 | 0.040 | 0.16  | 2,328  |
|                             | 470 | 0.040 | 0.16  | 1,750  |     |       |       |        |
| 18×40                       | 820 | 0.030 | 0.12  | 2,060  | 560 | 0.036 | 0.144 | 2,740  |



**RIPPLE CURRENT MULTIPLIERS**

Frequency Multipliers

| Cap. (μF)   | Freq. (Hz) | 120  | 1k   | 10k  | 50k  | 100k |
|-------------|------------|------|------|------|------|------|
| 1 ~ 180     |            | 0.40 | 0.75 | 0.90 | 0.95 | 1.00 |
|             |            | 0.50 | 0.85 | 0.94 | 0.96 | 1.00 |
| 220 ~ 560   |            | 0.60 | 0.87 | 0.95 | 0.97 | 1.00 |
|             |            | 0.75 | 0.90 | 0.95 | 0.97 | 1.00 |
| 680 ~ 1,800 |            | 0.85 | 0.95 | 0.98 | 0.99 | 1.00 |
|             |            |      |      |      |      |      |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:*

*Click to view products by [SamYoung](#) manufacturer:*

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)  
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)  
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)  
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)  
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)  
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)  
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)  
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)  
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)