

- Features:
- High power metal alloy current sense resistor
 - Molded package for superior heat dissipation
 - Typical inductance <5nH
 - Ideal for power supplies and motor drives
 - Package size 2512 is qualified to AEC-Q200
 - RoHS compliant and halogen-free



| Electrical Specifications | | | | | |
|---------------------------|---------------------|-------------------------|---------------------|--------------|-------------------------------|
| Type / Code | Power Rating (Watt) | Maximum Working Voltage | Maximum Current (A) | TCR (ppm/°C) | Ohmic Range (Ω) and Tolerance |
| | | | | | 1%, 5% |
| CSM0603 | 0.33W | $(P \cdot R)^{1/2}$ | 5.6A | ±100 ppm/°C | 0.01 |
| CSM2512 | 3W | $(P \cdot R)^{1/2}$ | 54.8A | ±75 ppm/°C | 0.001 - 0.1 |



Operation Temperature Range: CSM0603 = -55°C ~ +155°C; CSM2512 = -55°C ~ +170°C

P=Rated Power (W)

R=Resistance Value (Ω)

| Mechanical Specifications | | | | | | |
|------------------------------|---------------|---------------|---------------|---------------|---------------|--------|
| | | | | | | |
| Type / Code | L | W | C | H | d | Unit |
| CSM0603 | 0.063 ± 0.004 | 0.031 ± 0.004 | 0.008 ± 0.004 | 0.012 ± 0.004 | 0.012 ± 0.004 | inches |
| | 1.60 ± 0.10 | 0.80 ± 0.10 | 0.20 ± 0.10 | 0.30 ± 0.10 | 0.30 ± 0.10 | mm |
| CSM2512 (0.001Ω - 0.004Ω) | 0.252 ± 0.008 | 0.126 ± 0.008 | 0.079 ± 0.008 | 0.028 ± 0.008 | 0.079 ± 0.008 | inches |
| | 6.40 ± 0.20 | 3.20 ± 0.20 | 2.00 ± 0.20 | 0.70 ± 0.20 | 2.00 ± 0.20 | mm |
| CSM2512 (>0.004Ω - 0.1Ω) | 0.252 ± 0.008 | 0.126 ± 0.008 | 0.035 ± 0.008 | 0.028 ± 0.008 | 0.035 ± 0.008 | inches |
| | 6.40 ± 0.20 | 3.20 ± 0.20 | 0.90 ± 0.20 | 0.70 ± 0.20 | 0.90 ± 0.20 | mm |

Power Derating Curve:

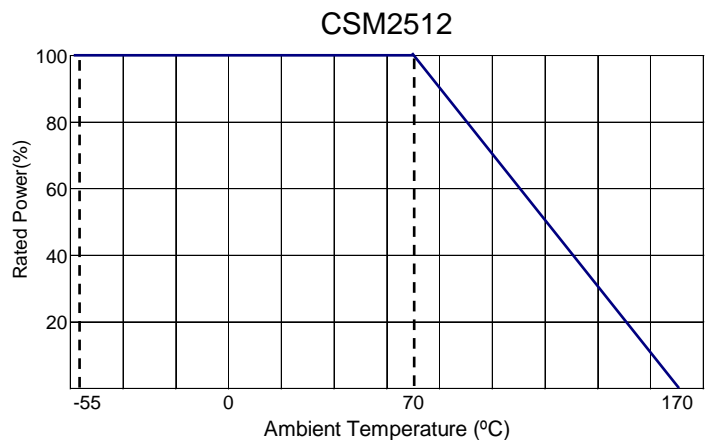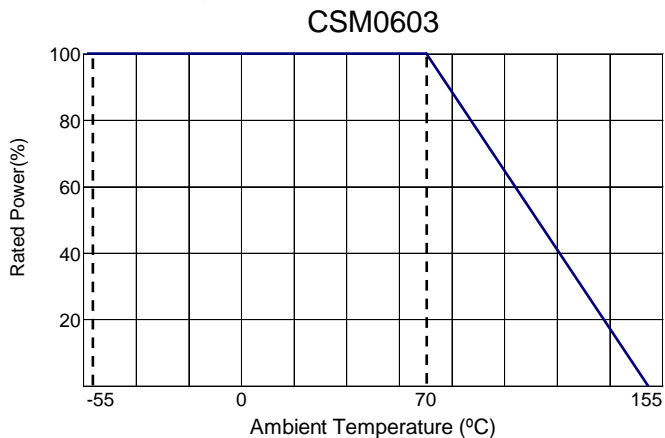

| Performance Characteristics | | |
|---------------------------------------|--|---|
| Test Items | Test Specifications | Test Condition |
| Temperature Coefficient of Resistance | CSM2512 ± 75 ppm/ $^{\circ}$ C CSM0603 ± 100 ppm/ $^{\circ}$ C | +25 $^{\circ}$ C ~ +125 $^{\circ}$ C |
| Load Life | $\pm 1\%$ | 1000 hours at rated power, 70 $^{\circ}$ C, 1.5 hours ON, 0.5 hours OFF |
| Short Time Overload | $\pm 0.5\%$ (for 0.04 - 0.1 Ω > rated power x 2.5 for 5 seconds) | 5 X rated power for 5 seconds |
| Moisture No Load | $\pm 0.5\%$ | 85 $^{\circ}$ C, 85% RH, 1000 hours |
| Temperature Cycle | $\pm 0.5\%$ | -55 $^{\circ}$ C and +155 $^{\circ}$ C, 300 cycles, 15 minutes per extreme condition |
| Resistance to Soldering Heat | $\pm 0.5\%$ | 260 $\pm 5^{\circ}$ C for 20 ± 1 seconds |
| Solderability | At least 95% of surface area of electrode must be covered with new solder | 245 $\pm 5^{\circ}$ C for 2 ± 0.5 seconds |
| High Temperature Exposure | $\pm 0.5\%$ | 170 $^{\circ}$ C for 1000 hours |
| Low Temperature Storage | $\pm 0.5\%$ | -55 $^{\circ}$ C for 1000 hours |
| Substrate Bending | $\pm 1\%$ | Bending width 2mm |
| Insulation Resistance | > 100M Ω | 100V DC for 1 minute |

Storage Conditions: Temperature 5 $^{\circ}$ C ~ 35 $^{\circ}$ C; R.H. 40% ~ 75%.

| Recommended Pad Layout | | | | |
|------------------------|-------|-------|-------|--------|
| | | | | |
| Type / Code | a | b | L | Unit |
| CSM0603 | 0.039 | 0.028 | 0.035 | inches |
| | 1.00 | 0.70 | 0.90 | mm |
| CSM2512 | 0.157 | 0.083 | 0.161 | inches |
| | 4.00 | 2.10 | 4.10 | mm |

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status | | | | | | |
|-------------------------|-------------------------------------|----------------------------|--------------------------------|-----------------------------------|--|---------------------------------------|
| Standard Product Series | Description | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition | Lead-Free Mfg. Effective Date (Std Product Series) | Lead-Free Effective Date Code (YY/WW) |
| CSM | Molded Metal Plate Sensing Resistor | SMD | YES | 100% Matte Sn over Ni | Always | Always |

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.


Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

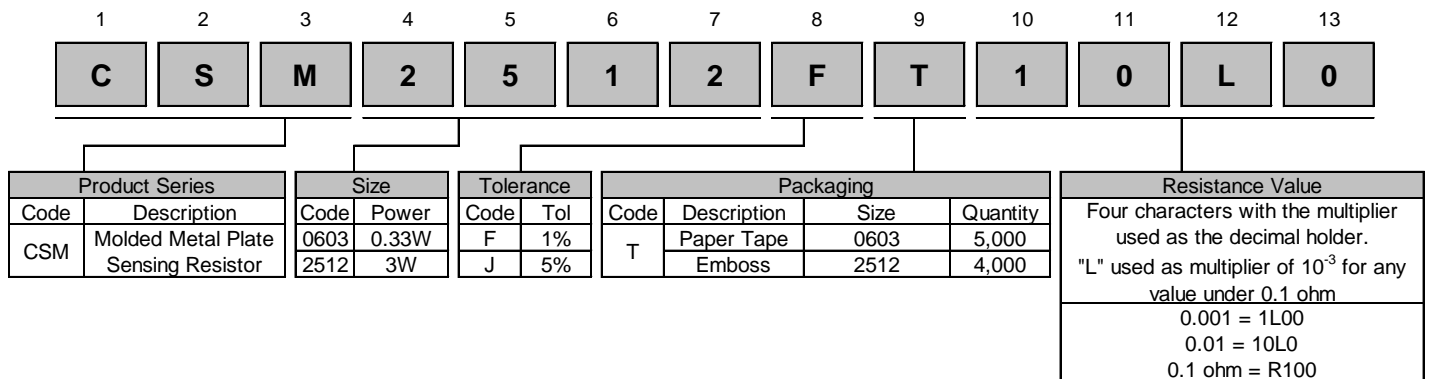

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category:](#)

Click to view products by [Stackpole manufacturer:](#)

Other Similar products are found below :

[5112](#) [65709-330JE](#) [PF2512FKF7W0R007L](#) [PR2512FKF7W0R003L](#) [PR2512FKF7W0R005L](#) [RCWL0603R500JNEA](#) [ERJ-3BQF1R1V](#) [ERJ-L14UJ42MU](#) [2-2176088-5](#) [PF2512FKF7W0R006L](#) [PF2512FKF7W0R033L](#) [2-2176089-4](#) [CD2015FC-0.10-1%](#) [PR2512FKF7W0R004L](#) [CGSSL1R01J](#) [CGSSL1R047J](#) [RC1005F124CS](#) [RCWE2512R110FKEA](#) [RCWL0805R330JNEA](#) [RL73H3AR47FTE](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [RLP73N1ER43JTD](#) [TL3AR01FTDG](#) [TLR3A20DR0005FTDG](#) [LRC-LR2512LF-01-R820J](#) [ERJ-3BQF4R3V](#) [ERJ-L14UF68MU](#) [TLR3A20DR001FTDG](#) [TLR3A30ER0005FTDG](#) [WR06X104JGLJ](#) [RLP73K1ER82JTD](#) [TL2BR01F](#) [TLR3A20DR01FTDG](#) [WSR3R0600FEA32](#) [ERJ-14BQF1R6U](#) [ERJ-14BQJR30U](#) [SP1220RJT](#) [SP1R12J](#) [ERJ-14BQF6R2U](#) [RL7520WT-R039-G](#) [PF1206FRF7W0R02L](#) [RL7520WT-R002-F](#) [RL7520WT-R047-F](#) [RLP73N2BR068FTDF](#) [RL7520WT-R005-F](#) [RCWE2512R220FKEA](#) [RCWE120625L0FMEA](#)