

Specification for Approval

Date: 2014/10/15

Customer : 友仁達

TAI-TECH P/N: **WCM2012F2SF-SERIES**

CUSTOMER P/N:

DESCRIPTION:

QUANTITY: _____ pcs

REMARK:		
Customer Approval Feedback		

西北臺慶科技股份有限公司
TAI-TECH Advanced Electronics Co., Ltd

西北臺慶科技股份有限公司
 TAI-TECH Advanced Electronics Co., Ltd
Headquarter:
 NO.1 YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI,
 TAO-YUAN HSIEN, TAIWAN, R.O.C.
 TEL: +886-3-4641148 FAX: +886-3-4643565
 http://www.tai-tech.com.tw
 E-mail: sales@tai-tech.com.tw

東莞臺慶精密電子有限公司
 DONGGUAN TAI-TECH ADVANCED ELECTRONICS CO., LTD
 JITIGANG MANAGEMENT DISTRICT, HUANGJIANG, DONGGUAN,
 GUANGDONG, CHINA
 TEL: +86-769-3365488 FAX: +86-769-3366896
 E-mail: twnwe@pub.dgnet.gd.cn

Office:
 金亨國際有限公司
 KAMHENG INTERNATIONAL LIMITED
 TEL: +86-852-25772033 FAX: +86-852-28817778

臺慶精密電子(昆山)有限公司
 TAI-TECH ADVANCED ELECTRONICS(KUNSHAN) CO., LTD
 SHINWHA ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN,
 JIANG-SU, CHINA
 TEL: +86-512-57619396 FAX: +86-512-57619688
 E-mail: hui@tai-tech.com.tw

Office:
 北欣國際有限公司
 NORTH STAR INTERNATIONAL LIMITED
 TEL: +86-512-57619396 FAX: +86-512-57619688

Sales Dep.

APPROVED	CHECKED
王貞方 Eva Wang	鐘明君 Mandy Chung

R&D Center

APPROVED	CHECKED	DRAWN
楊祥忠 Mikey Yang	林志鴻 Zhi-Hong Lin	林宜蒨 Beryl Lin

Wire Wound Type Common Mode Filter





WCM2012F2SF-SERIES

1.Features

1. High common mode impedance at high frequency cause excellent noise suppression performance.
2. WCM2012F2SF series realizes small size and low profile. 2.0x1.2x1.2 mm.
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant.



2.Dimension



Series	A(mm)	B(mm)	C(mm)	D1(mm)	D2(mm)	E(mm)
2012F2SF	2.0±0.2	1.2±0.2	1.2±0.2	0.55±0.1	0.46±0.1	0.15±0.1

3.Part Numbering














- A: Series
 B: Dimension
 C: Material Ferrite Core
 D: Number of Lines 2=2 lines
 E: Type S=Shielded , N=Unshielded
 F: Lead free
 G: Impedance 900=90Ω
 H: Packaging T=Taping and Reel
 I: Rated Current 04=400mA

4.Specification


TAI-TECH Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)max.	Rated Volt. (Vdc)max.	Withstand Volt. (Vdc) max.	IR (Ω) min.
WCM2012F2SF-670T04	67±25%	100	0.25	400	50	125	10M
WCM2012F2SF-900T04	90±25%	100	0.30	400	50	125	10M
WCM2012F2SF-121T04	120±25%	100	0.30	400	50	125	10M
WCM2012F2SF-161T03	160±25%	100	0.35	350	50	125	10M
WCM2012F2SF-181T03	180±25%	100	0.35	350	50	125	10M
WCM2012F2SF-201T03	200±25%	100	0.40	300	50	125	10M
WCM2012F2SF-221T03	220±25%	100	0.40	300	50	125	10M
WCM2012F2SF-261T03	260±25%	100	0.40	300	50	125	10M
WCM2012F2SF-361T03	360±25%	100	0.50	300	50	125	10M
WCM2012F2SF-601T03	600±25%	100	0.88	300	50	125	10M
WCM2012F2SF-102T01	1000±25%	100	1.3	100	50	125	10M

Typical Impedance v.s. Frequency Curve

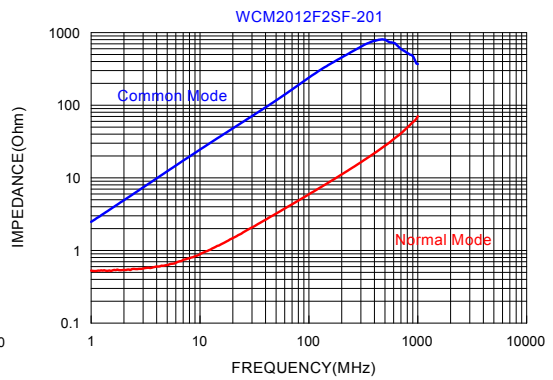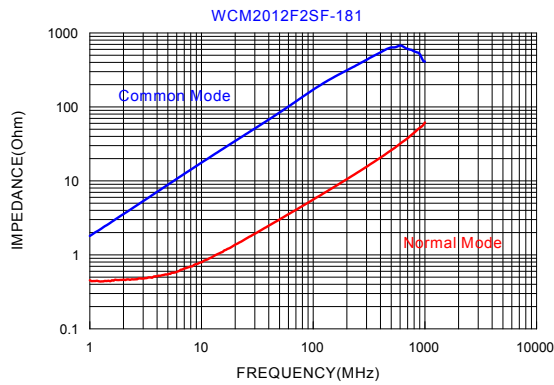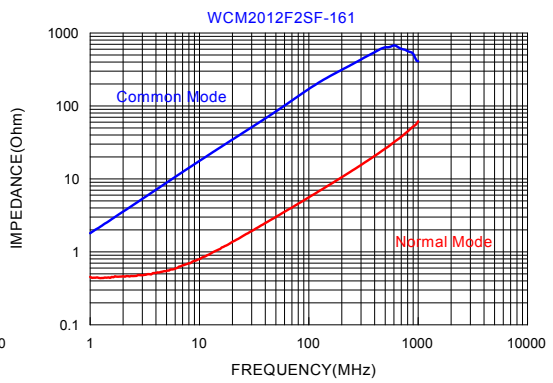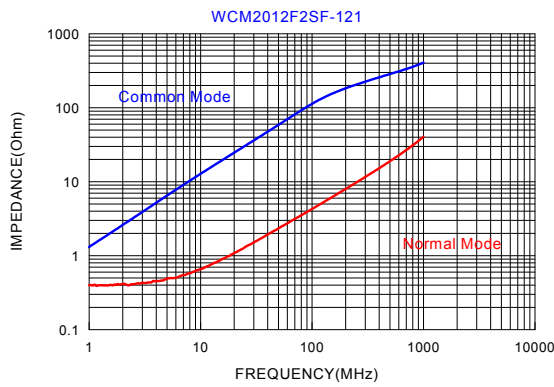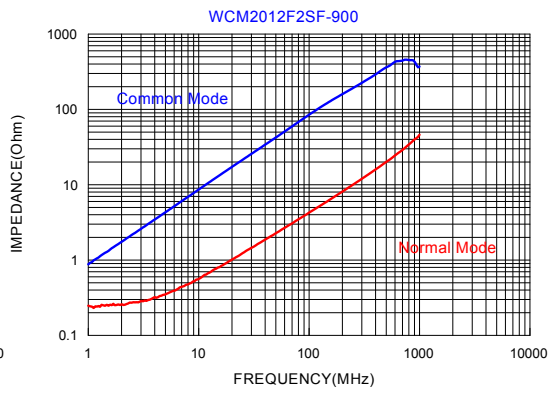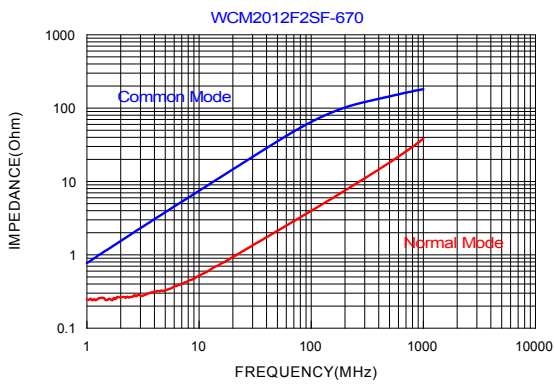

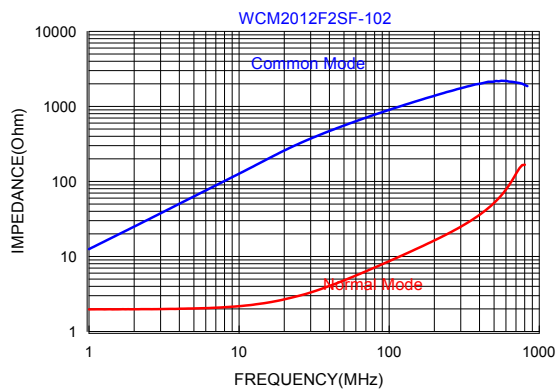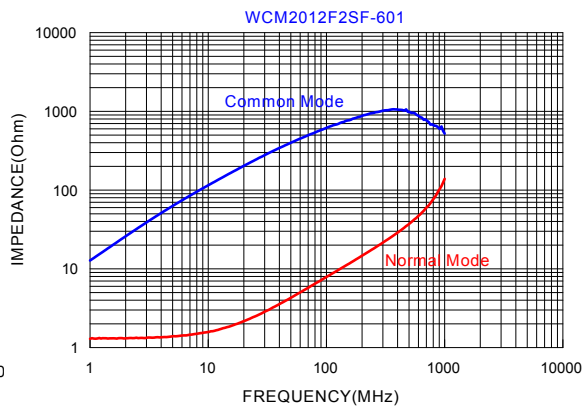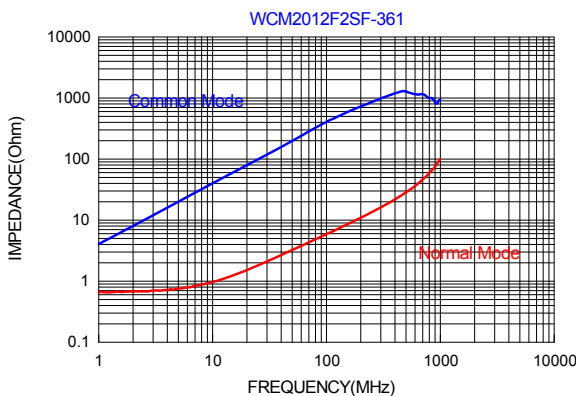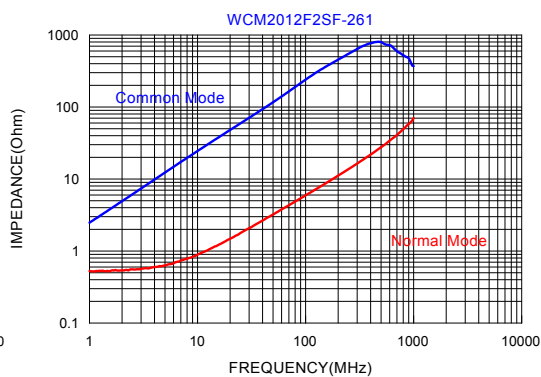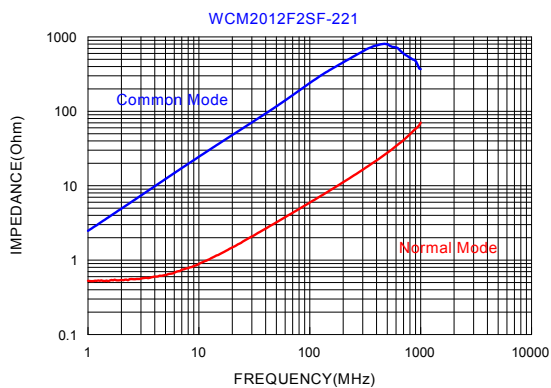


5.Schematic Diagram

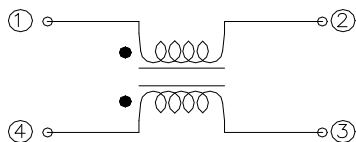


6. Materials

No.	Description	Specification
a.	Upper Plate	Ferrite
b.	Core	Ferrite Core
c.	Termination	Tin (Pb Free)
d.	Wire	Enameled Copper Wire

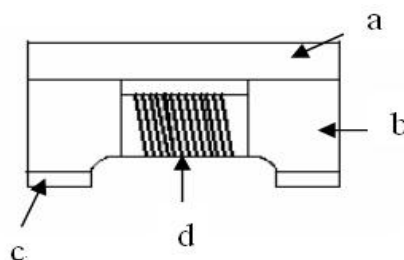

7. Reliability and Test Condition


Item	Performance	Test Condition
Electrical Characteristics Test		
Z(common mode)	Refer to standard electrical characteristics list.	Agilent-4291A+ Agilent -16197A
DCR		Agilent-4338B
I.R.		Agilent4339
Operating Temperature	-40°C~+125°C	
Storage Temperature(on board)		
Temperature Rise Test	Rated Current < 1A ΔT 20°CMax Rated Current ≧ 1A ΔT 40°CMax	1.Applied the allowed DC current. 2. Temperature measured by digital surface thermometer
Mechanical Performance Test		
Solderability Test	More than 95% of terminal electrode should be covered with solder.	Preheat: 150°C,60sec. ◦ Solder: Sn99.5%-Cu0. 5% ◦ Temperature: 245±5°C ◦ Flux for lead free: Rosin. 9.5% ◦ Dip time: 4±1sec ◦ Depth: completely cover the termination

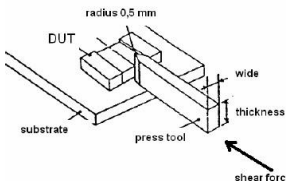Item	Performance	Test Condition								
Solder Heat Resistance		<table border="1" data-bbox="1061 320 1425 421"> <thead> <tr> <th>Temperature (°C)</th> <th>Time (s)</th> <th>Temperature ramp/immersion and emersion rate</th> <th>Number of heat cycles</th> </tr> </thead> <tbody> <tr> <td>260 ±5 (solder temp)</td> <td>10 ±1</td> <td>25mm/s ±6 mm/s</td> <td>1</td> </tr> </tbody> </table> <p>Depth: completely cover the termination</p>	Temperature (°C)	Time (s)	Temperature ramp/immersion and emersion rate	Number of heat cycles	260 ±5 (solder temp)	10 ±1	25mm/s ±6 mm/s	1
Temperature (°C)	Time (s)	Temperature ramp/immersion and emersion rate	Number of heat cycles							
260 ±5 (solder temp)	10 ±1	25mm/s ±6 mm/s	1							
Terminal Strength	Appearance : No damage. Impedance : within±15% of initial value RDC : within ±15% of initial value and shall not exceed the specification value	<p>Preconditioning:Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020DCclassification Reflow Profiles</p> <p>With the component mounted on a PCB with the device to be tested, apply a force (>0805:1kg , <=0805:0.5kg)to the side of a device being tested. This force shall be applied for 60 +1 seconds. Also the force shall be applied gradually as not to apply a shock to the component being tested.</p> 								
Reliability Test										
Life Test		<p>Preconditioning:Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020DCclassification Reflow Profiles</p> <p>Temperature : 125±2°C (Bead)</p> <p>Temperature : 85±2°C (Inductor)</p> <p>Applied current : rated current</p> <p>Duration : 1000±12hrs</p> <p>Measured at room temperature after placing for 24±2 hrs</p>								
Thermal shock	Appearance : No damage. Impedance : within±15% of initial value RDC : within ±15% of initial value and shall not exceed the specification value	<p>Preconditioning:Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020DCclassification Reflow Profiles</p> <p>Step1 : -40±2°C 30±5min</p> <p>Step2 : 25±2°C ≤0.5min</p> <p>Step3 : 105±2°C 30±5min</p> <p>Number of cycles : 500</p> <p>Measured at room temperature after placing for 24±2 hrs</p>								
Humidity Resistance Test		<p>Preconditioning:Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020DCclassification Reflow Profiles</p> <p>Humidity : 85±2% R.H,</p> <p>Temperature : 85°C±2°C</p> <p>Duration : 1000hrs Min. with 100% rated current</p> <p>Measured at room temperature after placing for 24±2 hrs</p>								
Vibration Test		<p>Preconditioning:Run through IR reflow for 2 times.(IPC/JEDEC J-STD-020DCclassification Reflow Profiles</p> <p>Oscillation Frequency: 10~2K~10Hz for 20 minutes</p> <p>Equipment : Vibration checker</p> <p>Total Amplitude:1.52mm±10%</p> <p>Testing Time : 12 hours(20 minutes, 12 cycles each of 3 orientations) °</p>								

8.Soldering and Mounting

8-1. Recommended PC Board Pattern

	WCM2012F2S/F2N	WCM3216F2S/F2N
L	2.60	3.70
H	1.25	1.60
G1	1.10	1.90
G2	0.45	0.40



PC board should be designed so that products can prevent damage from mechanical stress when warping the board.

Products shall be positioned in the sideways direction to against the mechanical stress to prevent failure.

8-2. Soldering

Mildly activated rosin fluxes are preferred. TAI-TECH terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.


8-2.1 Lead Free Solder re-flow:

Recommended temperature profiles for re-flow soldering in Figure 1.

8-2.2 Soldering Iron(Figure 2):


Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 355°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 4~5 sec.

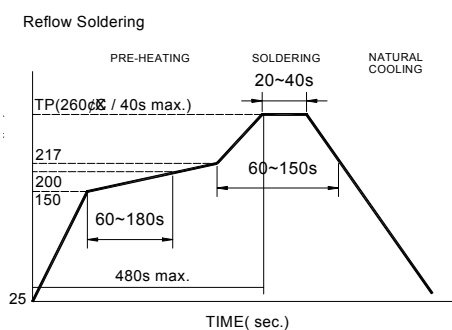

Reflow times: 3 times max.

Fig.1

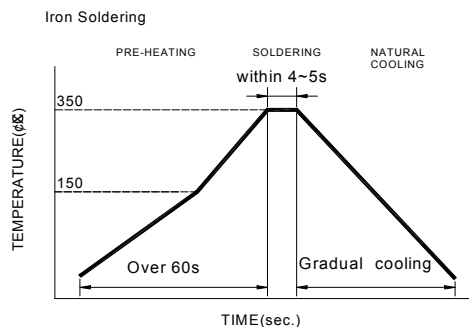


Iron Soldering times: 1 times max.

Fig.2


9. Packaging Information

9-1. Reel Dimension

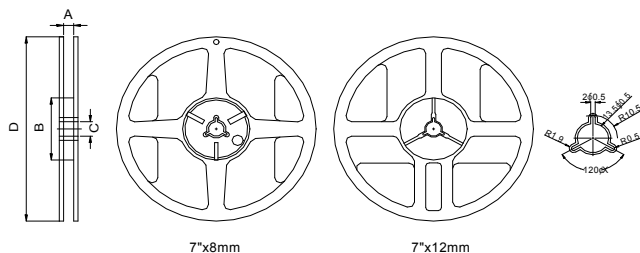

Type	A(mm)	B(mm)	C(mm)	D(mm)
7"x8mm	9.0±0.5	60±2	13.5±0.5	178±2

9-2. Tape Dimension / 8mm

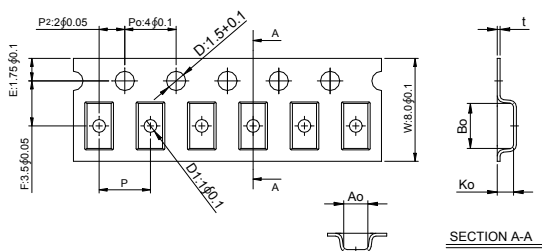


Series	size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
WCM2012F2S	201212	2.25±0.1	1.50±0.1	1.45±0.1	4.0±0.1	0.24±0.05
WCM3216F2S	321620	3.50±0.1	1.88±0.1	2.10±0.1	4.0±0.1	0.22±0.05
WCM2012F2N	201209	2.50±0.1	1.60±0.1	1.25±0.1	4.0±0.1	0.22±0.05
WCM3216F2N	321615	3.50±0.1	1.88±0.1	1.80±0.1	4.0±0.1	0.22±0.05

9-3. Packaging Quantity

Chip size	Chip/Reel	Inner Box	Middle Box	Carton
WCM2012F2S/F2N	2000	10000	50000	100000
WCM3216F2S/F2N	2000	10000	50000	100000

9-4. Tearing Off Force

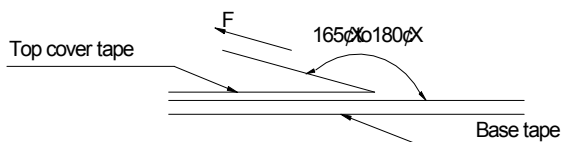

The force for tearing off cover tape is 15 to 80 grams in the arrow direction under the following conditions.

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

Application Notice

- Storage Conditions(component level)
To maintain the solderability of terminal electrodes:
 1. TAI-TECH products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
 2. Temperature and humidity conditions: Less than 40°C and 60% RH.
 3. Recommended products should be used within 12 months form the time of delivery.
 4. The packaging material should be kept where no chlorine or sulfur exists in the air.
- Transportation
 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [TAITEC](#) manufacturer:

Other Similar products are found below :

[RGCMF1210900H3T](#) [B82722A2102N001](#) [UAL21V07012500](#) [UAL24VR06500CH](#) [UALSC0220G0000](#) [UALSC058000000](#)
[UALSC0580J0000](#) [UALSC1520JH000](#) [UALSU10VR15019](#) [UALSU10VR20010](#) [UALSU16VD30030](#) [UALSU16VD40010](#)
[UALSU9H0305000](#) [UALSU9HF030600](#) [UALSU9HF060300](#) [UALSU9HR050340](#) [UALSU9VD070100](#) [UALSU9VR070170](#) [5701610000](#)
[CM7060M132R-10](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9VD070400](#) [UALSU9V0701000](#) [UALSU9HR030900](#)
[UALSU9HF050500](#) [UALSU9H0701000](#) [UALSU9H0208000](#) [UALSU9H0110000](#) [UALSCF25081300](#) [UALSC0305GS000](#)
[UALSC0120G0000](#) [UAL24VK06450CH](#) [UAL11VL1105000](#) [RN112-3.6-02-0M4](#) [RN114-1.2-02-10M](#) [RN122-0.6-02-47M](#) [RN122-3-02-4M5](#)
[RN142-1-02-33M](#) [RN214-2.5-02-3M3](#) [RN112-2-02-1M0](#) [RN143-6-02-1M8](#) [RN214-0.8-02-27M](#) [RN242-1.4-02-27M](#) [EXC-X4CH120X](#)
[DLW5BTM102TQ2L](#) [CMF16-153131](#) [CMF23H-273141](#) [744252510](#) [B82793C0253N201](#)