

REV.	ECON. NO.	APPD.
A		


NOTES:  
 Current Rating:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact plating:Au or Sn Over Ni  
 Insulator Material:PBT+30%GF(UL94V-0)

# Ordering Information

MTFD10-XXB1

No. of Pins
06 30
08 34
10 36
14 40
16 50
20 60
24 64
26

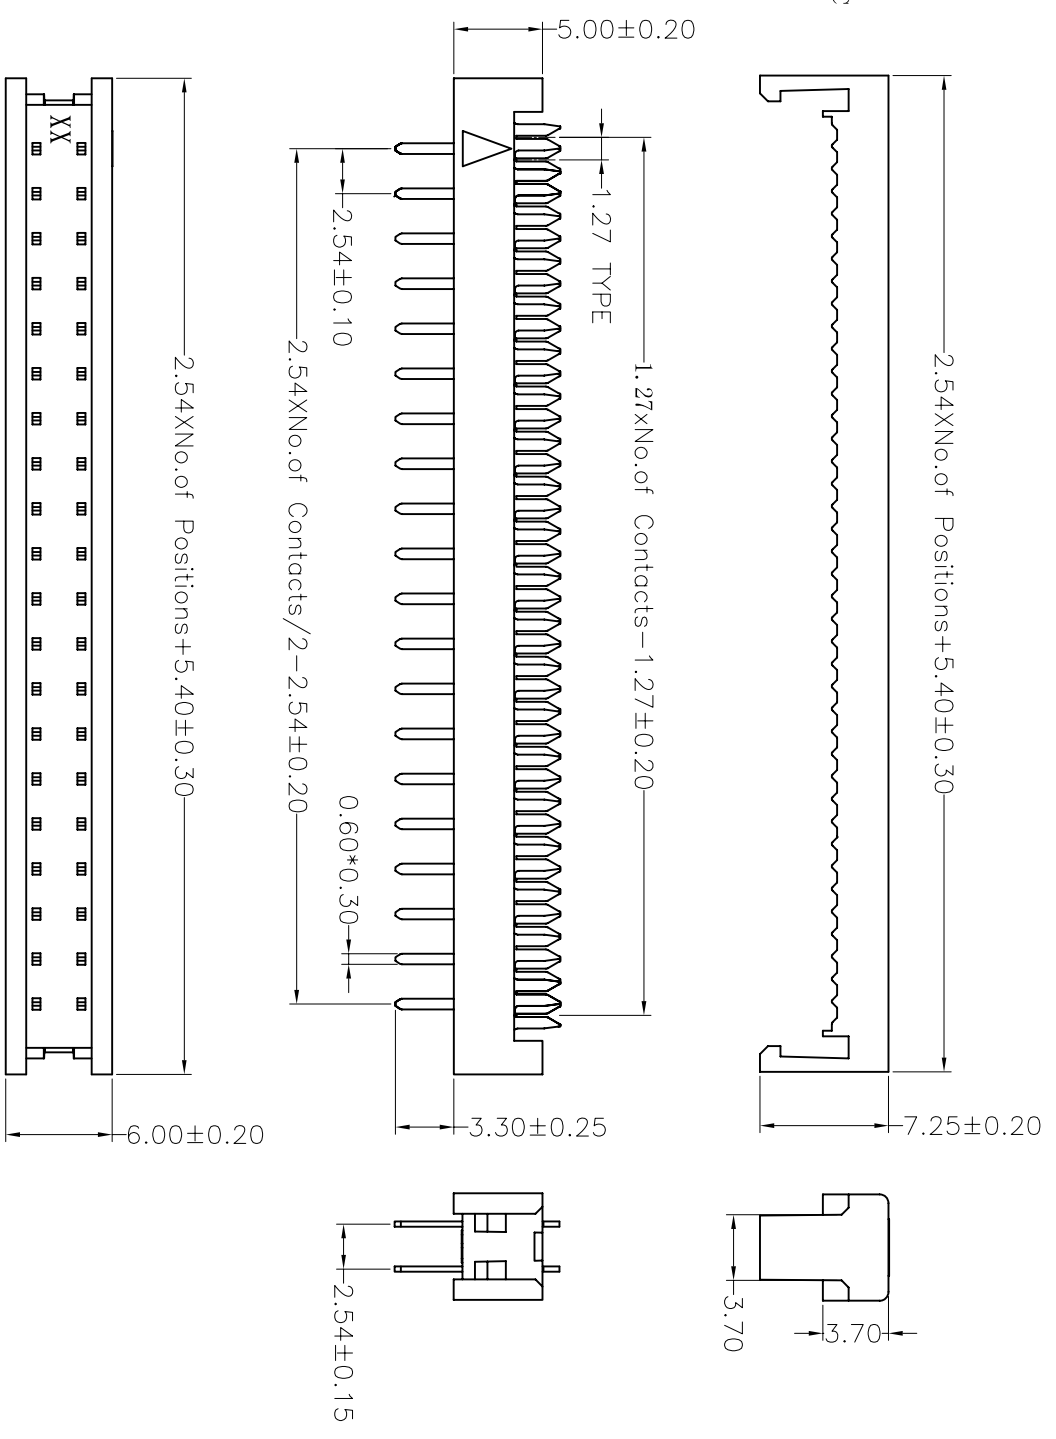

X. $\pm 0.30$	X°. $\pm 5^\circ$	UNITS	mm	NAME (INTENDED USE)	MINTRON CO., LTD.
X $\pm 0.20$	X° $\pm 2^\circ$	MAT'L			
.XX $\pm 0.10$	.XX° $\pm 1^\circ$	FINISH		PART NO. (INTENDED USE)	TITLE: 2.54 DIP PLUG (TERMINATED HEIGHT 7.2)
.XXX $\pm 0.05$	.XXX° $\pm 0.5^\circ$			APPD: SUNNY	DWG NO.: MTFD10-XXB1
DIP PULG CONNECTOR		QTY		CHKD: LISA	SCALE: 1/1
		DR: ZOE		2006-11-28	SHEET: 1/1
					REV: A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [MINTRON](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)