

REV.	ECON. NO.	APPD.
A		


NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au Over Ni
 Insulator Material: PBT+30%GF (UL94V-0)

Ordering Information

MTFC32-XXUW

- No. of Pins
- 06P 30P
 - 08P 34P
 - 10P 40P
 - 12P 44P
 - 14P 50P
 - 16P 60P
 - 20P 68P
 - 26P 80P

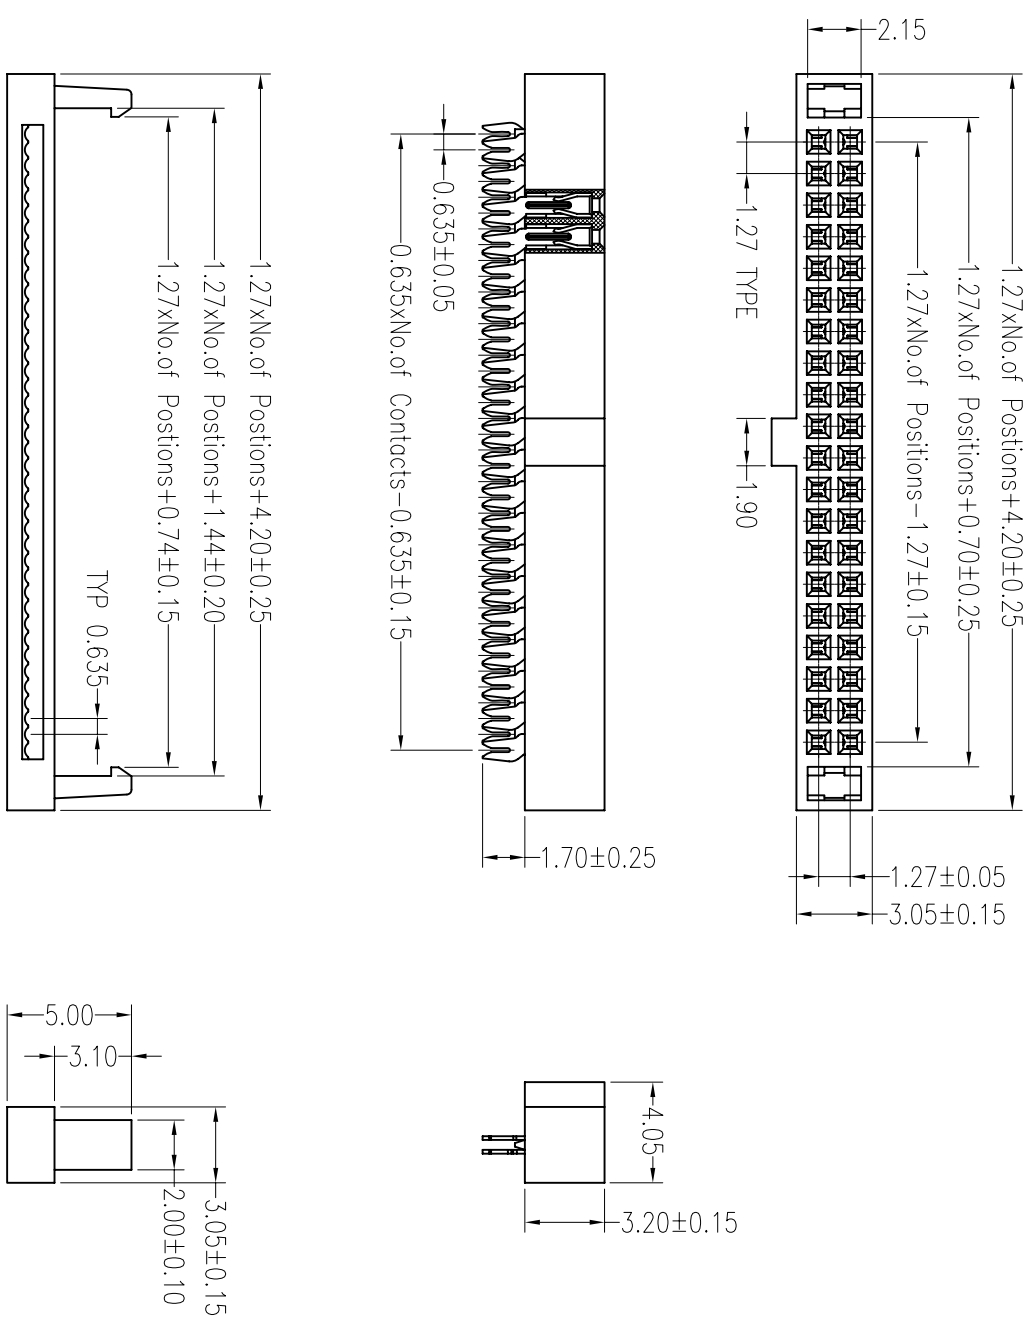

X.	± 0.30	X.°	± 5°	UNITS	mm	NAME (INTENDED USE)	MINTRON CO., LTD.
X	± 0.20	X°	± 2°	MATL		PART NO. (INTENDED USE)	IDC SOCKET 1.27*1.27 WITH BUMP
XX	± 0.10	XX°	± 1°	FINISH		APPD:	SUNNY
.XXX ± 0.05	.XXX° ± 0.5°			QTY		CHKD:	USA
IDC SOCKET CONNECTOR						DR:	ZOE
							2006-11-28
						DWG NO.:	MTFC32-XXUW
						SCALE	1 / 1
						SHEET	1 / 1
						REV.	A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [MINTRON](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)