
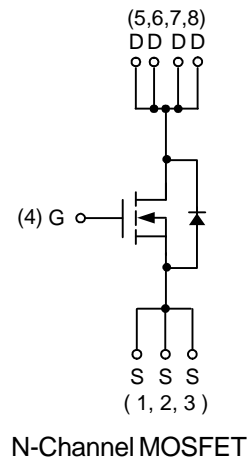


N-Channel Enhancement Mode MOSFET

### Features

- 30V/11A,  
 $R_{DS(ON)} = 9.5m\Omega(Typ.) @ V_{GS} = 10V$   
 $R_{DS(ON)} = 13.5m\Omega(Typ.) @ V_{GS} = 4.5V$
- Super High Dense Cell Design
- Avalanche Rated
- Reliable and Rugged
- Lead Free and Green Devices Available  
 (RoHS Compliant)

### Pin Description

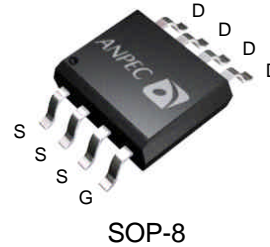

### Applications

- Power Management in Notebook Computer, and DC-DC Converters in Networking Systems.

### Ordering and Marking Information

|                                                                                                                                                                       |                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>APM4826 □□-□□ □</p> <div style="margin-left: 20px;"> <p>└─ Assembly Material</p> <p>└─ Handling Code</p> <p>└─ Temperature Range</p> <p>└─ Package Code</p> </div> | <p>Package Code<br/>K : SOP-8</p> <p>Operating Junction Temperature Range<br/>C : -55 to 150 °C</p> <p>Handling Code<br/>TR : Tape &amp; Reel</p> <p>Assembly Material<br/>G : Halogen and Lead Free Device</p> |
| <p>APM4826 K : <span style="border: 1px solid black; padding: 2px;">APM4826<br/>XXXXX</span></p>                                                                      | <p>XXXXX - Date Code</p>                                                                                                                                                                                        |

Note: ANPEC lead-free products contain molding compounds/die attach materials and 100% matte tin plate termination finish; which are fully compliant with RoHS. ANPEC lead-free products meet or exceed the lead-free requirements of IPC/JEDEC J-STD-020D for MSL classification at lead-free peak reflow temperature. ANPEC defines "Green" to mean lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight).

ANPEC reserves the right to make changes to improve reliability or manufacturability without notice, and advise customers to obtain the latest version of relevant information to verify before placing orders.

## Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Symbol                | Parameter                                               | Rating                 | Unit             |                    |
|-----------------------|---------------------------------------------------------|------------------------|------------------|--------------------|
| $V_{DSS}$             | Drain-Source Voltage                                    | 30                     | V                |                    |
| $V_{GSS}$             | Gate-Source Voltage                                     | $\pm 20$               |                  |                    |
| $I_D^a$               | Continuous Drain Current ( $V_{GS}=10V$ )               | $T_A=25^\circ\text{C}$ | 12               | A                  |
|                       |                                                         | $T_A=70^\circ\text{C}$ | 9.5              |                    |
| $I_{DM}^a$            | 300 $\mu\text{s}$ Pulsed Drain Current ( $V_{GS}=10V$ ) | 40                     |                  |                    |
| $I_S^a$               | Diode Continuous Forward Current                        | 3                      | A                |                    |
| $I_{AR}^b$            | Avalanche Current                                       | 22.5                   | A                |                    |
| $E_{AR}^b$            | Repetitive Avalanche Energy ( $L=0.3\text{mH}$ )        | 75                     | mJ               |                    |
| $T_J$                 | Maximum Junction Temperature                            | 150                    | $^\circ\text{C}$ |                    |
| $T_{STG}$             | Storage Temperature Range                               | -55 to 150             |                  |                    |
| $P_D^a$               | Maximum Power Dissipation                               | $T_A=25^\circ\text{C}$ | 2.5              | W                  |
|                       |                                                         | $T_A=70^\circ\text{C}$ | 1.6              |                    |
| $R_{\theta JA}^{a,c}$ | Thermal Resistance-Junction to Ambient                  | $t \leq 10\text{s}$    | 50               | $^\circ\text{C/W}$ |
| $R_{\theta JL}$       | Thermal Resistance-Junction to Lead                     | Steady State           | 25               | $^\circ\text{C/W}$ |

Note a : Surface Mounted on 1in<sup>2</sup> pad area,  $t \leq 10\text{sec}$ .

Note b : UIS tested and pulse width limited by maximum junction temperature 150 $^\circ\text{C}$  (initial temperature  $T_J=25^\circ\text{C}$ ).

Note c : Maximum under Steady State conditions is 75  $^\circ\text{C/W}$ .

## Electrical Characteristics ( $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Symbol                        | Parameter                        | Test Conditions                           | APM4826K |      |           | Unit          |
|-------------------------------|----------------------------------|-------------------------------------------|----------|------|-----------|---------------|
|                               |                                  |                                           | Min.     | Typ. | Max.      |               |
| <b>Static Characteristics</b> |                                  |                                           |          |      |           |               |
| $BV_{DSS}$                    | Drain-Source Breakdown Voltage   | $V_{GS}=0V, I_{DS}=250\mu\text{A}$        | 30       | -    | -         | V             |
| $I_{DSS}$                     | Zero Gate Voltage Drain Current  | $V_{DS}=24V, V_{GS}=0V$                   | -        | -    | 1         | $\mu\text{A}$ |
|                               |                                  | $T_J=85^\circ\text{C}$                    | -        | -    | 30        |               |
| $V_{GS(th)}$                  | Gate Threshold Voltage           | $V_{DS}=V_{GS}, I_{DS}=250\mu\text{A}$    | 1.3      | 1.8  | 2.5       | V             |
| $I_{GSS}$                     | Gate Leakage Current             | $V_{GS}=\pm 20V, V_{DS}=0V$               | -        | -    | $\pm 100$ | nA            |
| $R_{DS(ON)}^e$                | Drain-Source On-state Resistance | $V_{GS}=10V, I_{DS}=12A$                  | -        | 9.5  | 12        | m $\Omega$    |
|                               |                                  | $V_{GS}=4.5V, I_{DS}=9A$                  | -        | 13.5 | 18        |               |
| <b>Diode Characteristics</b>  |                                  |                                           |          |      |           |               |
| $V_{SD}^e$                    | Diode Forward Voltage            | $I_{SD}=3A, V_{GS}=0V$                    | -        | 0.75 | 1.3       | V             |
| $t_{rr}$                      | Reverse Recovery Time            | $I_{SD}=12A, dI_{SD}/dt=100A/\mu\text{s}$ | -        | 18   | -         | ns            |
| $Q_{rr}$                      | Reverse Recovery Charge          |                                           | -        | 11   | -         | nC            |

## Electrical Characteristics (Cont.) (T<sub>A</sub> = 25°C Unless Otherwise Noted)


| Symbol                                          | Parameter                    | Test Conditions                                                                                                 | APM4826K |      |      | Unit |
|-------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------|----------|------|------|------|
|                                                 |                              |                                                                                                                 | Min.     | Typ. | Max. |      |
| <b>Dynamic Characteristics <sup>f</sup></b>     |                              |                                                                                                                 |          |      |      |      |
| R <sub>G</sub>                                  | Gate Resistance              | V <sub>GS</sub> =0V, V <sub>DS</sub> =0V, F=1MHz                                                                | 1        | 1.7  | 3    | Ω    |
| C <sub>iss</sub>                                | Input Capacitance            | V <sub>GS</sub> =0V,<br>V <sub>DS</sub> =15V,<br>Frequency=1.0MHz                                               | -        | 1150 | 1400 | pF   |
| C <sub>oss</sub>                                | Output Capacitance           |                                                                                                                 | -        | 170  | -    |      |
| C <sub>rss</sub>                                | Reverse Transfer Capacitance |                                                                                                                 | -        | 135  | -    |      |
| t <sub>d(ON)</sub>                              | Turn-on Delay Time           | V <sub>DD</sub> =15V, R <sub>L</sub> =15Ω,<br>I <sub>DS</sub> =1A, V <sub>GEN</sub> =10V,<br>R <sub>G</sub> =6Ω | -        | 10   | 19   | ns   |
| t <sub>r</sub>                                  | Turn-on Rise Time            |                                                                                                                 | -        | 12   | 23   |      |
| t <sub>d(OFF)</sub>                             | Turn-off Delay Time          |                                                                                                                 | -        | 30   | 55   |      |
| t <sub>f</sub>                                  | Turn-off Fall Time           |                                                                                                                 | -        | 7    | 14   |      |
| <b>Gate Charge Characteristics <sup>f</sup></b> |                              |                                                                                                                 |          |      |      |      |
| Q <sub>g</sub>                                  | Total Gate Charge            | V <sub>DS</sub> =15V, V <sub>GS</sub> =10V,<br>I <sub>DS</sub> =12A                                             | -        | 25.3 | 35   | nC   |
| Q <sub>gs</sub>                                 | Gate-Source Charge           |                                                                                                                 | -        | 3.5  | -    |      |
| Q <sub>gd</sub>                                 | Gate-Drain Charge            |                                                                                                                 | -        | 6.5  | -    |      |

Note e : Pulse test ; pulse width ≤ 300μs, duty cycle ≤ 2%.


Note f : Guaranteed by design, not subject to production testing.

## Typical Operating Characteristics


Power Dissipation

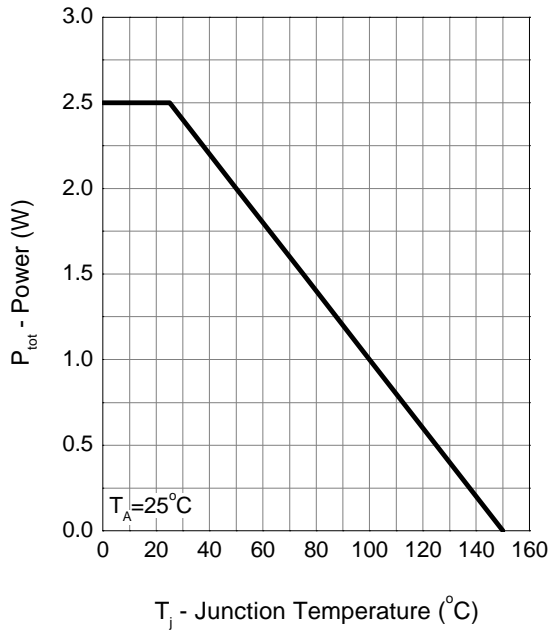


Drain Current

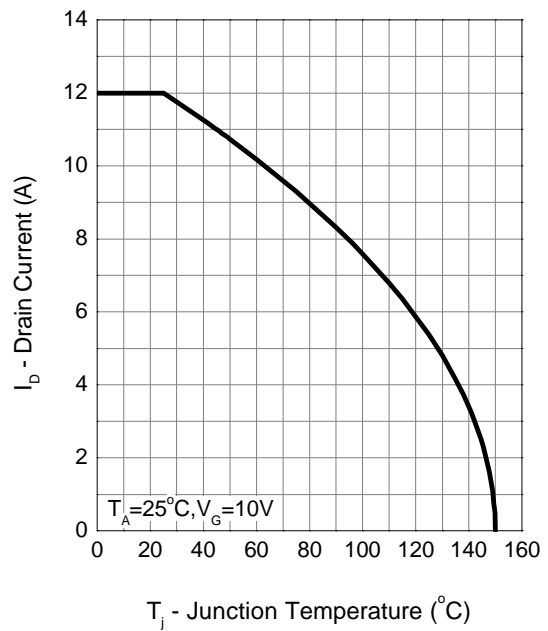

Safe Operation Area

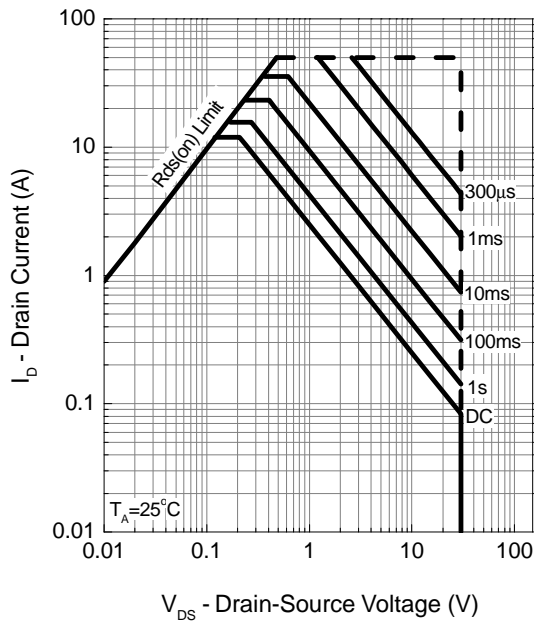


Thermal Transient Impedance

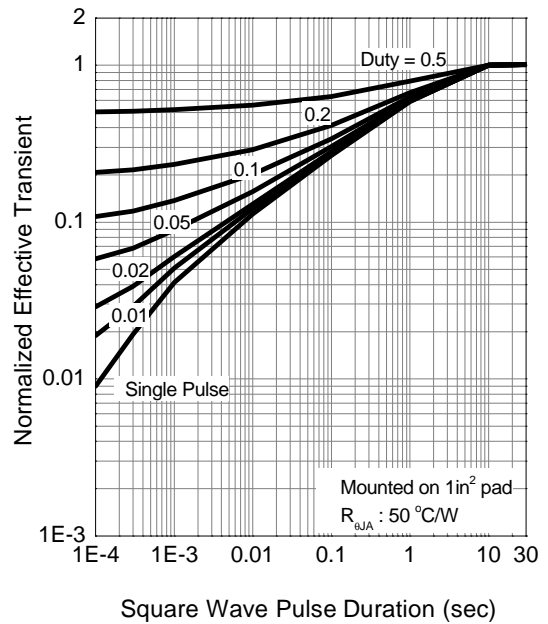


Typical Operating Characteristics (Cont.)


Output Characteristics

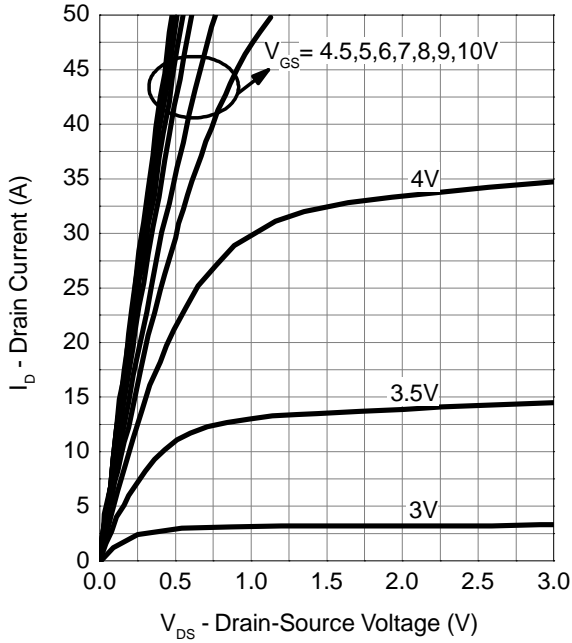


Drain-Source On Resistance

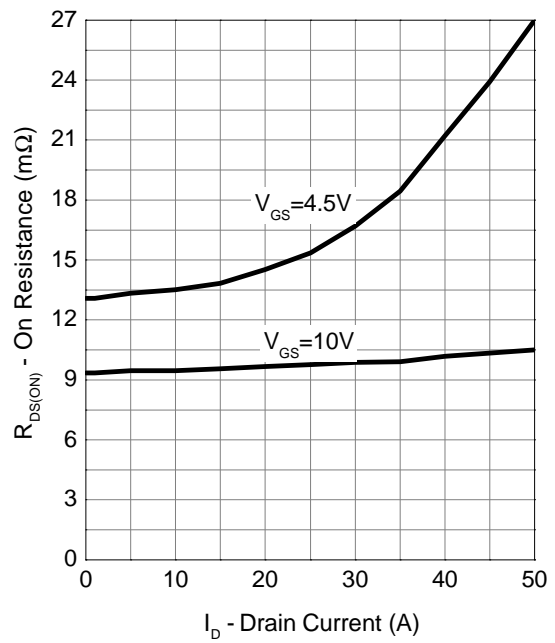

Gate-Source On Resistance

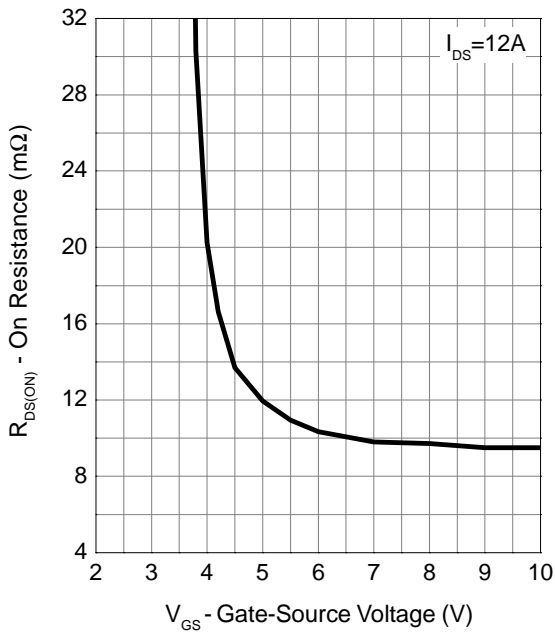


Gate Threshold Voltage

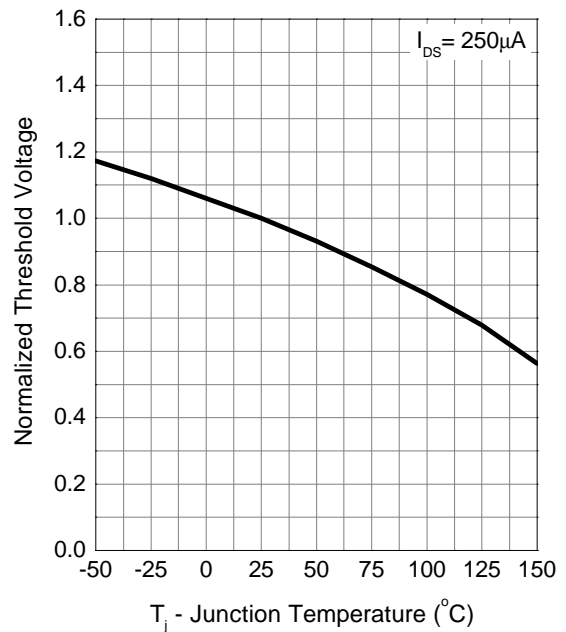


Typical Operating Characteristics (Cont.)


Drain-Source On Resistance

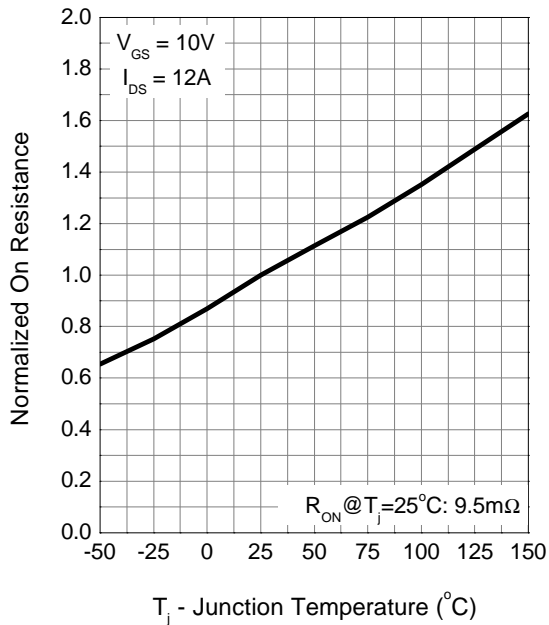


Source-Drain Diode Forward

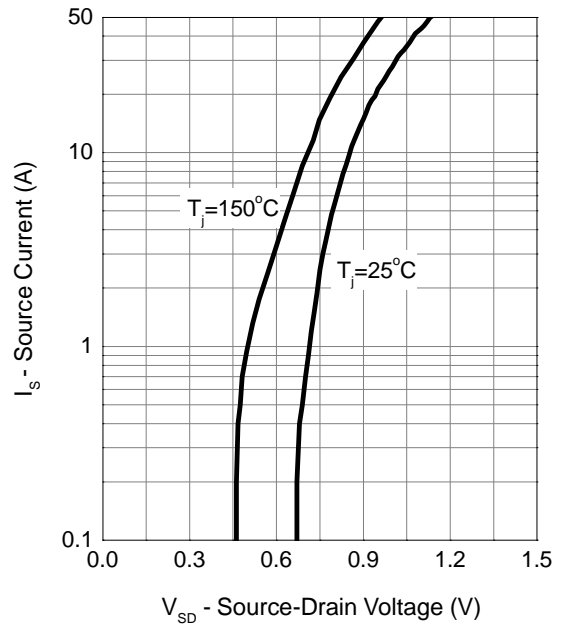

Capacitance

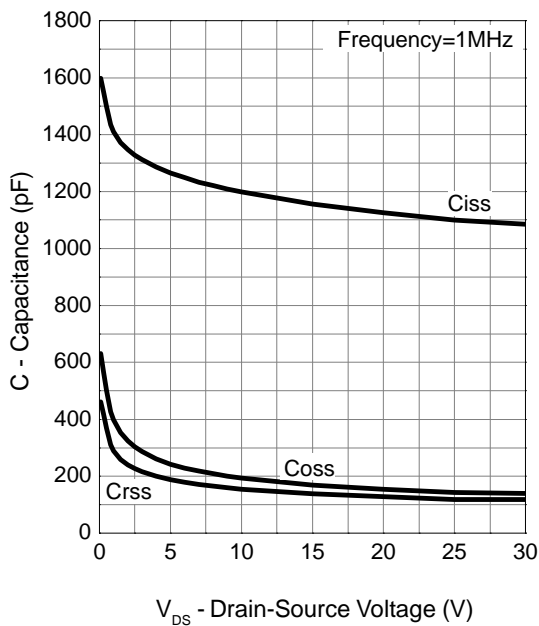


Gate Charge

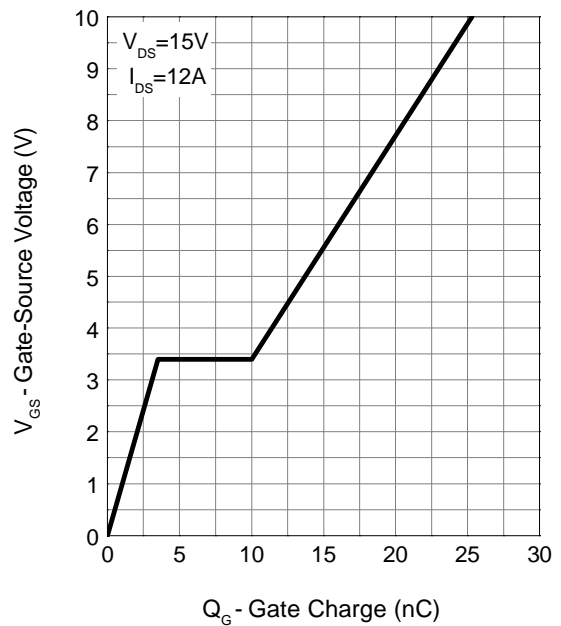

Package Information



SOP-8

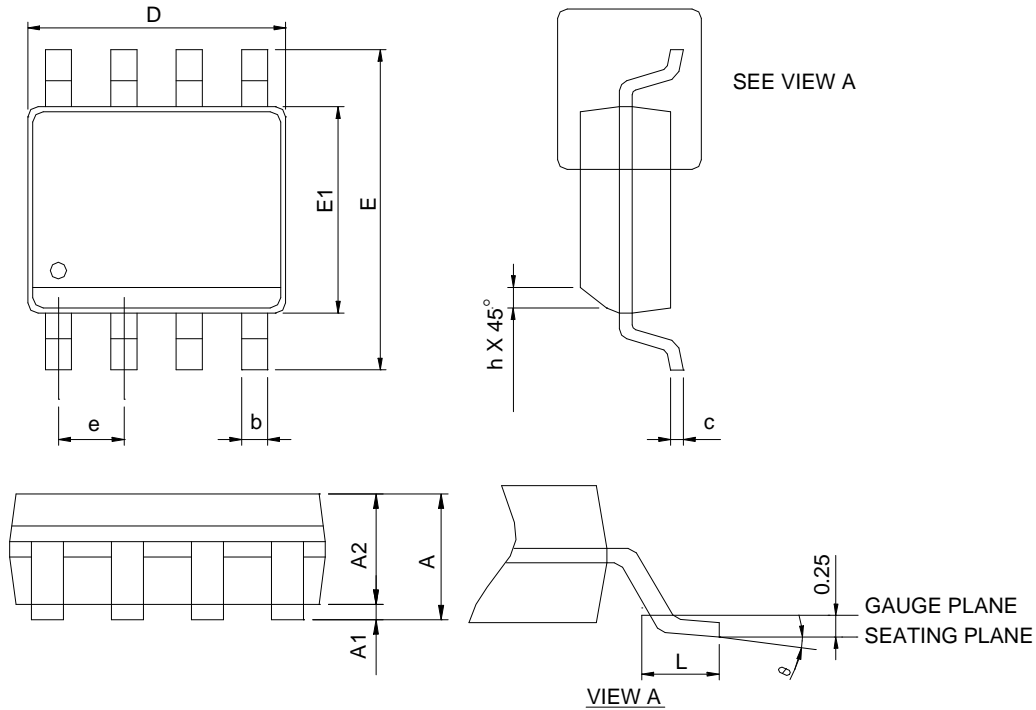

| SYMBOL   | SOP-8       |           |           |           |
|----------|-------------|-----------|-----------|-----------|
|          | MILLIMETERS |           | INCHES    |           |
|          | MIN.        | MAX.      | MIN.      | MAX.      |
| A        |             | 1.75      |           | 0.069     |
| A1       | 0.10        | 0.25      | 0.004     | 0.010     |
| A2       | 1.25        |           | 0.049     |           |
| b        | 0.31        | 0.51      | 0.012     | 0.020     |
| c        | 0.17        | 0.25      | 0.007     | 0.010     |
| D        | 4.80        | 5.00      | 0.189     | 0.197     |
| E        | 5.80        | 6.20      | 0.228     | 0.244     |
| E1       | 3.80        | 4.00      | 0.150     | 0.157     |
| e        | 1.27 BSC    |           | 0.050 BSC |           |
| h        | 0.25        | 0.50      | 0.010     | 0.020     |
| L        | 0.40        | 1.27      | 0.016     | 0.050     |
| $\theta$ | $0^\circ$   | $8^\circ$ | $0^\circ$ | $8^\circ$ |

- Note: 1. Follow JEDEC MS-012 AA.  
 2. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 6 mil per side.  
 3. Dimension "E" does not include inter-lead flash or protrusions. Inter-lead flash and protrusions shall not exceed 10 mil per side.

### Carrier Tape & Reel Dimensions

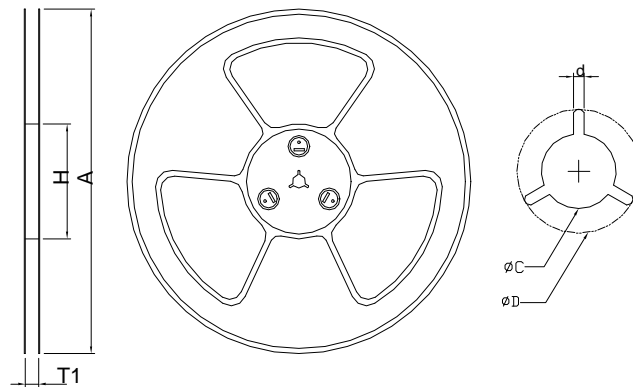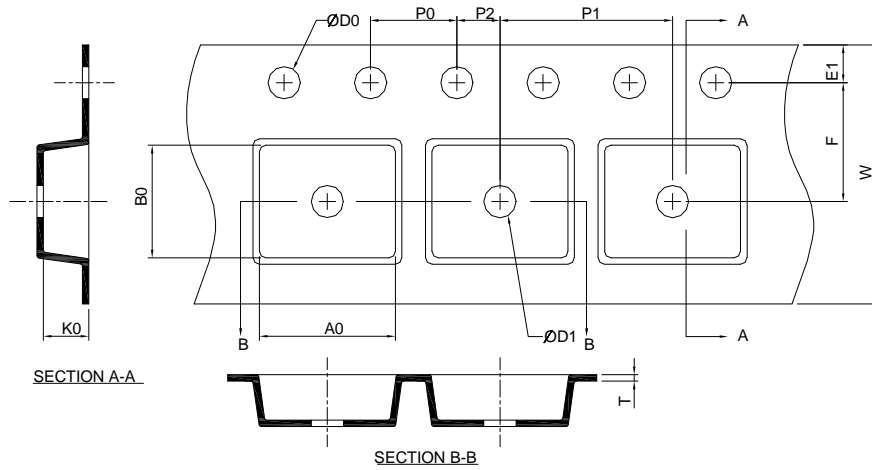

| Application | A           | H         | T1                 | C                  | d        | D                 | W          | E1         | F          |
|-------------|-------------|-----------|--------------------|--------------------|----------|-------------------|------------|------------|------------|
| SOP-8       | 330.0 ±2.00 | 50 MIN.   | 12.4+2.00<br>-0.00 | 13.0+0.50<br>-0.20 | 1.5 MIN. | 20.2 MIN.         | 12.0 ±0.30 | 1.75 ±0.10 | 5.5 ±0.05  |
|             | P0          | P1        | P2                 | D0                 | D1       | T                 | A0         | B0         | K0         |
|             | 4.0 ±0.10   | 8.0 ±0.10 | 2.0 ±0.05          | 1.5+0.10<br>-0.00  | 1.5 MIN. | 0.6+0.00<br>-0.40 | 6.40 ±0.20 | 5.20 ±0.20 | 2.10 ±0.20 |

(mm)


### Devices Per Unit

| Package Type | Unit        | Quantity |
|--------------|-------------|----------|
| SOP-8        | Tape & Reel | 2500     |




## Taping Direction Information

SOP-8

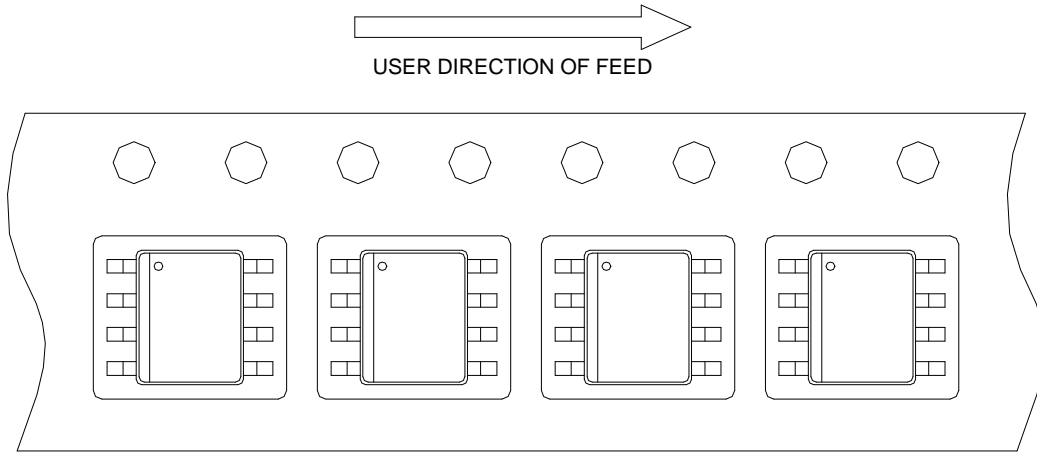

## Classification Profile

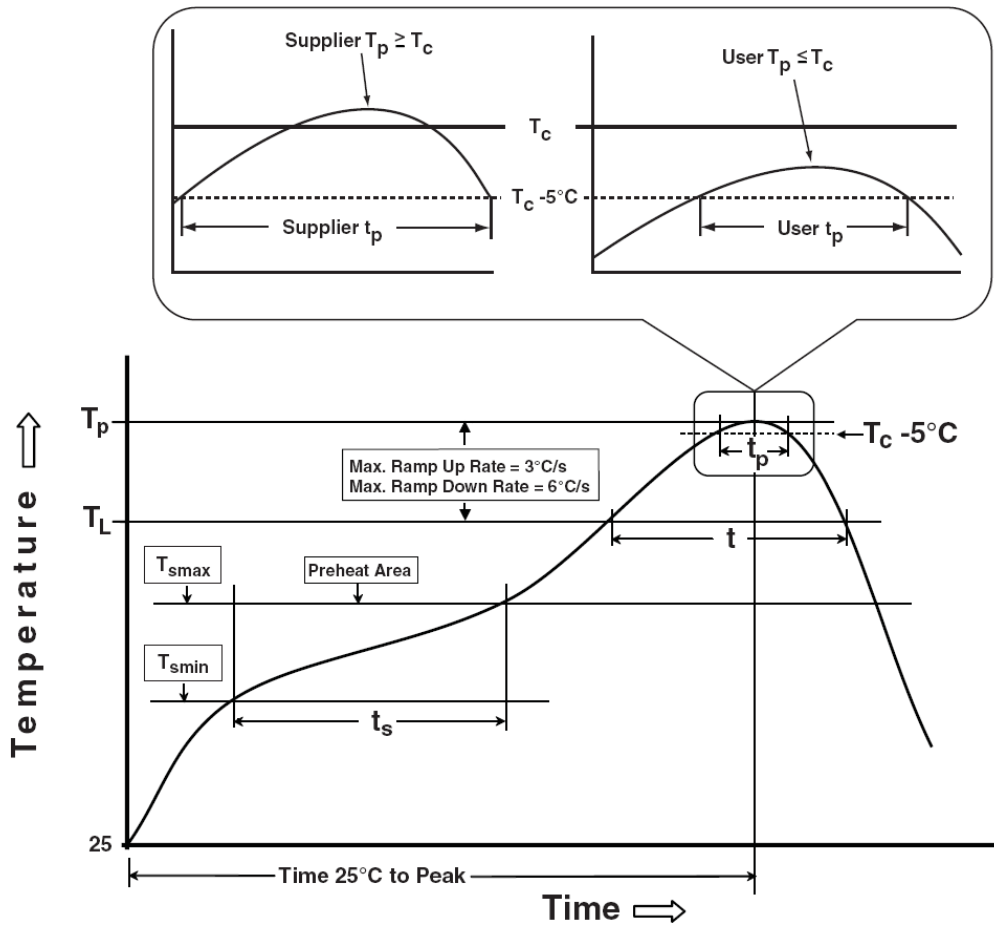

## Classification Reflow Profiles

| Profile Feature                                                                                                  | Sn-Pb Eutectic Assembly            | Pb-Free Assembly                   |
|------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|
| <b>Preheat &amp; Soak</b>                                                                                        |                                    |                                    |
| Temperature min ( $T_{smin}$ )                                                                                   | 100 °C                             | 150 °C                             |
| Temperature max ( $T_{smax}$ )                                                                                   | 150 °C                             | 200 °C                             |
| Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )                                                                      | 60-120 seconds                     | 60-120 seconds                     |
| Average ramp-up rate ( $T_{smax}$ to $T_p$ )                                                                     | 3 °C/second max.                   | 3°C/second max.                    |
| Liquidous temperature ( $T_L$ )                                                                                  | 183 °C                             | 217 °C                             |
| Time at liquidous ( $t_L$ )                                                                                      | 60-150 seconds                     | 60-150 seconds                     |
| Peak package body Temperature ( $T_p$ )*                                                                         | See Classification Temp in table 1 | See Classification Temp in table 2 |
| Time ( $t_p$ )** within 5°C of the specified classification temperature ( $T_c$ )                                | 20** seconds                       | 30** seconds                       |
| Average ramp-down rate ( $T_p$ to $T_{smax}$ )                                                                   | 6 °C/second max.                   | 6 °C/second max.                   |
| Time 25°C to peak temperature                                                                                    | 6 minutes max.                     | 8 minutes max.                     |
| * Tolerance for peak profile Temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.          |                                    |                                    |
| ** Tolerance for time at peak profile temperature ( $t_p$ ) is defined as a supplier minimum and a user maximum. |                                    |                                    |

Table 1. SnPb Eutectic Process – Classification Temperatures ( $T_c$ )

| Package Thickness | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> ≥350 |
|-------------------|-----------------------------|-----------------------------|
| <2.5 mm           | 235 °C                      | 220 °C                      |
| ≥2.5 mm           | 220 °C                      | 220 °C                      |

Table 2. Pb-free Process – Classification Temperatures ( $T_c$ )

| Package Thickness | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> 350-2000 | Volume mm <sup>3</sup> >2000 |
|-------------------|-----------------------------|---------------------------------|------------------------------|
| <1.6 mm           | 260 °C                      | 260 °C                          | 260 °C                       |
| 1.6 mm – 2.5 mm   | 260 °C                      | 250 °C                          | 245 °C                       |
| ≥2.5 mm           | 250 °C                      | 245 °C                          | 245 °C                       |

## Reliability Test Program

| Test item     | Method        | Description                  |
|---------------|---------------|------------------------------|
| SOLDERABILITY | JESD-22, B102 | 5 Sec, 245°C                 |
| HOLT          | JESD-22, A108 | 1000 Hrs, Bias @ 125°C       |
| PCT           | JESD-22, A102 | 168 Hrs, 100%RH, 2atm, 121°C |
| TCT           | JESD-22, A104 | 500 Cycles, -65°C~150°C      |

---

## Customer Service

### **Anpec Electronics Corp.**

Head Office :

No.6, Dusing 1st Road, SBIP,

Hsin-Chu, Taiwan, R.O.C.

Tel : 886-3-5642000

Fax : 886-3-5642050

Taipei Branch :

2F, No. 11, Lane 218, Sec 2 Jhongsing Rd.,

Sindain City, Taipei County 23146, Taiwan

Tel : 886-2-2910-3838

Fax : 886-2-2917-3838

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Sinopower](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)  
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)  
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)  
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)  
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)  
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)