


## Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Built-in strain relief,ideal for automated placement
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed 250°C/10 seconds at terminals

**SMAF**

 RoHS  
Compliant

 Pb  
Free

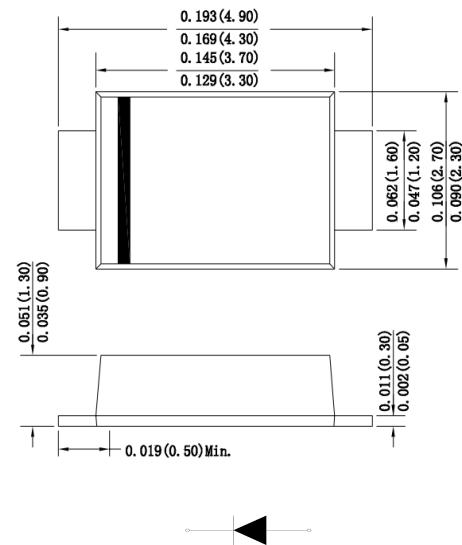

Dimensions in inches and (millimeters)

## Mechanical Data

**Case :** Molded plastic body

**Terminals :** Solder plated, solderable per MIL-STD-750,Method 2026

**Polarity :** Polarity symbol marking on body

**Mounting Position :** Any

**Weight :** 0.0014 ounce, 0.038 grams

## Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz,resistive or inductive load, for capacitive load current derate by 20%.

| Parameter  | SYMBOLS           | SS52F       | SS54F | SS56F      | SS58F | SS510F | SS515F | SS520F | UNITS |  |  |
|--|-------------------|-------------|-------|------------|-------|--------|--------|--------|-------|--|--|
| Maximum repetitive peak reverse voltage  | V <sub>RRM</sub>  | 20          | 40    | 60         | 80    | 100    | 150    | 200    | V     |  |  |
| Maximum RMS voltage  | V <sub>RMS</sub>  | 14          | 28    | 42         | 56    | 70     | 105    | 140    | V     |  |  |
| Maximum DC blocking voltage  | V <sub>DC</sub>   | 20          | 40    | 60         | 80    | 100    | 150    | 200    | V     |  |  |
| Maximum average forward rectified current at T <sub>L</sub> =100°C                                 | I <sub>(AV)</sub> | 5.0         |       |            |       |        |        | A      |       |  |  |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load                 | I <sub>FSM</sub>  | 120.0       |       |            |       |        |        | A      |       |  |  |
| Maximum instantaneous forward voltage at 5.0A  | V <sub>F</sub>    | 0.55        |       | 0.70       | 0.85  |        | 0.95   |        | V     |  |  |
| Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =125°C | I <sub>R</sub>    | 0.5<br>50   |       | 0.05<br>10 |       |        |        |        |       |  |  |
| Typical thermal resistance   | R <sub>QJA</sub>  | 70.0        |       |            |       |        |        | °C/W   |       |  |  |
| Operating junction temperature range   | T <sub>J</sub>    | -55 to +150 |       |            |       |        |        | °C     |       |  |  |
| Storage temperature range  | T <sub>STG</sub>  | -55 to +150 |       |            |       |        |        | °C     |       |  |  |

## Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

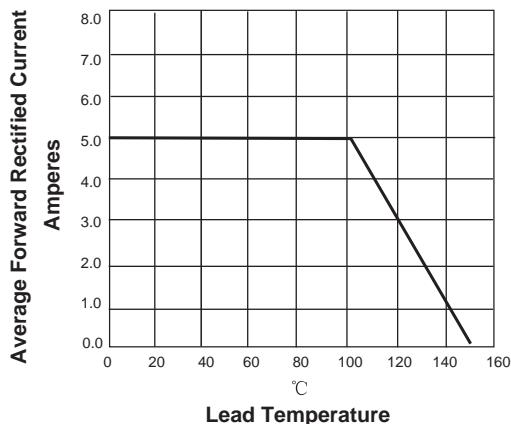


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

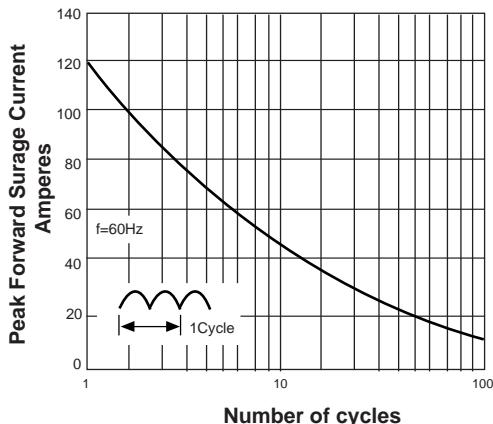


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS



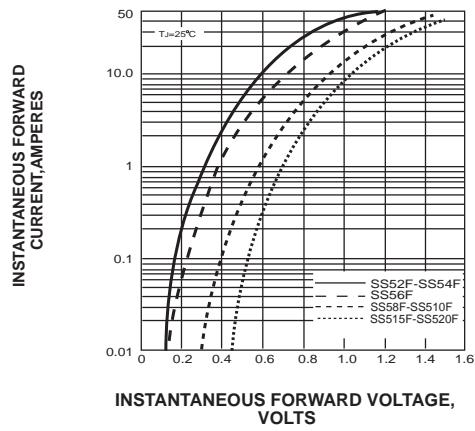


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

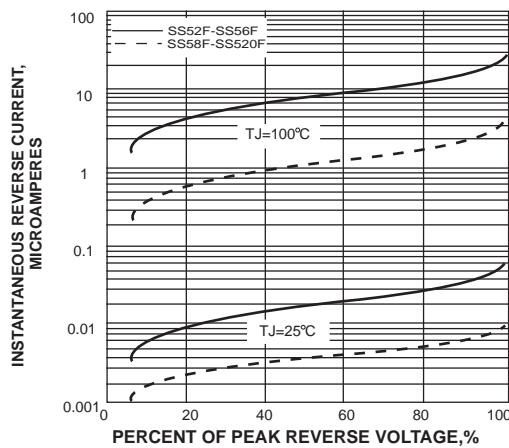


## Suggested Pad Layout

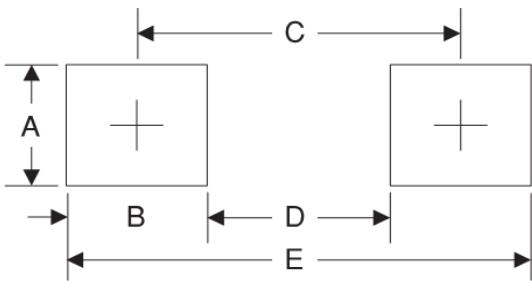

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A      | 1.68      | 0.066       |
| B      | 1.52      | 0.060       |
| C      | 3.90      | 0.154       |
| D      | 2.00      | 0.078       |
| E      | 5.10      | 0.200       |

## Suggested Soldering Temperature Profile

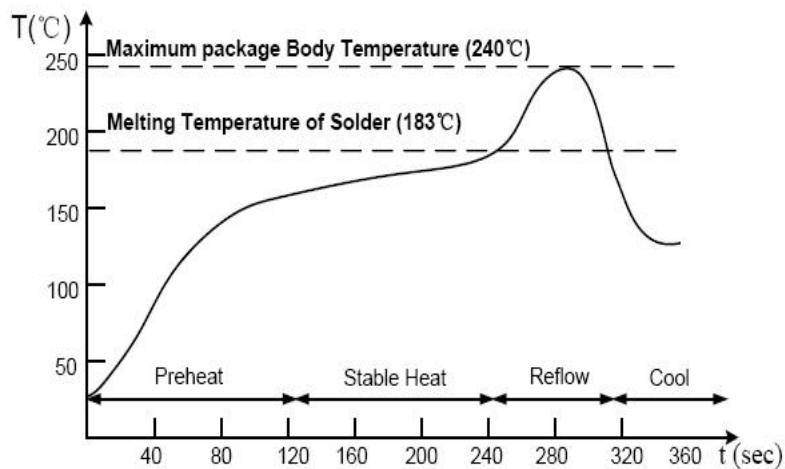


### Note

- ◆ Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- ◆ The device can be exposed to a maximum temperature of 265°C for 10 seconds.
- ◆ Devices can be cleaned using standard industry methods and solvents.
- ◆ If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

## Package Information

### Carrier Dimension(mm)

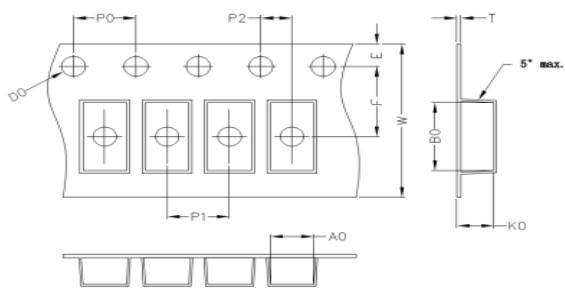

| A0   | B0   | K0   | D0   | E    | F         |
|------|------|------|------|------|-----------|
| 2.83 | 4.75 | 1.42 | 1.55 | 1.75 | 5.50      |
| P0   | P1   | P2   | T    | W    | Tolerance |
| 4.0  | 4.0  | 2.0  | 0.25 | 12   | 0.1       |

### Package Specifications

| Package | Reel Size | Reel DIA.<br>(mm) | Q'TY/Reel<br>(Kpcs) | Box Size<br>(mm) | QTY/Box<br>(Kpcs) | Carton Size<br>(mm) | Q'TY/Carton<br>(Kpcs) |
|---------|-----------|-------------------|---------------------|------------------|-------------------|---------------------|-----------------------|
| SMAF    | 7'        | 178               | 3                   | 180              | 12                | 380*200*200         | 120                   |
|         | 11'       | 278               | 7.5                 | 285              | 15                | 355*310*310         | 120                   |

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by Yenji manufacturer:***

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)