


## DUAL DIFFERENTIAL COMPARATOR

### DESCRIPTION


The HGsemi LM293 consists of two independent voltage comparators, designed specifically to operate from a single power supply over a wide voltage range.


### FEATURES

- \* Single or dual supply operation.
- \* Wide operating supply range  
( $V_{CC}=2V \sim 36V$  or  $\pm 1 \sim \pm 18V$ )
- \* Input common-mode voltage includes ground.
- \* Low supply current drain  $I_{CC}=0.8mA$  (Typical).
- \* Low input bias current  $I_{BIAS}=25nA$  (Typical).
- \* Output compatible with TTL, DTL, and CMOS logic system.

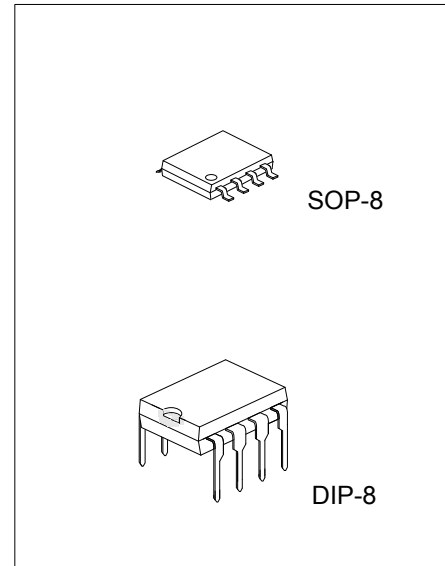

### PIN DESCRIPTION

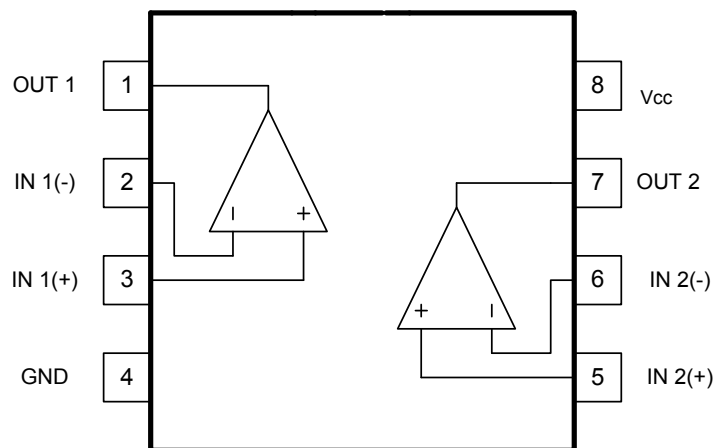

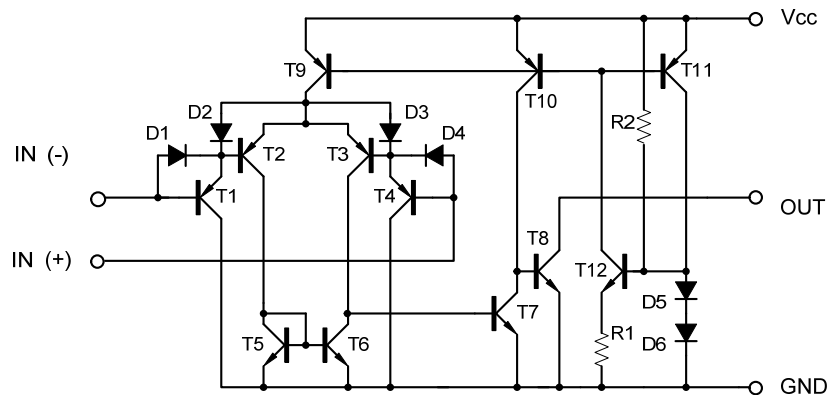**■ BLOCK DIAGRAM**

**■ ABSOLUTE MAXIMUM RATINGS**

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{CC}$	$\pm 18$ or $36$	V
Differential Input Voltage	$V_{I(DIFF)}$	36	V
Input Voltage	$V_{IN}$	$-0.3 \sim +36$	V
Power Dissipation	DIP-8	600	mW
	SOP-8	420	mW
Operating Temperature Range	$T_{OPR}$	$-20 \sim +85$	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	$-65 \sim +150$	$^{\circ}\text{C}$






Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

**■ ELECTRICAL CHARACTERISTICS**

( $V_{CC}=5.0\text{V}$ ,  $T_a=25^{\circ}\text{C}$ , All voltage referenced to GND unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	$V_{I(OFF)}$	$V_{CM}=0\text{V}$ to $V_{CC}-1.5\text{V}$ $V_{O(P)}=1.4\text{V}$ , $R_S=0\Omega$		1.0	5.0	mV
Output Saturation Voltage	$V_{SAT}$	$V_{I(-)}>1\text{V}$ , $V_{I(+)}=0\text{V}$ , $I_{SINK}=4\text{mA}$		160	400	mV
Input Common Mode Voltage	$V_{I(CM)}$	$V_{CC}=30\text{V}$	0		$V_{CC}-1.5$	V
Large Signal Voltage Gain	$G_V$	$V_{CC}=15\text{V}$ , $R_L \geq 15\text{k}\Omega$	50	200		V/mV
Power Supply Current	$I_{CC}$	$R_L=\infty$ , $V_{CC}=30\text{V}$		0.8	2.5	mA
					0.6	1.0
Input Offset Current	$I_{I(OFF)}$			5	50	nA
Input Bias Current	$I_{I(BIAS)}$			65	250	nA
Output Sink Current	$I_{O(SINK)}$	$V_{I(-)}>1\text{V}$ , $V_{I(+)}=0\text{V}$ , $V_{O(P)}<1.5\text{V}$	6	18		mA
Output Leakage Current	$I_{O(LEAK)}$	$V_{I(+)}=1\text{V}$ , $V_{I(-)}=0$		0.1		nA
					1.0	
Large Signal Response Time	$t_R$	$V_{IN}$ =TTL logic wing $V_{REF}=1.4\text{V}$ , $V_{RL}=5\text{V}$ , $R_L=5.1\text{k}\Omega$		350		ns
Response Time	$t_R$	$V_{RL}=5\text{V}$ , $R_L=5.1\text{k}\Omega$		1400		ns

■ TYPICAL CHARACTERISTICS

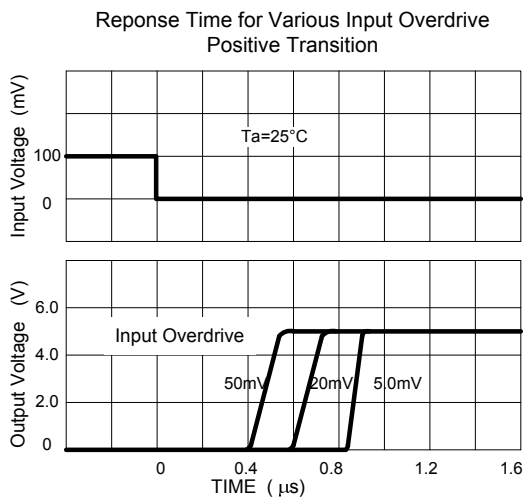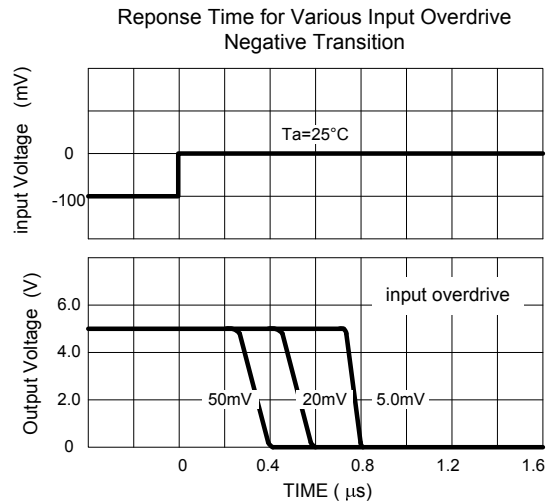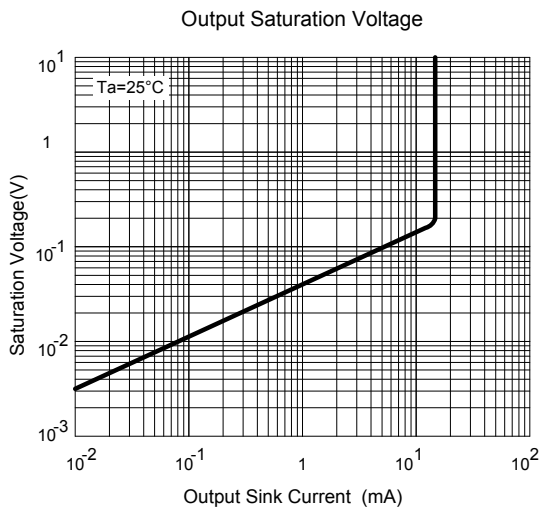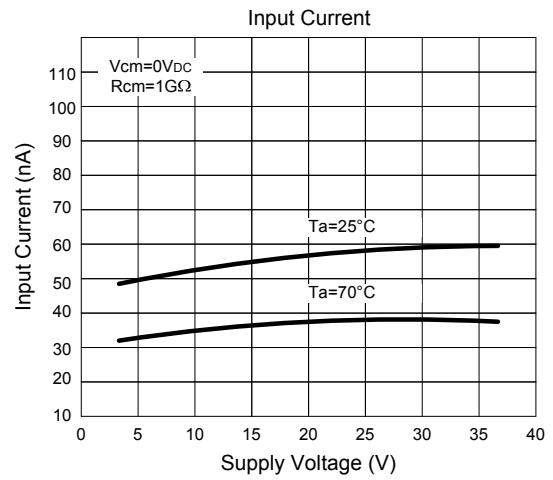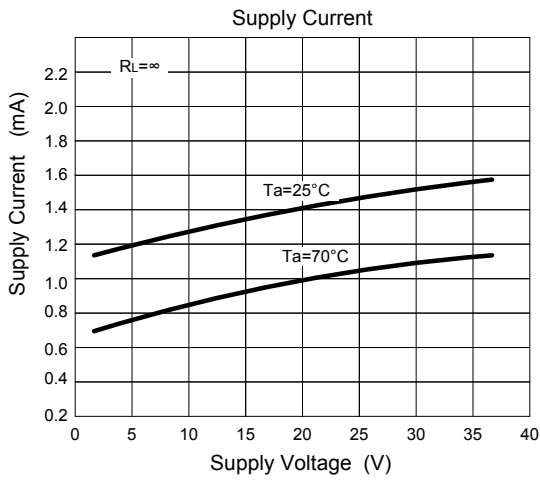

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Analog Comparators](#) category:*

*Click to view products by [HGSEMI](#) manufacturer:*

Other Similar products are found below :

[633740E](#) [ADCMP396ARZ-RL7](#) [NCV2200SN2T1G](#) [NCV2200SQ2T2G](#) [SC339DR2G](#) [LM2901SNG](#) [LM339SNG](#) [AP393AM8G-13](#)  
[418524AB](#) [TS393CD C3](#) [LM393SNG](#) [55122](#) [5962-8757203IA](#) [MAX971ESA+T](#) [MAX961ESAT](#) [MAX944ESD+T](#) [MAX931ESAT](#)  
[MAX984CPE](#) [MAX9062EBSTG45](#) [MAX9041AEUTT](#) [MAX9022ASAT](#) [RT2902YDT](#) [M38510/11201B2A](#) [NTE911](#) [5962-8751601DA](#)  
[5962-8751601CA](#) [MAX961EUA+T](#) [MAX9065EBS+TG45](#) [NCV2202SN2T1G](#) [MAX919ESA+T](#) [LT6700HS6-2#TRMPBF](#) [MAX19005CCS+](#)  
[LM339EDR2G](#) [LT6700HS6-2#TRM](#) [NTE919](#) [NTE922](#) [TS883IQ2T](#) [LT6700HVCS6-3#TRMPBF](#) [LT6700HVHS6-3#TRMPBF](#)  
[MAX978EEE+T](#) [MAX975ESA+T](#) [MAX9602EUG+T](#) [MAX997EUA+T](#) [MIC841NYC5-T5](#) [LM393WDT](#) [MCP6564T-E/STVAO](#)  
[MAX983ESA+T](#) [NCX2200GMAZ](#) [LTC1540CMS8#PBF](#) [MC10E1651FNG](#)