

## Φ2.4x7mm, RoHS Compliant & Pb-Free MICROFUSE (SLOW-BLOW) 微型保险丝管 (慢断型)

### INTERRUPTING CAPACITY / 分断能力:

30 amperes at 125V AC (100mA-7A)  
30 amperes at 250V AC (100mA-7A)  
100 amperes at 125V AC (1A-5A) PSE

### TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证									REFERENCE (A <sup>2</sup> Sec.) (RoHS) I <sup>2</sup> T 参考值		
		CCC		CQC		UR(cUR)		CSA		TÜV		PSE	
		H	H	H	L	H	L	H	L	L		L	
20T-0375H/L	375mA			●	●	●	●					0.1614	
20T-0400H/L	400mA			●	●	●	●					0.1713	
20T-0500H/L	500mA	●		●	●	●	●	●	●			0.3374	
20T-0600H/L	600mA			●	●	●	●	●	●			0.4662	
20T-0630H/L	630mA	●		●	●	●	●	●	●			0.4890	
20T-0750H/L	750mA			●	●	●	●	●	●			0.7074	
20T-0800H/L	800mA	●		●	●	●	●	●	●			0.8908	
20T-010H/L	1A	●		●	●	●	●	●	●	●		1.916	
20T-012H/L	1.2A			●	●	●	●	●	●	●		2.061	
20T-013H/L	1.25A	●		●	●	●	●	●	●	●		2.139	
20T-015H/L	1.5A			●	●	●	●	●	●	●		3.982	
20T-016H/L	1.6A	●		●	●	●	●	●	●	●		4.191	
20T-020H/L	2A	●		●	●	●	●	●	●	●		7.803	
20T-025H/L	2.5A	●		●	●	●	●	●	●	●		11.95	
20T-030H/L	3A			●	●	●	●			●		14.11	
20T-032H/L	3.15A	●		●	●	●	●			●		18.62	
20T-035H/L	3.5A			●	●	●	●			●		20.89	
20T-040H/L	4A	●		●	●	●	●			●		31.89	
20T-050H/L	5A		●	●	●	●	●			●		39.51	
20T-060H/L	6A			●	●	●	●					65.06	
20T-063H/L	6.3A	●		●	●	●	●					68.31	
20T-070H/L	7A			●	●	●	●					72.91	


● DENOTES FOR APPROVED      ● 表示已取得安全认证  
H DENOTES FOR 250V (H 代表 250V)      L DENOTES FOR 125V (L 代表 125V)

### ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-60 seconds	1-60 秒
300%	0.2-3 seconds	0.2-3 秒
800%	0.02-0.1 second	0.02-0.1 秒

### PACKING/ 包装:


1. INNER BOX/ 内盒: AMMO PACK

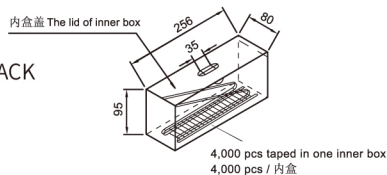

Unit 单位: mm

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON  
CARTON SIZE / 尺寸: L440x W270 x H230(mm)

### Dimensions/ 尺寸:

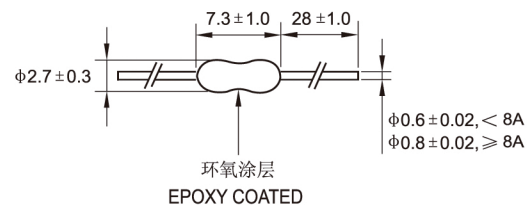

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C


Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

### 20T AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

20T 平均 I-T 曲线图 (仅供参考)

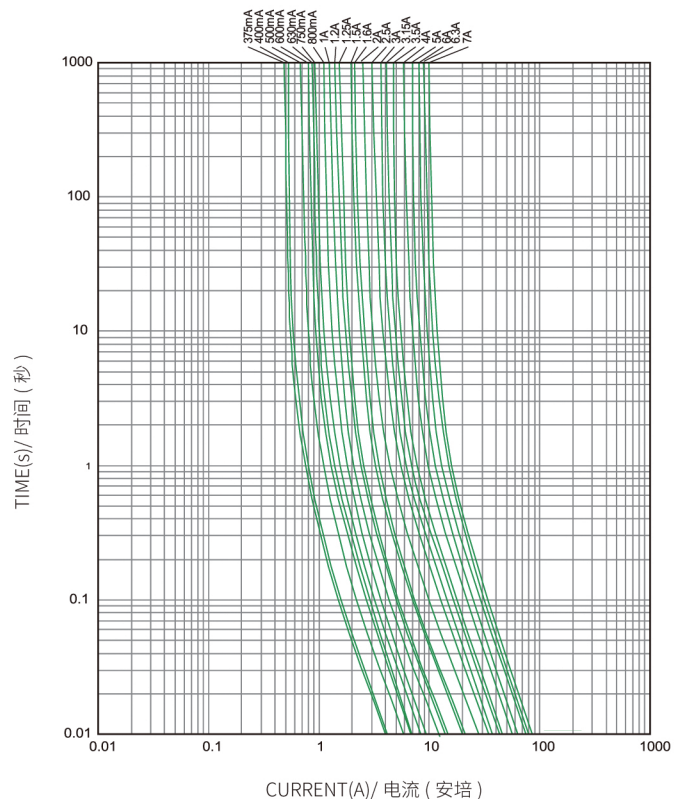

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuses with Leads \(Through Hole\)](#) category:*

*Click to view products by [HOLLY](#) manufacturer:*

Other Similar products are found below :

[89096-013](#) [89096-015](#) [A170100400](#) [BKPCH-5-R](#) [252010](#) [252.062](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [LKB-3](#) [0252001.M-0471005.MAT1L](#) [0473004.MAT1L](#) [0473.750HAT1L](#) [0471002.MAT1L](#) [0471.500MAT1L](#) [0491002.MAT1](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SR-5H-2.5A-AP](#) [SS-5-6.3A-BK](#) [BK-AGC-2-1-2-R](#) [BK-GMA-8-R](#) [BK-GMD-4-R](#) [BK-GMT-4A](#) [BK-MDL-1](#) [BK-PCD-5-R](#) [BK-C520-5-R](#) [BK-GMC-10-R](#) [BK-MDA-V-30-R](#) [BK-S500-500-R](#) [BK-SFE-20](#) [BK-GMA-1-25-R](#) [GMQ-3-2-10](#) [GLX-12](#) [PCB-34-R](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [PCF-1/2-R](#) [SR-5H-3.15A-BK](#) [SR-5H-2A-BK](#) [047101.5MAT1L](#) [0471003.MAT1L](#) [GFA-12](#) [89096-005](#) [SR-5F-1-6A-BK](#)