




Your Power Safeguard™
您的电路安全卫士

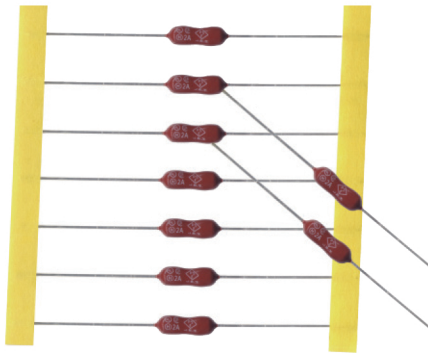

Φ3.6x10mm, RoHS Compliant SLOW-BLOW MICROFUSE 慢断型保险丝管

PATENT NO. 专利号: ZL 02220684.1

INTERRUPTING CAPACITY / 分断能力:

- 50 amperes at 125V/250V/ AC (100mA-10A)
- 30 amperes at 350V AC (200mA-1.6A)
- 50 amperes at 350V AC (2A-10A)
- 100 amperes at 125V/250V AC (1A-5A) PSE

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证												REFERENCE (A°.Sec.) (RoHS) I/T 参考值
		CCC		CQC	VDE	UL(cUL)		UR(cUR)		CSA		PSE		
		H ₂	H ₂	H ₂ /L	H ₁	H ₂	L	H ₁	H ₁	H ₂	L	H ₂	L	
30TS-0200H ₂ /H ₂ /L	200mA	●			●	●	●	●	●	●	●	●	●	0.02501
30TS-0250H ₂ /H ₂ /L	250mA	●		●	●	●	●	●	●	●	●	●	●	0.03851
30TS-0300H ₂ /H ₂ /L	300mA				●	●	●	●	●	●	●	●	●	0.06389
30TS-0315H ₂ /H ₂ /L	315mA	●		●	●	●	●	●	●	●	●	●	●	0.08730
30TS-0350H ₂ /H ₂ /L	350mA				●	●	●	●	●	●	●	●	●	0.1118
30TS-0375H ₂ /H ₂ /L	375mA				●	●	●	●	●	●	●	●	●	0.1426
30TS-0400H ₂ /H ₂ /L	400mA			●	●	●	●	●	●	●	●	●	●	0.1488
30TS-0500H ₂ /H ₂ /L	500mA	●		●	●	●	●	●	●	●	●	●	●	0.2581
30TS-0600H ₂ /H ₂ /L	600mA				●	●	●	●	●	●	●	●	●	0.4782
30TS-0630H ₂ /H ₂ /L	630mA	●		●	●	●	●	●	●	●	●	●	●	0.6634
30TS-0700H ₂ /H ₂ /L	700mA				●	●	●	●	●	●	●	●	●	0.8058
30TS-0750H ₂ /H ₂ /L	750mA				●	●	●	●	●	●	●	●	●	0.9581
30TS-0800H ₂ /H ₂ /L	800mA	●		●	●	●	●	●	●	●	●	●	●	1.227
30TS-010H ₁ /H ₂ /L	1A	●		●	●	●	●	●	●	●	●	●	●	2.063
30TS-012H ₁ /H ₂ /L	1.2A				●	●	●	●	●	●	●	●	●	4.005
30TS-013H ₁ /H ₂ /L	1.25A	●		●	●	●	●	●	●	●	●	●	●	4.101
30TS-015H ₁ /H ₂ /L	1.5A				●	●	●	●	●	●	●	●	●	5.725
30TS-016H ₁ /H ₂ /L	1.6A	●		●	●	●	●	●	●	●	●	●	●	6.024
30TS-020H ₁ /H ₂ /L	2A	●		●	●	●	●	●	●	●	●	●	●	12.05
30TS-023H ₁ /H ₂ /L	2.25A				●	●	●	●	●	●	●	●	●	15.36
30TS-025H ₁ /H ₂ /L	2.5A	●		●	●	●	●	●	●	●	●	●	●	20.53
30TS-030H ₁ /H ₂ /L	3A				●	●	●	●	●	●	●	●	●	27.28
30TS-032H ₁ /H ₂ /L	3.15A	●		●	●	●	●	●	●	●	●	●	●	30.07
30TS-035H ₁ /H ₂ /L	3.5A				●	●	●	●	●	●	●	●	●	34.43
30TS-040H ₁ /H ₂ /L	4A	●		●	●	●	●	●	●	●	●	●	●	57.55
30TS-050H ₁ /H ₂ /L	5A		●	●	●	●	●	●	●	●	●	●	●	98.26
30TS-060H ₁ /H ₂ /L	6A				●	●	●	●	●	●	●	●	●	29.38
30TS-063H ₁ /H ₂ /L	6.3A		●	●	●	●	●	●	●	●	●	●	●	33.44
30TS-070H ₁ /H ₂ /L	7A				●	●	●	●	●	●	●	●	●	44.28
30TS-080H ₁ /H ₂ /L	8A				●	●	●	●	●	●	●	●	●	62.39
30TS-090H ₁ /H ₂ /L	9A				●	●	●	●	●	●	●	●	●	78.70
30TS-100H ₁ /H ₂ /L	10A				●	●	●	●	●	●	●	●	●	109.5
30TS-120H ₁ /H ₂ /L	12A				●	●	●	●	●	●	●	●	●	187.1
30TS-150H ₁ /H ₂ /L	15A				●	●	●	●	●	●	●	●	●	345.2

● DENOTES FOR APPROVED ● 表示已取得安全认证
H₁ DENOTES FOR 350V (H₁ 代表 350V) H₂ DENOTES FOR 250V (H₂ 代表 250V)
L DENOTES FOR 125V (L 代表 125V)

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
200%	60seconds Max. 最慢 60 秒 (200mA-800mA) 1-60 seconds Max. 1-60 秒 (1A-10A)

Standards/ 标准: UL 248-1, UL 248-14


Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

Dimensions/ 尺寸:

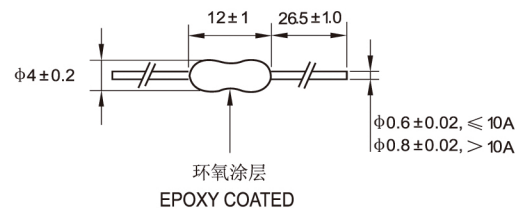


PACKING/ 包装:

1. INNER BOX/ 内盒: AMMO PACK


Unit 单位: mm

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON
CARTON SIZE / 尺寸: L400x W220 x H230(mm)

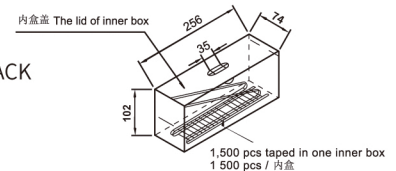

30TS AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

30TS 平均 I-T 曲线图 (仅供参考)

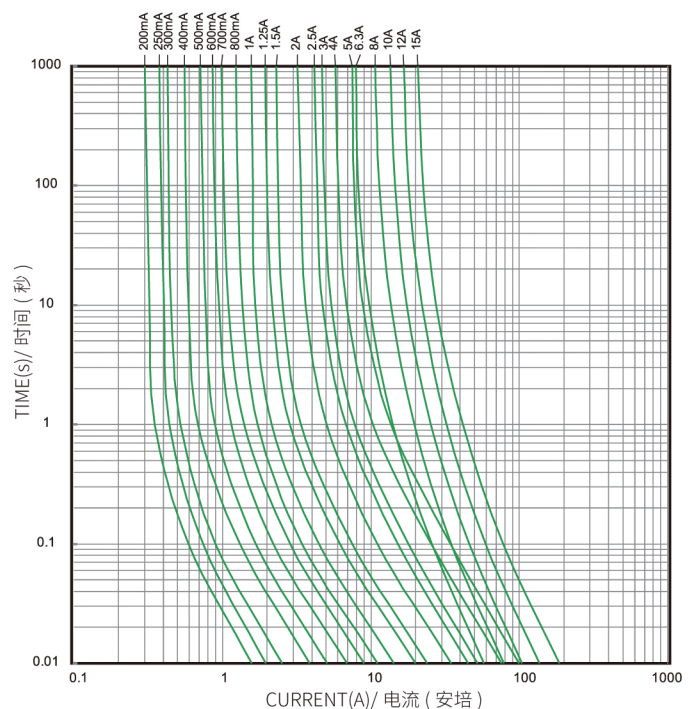

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuses with Leads \(Through Hole\)](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[89096-013](#) [89096-015](#) [A170100400](#) [BKPCH-5-R](#) [252010](#) [252.062](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [LKB-3](#) [0252001.M-0471005.MAT1L](#) [0473004.MAT1L](#) [0473.750HAT1L](#) [0471002.MAT1L](#) [0471.500MAT1L](#) [0491002.MAT1](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SR-5H-2.5A-AP](#) [SS-5-6.3A-BK](#) [BK-AGC-2-1-2-R](#) [BK-GMA-8-R](#) [BK-GMD-4-R](#) [BK-GMT-4A](#) [BK-MDL-1](#) [BK-PCD-5-R](#) [BK-C520-5-R](#) [BK-GMC-10-R](#) [BK-MDA-V-30-R](#) [BK-S500-500-R](#) [BK-SFE-20](#) [BK-GMA-1-25-R](#) [GMQ-3-2-10](#) [GLX-12](#) [PCB-34-R](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [PCF-1/2-R](#) [SR-5H-3.15A-BK](#) [SR-5H-2A-BK](#) [047101.5MAT1L](#) [0471003.MAT1L](#) [GFA-12](#) [89096-005](#) [SR-5F-1-6A-BK](#)