



Φ3.6x10mm IEC STANDARD FUSE
RoHS Compliant & Pb-Free
GLASS TUBE MICROFUSE (TIME-LAG)
玻璃保险丝管 (慢断型)

BREAKING CAPACITY / 分断能力:

CQC / VDE / cURus:

35A OR 10In 250V AC WHICHEVER IS GREATER


TECHNICAL PARAMETERS/ 技术参数:

| CATALOG NO. 目录编号 | CURRENT RATING 额定电流 | Max. VOLTAGE DROP (mv) 最大电压降 | SAFETY APPROVALS 安全认证 | | | | REFERENCE (A²·Sec.) (RoHS) I²T 参考值 |
|---------------------|------------------------|---------------------------------|--------------------------|-----|-------|-----|------------------------------------|
| | | | CQC | VDE | cURus | PSE | |
| 30T-0200H | 200mA | 260 | ● | | ● | | 0.1981 |
| 30T-0250H | 250mA | 240 | ● | ● | ● | | 0.3120 |
| 30T-0315H | 315mA | 220 | ● | ● | ● | | 0.5219 |
| 30T-0400H | 400mA | 200 | ● | ● | ● | | 0.8606 |
| 30T-0500H | 500mA | 190 | ● | ● | ● | | 1.323 |
| 30T-0630H | 630mA | 180 | ● | ● | ● | | 2.473 |
| 30T-0800H | 800mA | 160 | ● | ● | ● | | 4.165 |
| 30T-010H | 1A | 140 | ● | ● | ● | ● | 2.811 |
| 30T-013H | 1.25A | 130 | ● | ● | ● | ● | 5.300 |
| 30T-016H | 1.6A | 120 | ● | ● | ● | ● | 6.315 |
| 30T-020H | 2A | 100 | ● | ● | ● | ● | 9.668 |
| 30T-025H | 2.5A | 100 | ● | ● | ● | ● | 16.72 |
| 30T-032H | 3.15A | 100 | ● | ● | ● | ● | 28.92 |
| 30T-040H | 4A | 100 | ● | ● | ● | ● | 60.86 |
| 30T-050H | 5A | 100 | ● | ● | ● | ● | 84.99 |
| 30T-063H | 6.3A | 100 | ● | ● | | | 213.8 |

● DENOTES FOR APPROVED
H DENOTES FOR 250V

● 表示已取得安全认证
H 代表 250V

Dimensions/ 尺寸:

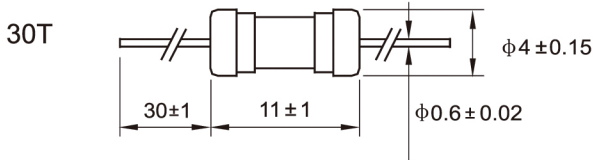

Standards/ 标准: IEC 60127 GB 9364

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.


Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

ELECTRICAL CHARACTERISTICS/ 电气特性:

| RATING 额定 | | BLOWING TIME 熔断时间 |
|-----------|---------|-------------------|
| 2.1In | Max. 最慢 | 2 minutes |
| | Min. 最快 | 400 ms |
| 2.75In | Max. 最慢 | 10 seconds |
| | Min. 最快 | 150 ms |
| 4In | Max. 最慢 | 3 seconds |
| | Min. 最快 | 20 ms |
| 10In | Max. 最慢 | 150 ms |

30T AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

30T 平均 I-T 曲线图 (仅供参考)

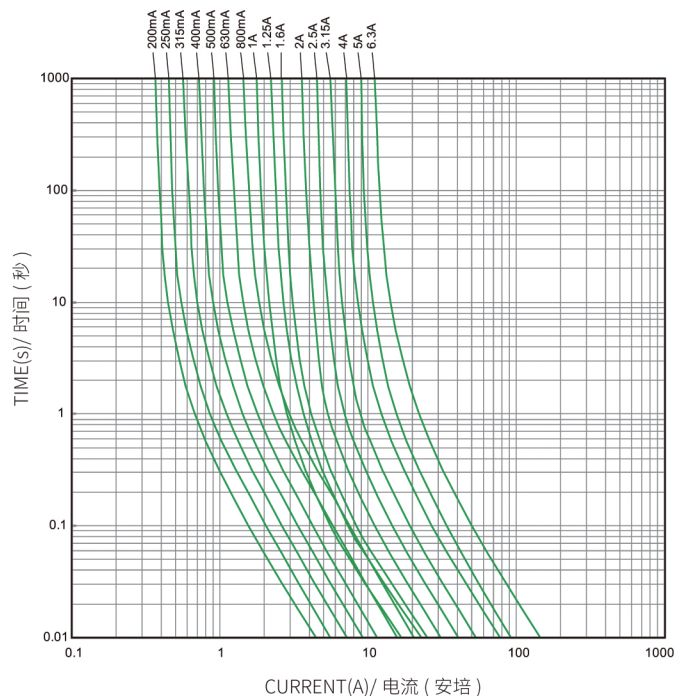

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[MBO-20](#) [MDA-V-1/100](#) [12C10X38GI](#) [AGA-V-2-1/2](#) [AGC-V-3-12-R](#) [AGY-50](#) [MSL-3](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#)
[BK1-GMA-200-R](#) [BK1GMA-6-R](#) [BK1/GMC-100-R](#) [BK1/GMC-1.5-R](#) [BK1-GMC-2-5-R](#) [BK1GMD-4-R](#) [BK1S500-250-R](#) [BK1S500-32-R](#)
[BK1-S500-4-R](#) [BK1S500-5-R](#) [BK1-S505-1-R](#) [BK1-S506-2-R](#) [BK1-S506-3-15-R](#) [BK1/S506-63-R](#) [BK/ABC-5RX](#) [BK/AGW-B-4](#) [BK/AVX-](#)
[1/4](#) [BK/C515S-250-R](#) [BK/MBO-20](#) [BK/MBO-8](#) [BK/MDM-3/4](#) [BK-MDQ-4](#) [BK/S505-V-2.5A](#) [BK/TDC120-15](#) [BK/TDC120-20](#)
[BK/TDC122-45](#) [BP/MDL-7](#) [1C10X38AM](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [AGA-V-7-1/2](#) [AGC-15WX](#) [AGC-2-1-2-R](#) [20.0M6.3X32F](#)
[20C8X32GI](#) [GMC-50-R](#) [361.250](#) [MBO-8](#) [TDC121-30](#)